



Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
CP-E7240 400V 3N

19074780

04/09/2023

DENOMINATION:

Electric pasta cooker, 2 wells of 40 L, 700 range.

DESCRIPTION :

- Surface tops manufactured in 1.5 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- 1.5 mm thick AISI-316L stainless steel wells built into the surface top.
- The well is filled through the inlet solenoid valve with a two-position switch: average and high-speed filling.
- Well drainage through a mechanical ball valve which is resistant to high temperatures and has a safety overflow.
- Automatic safety system to stop the current if the water runs out.
- Controls with a protective support base and system to prevent water infiltration.
- Machines with IPX5 grade water protection."
- GN-1/1 wells, with 40 litre capacity (they can be used with different positions of baskets of different sizes).
- GN-1/1 wells, with 40 litre capacity (they can be used with different positions of baskets of different sizes).

POSSIBLE OPTIONS :

- 230 1N- Transformation A 230 V single phase
- 230 III - A 230 V three-phase transformation without neutral
- MARINE - Other machines - Ship transformation - 440 III


POSSIBLE ACCESSORIES :

- COOKING
- KORE WHEELS
- PASTA COOKER ACCESSORIES KORE
- TALL CHIMNEY KORE

SUPPLIED ACCESSORIES:

- 12008637 GN 1/3 cooking basket 6

DIMENSIONS



X Width	800 mm	X Gross width	840 mm
Y Depth	730 mm	Y Gross depth	822 mm
Z Height	850 mm	Z Gross height	1255 mm
Net Weight	80,0 kg	Gross Weight	98,0 kg
Net volume	0,500 m3	Gross volume	0,867 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	24,000 kW
Amperage (A)	34,8A
Heating power	24,00 kW
Voltage	400V - 3N
Electric frequency	50/60Hz

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	0,00 L/h

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	3X16MM2+T
Single-phase 230V wiring	2X35MM2+T
Three-phase +N 400V wiring	3X6MM2+T+N
Water inlet diameter	3/4"
Drain 1 diameter	1"




Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
CP-E7240 400V 3N



19074780

04/09/2023

CP-E7140

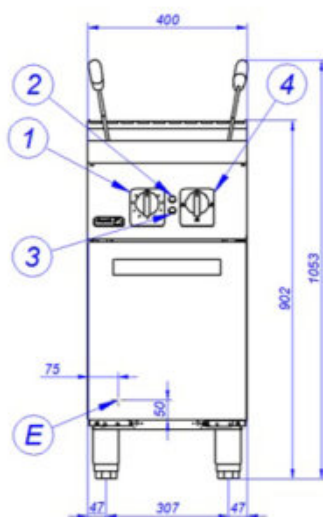

CP-E7240

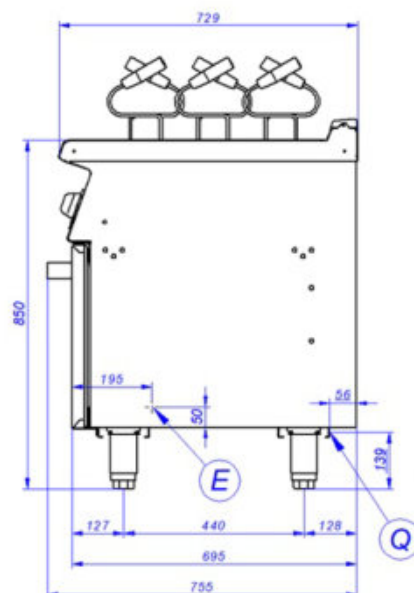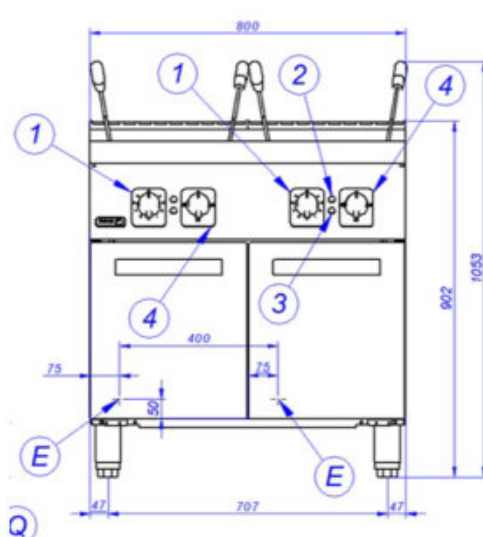

E – Conexión eléctrica

Q – Conexión equipotencial

1 – Mando termostato

2 – Piloto verde

3 – Piloto ámbar

4 – Mando entrada agua

Electrical connection

Equipotential connection

Thermostat control

Green pilot

Amber pilot

Water control

Connexion électrique

Connexion équipotentiel

Commande de thermostat

Lumière verte

Lumière ambre

Commande d'entrée d'eau