

UIGU



3 - 17	CONSERVATORS
18 - 22	CHEST FREEZERS
23 - 25	ENERGY EFFICIENT CHEST FREEZERS
26 - 28	ENERGY EFFICIENT UPRIGHT FREEZERS
29 - 32	UPRIGHT FREEZERS
33 - 35	CHEST BOTTLE COOLERS
36 - 38	COUNTER TOP BOTTLE COOLERS
39 - 40	CAN COOLERS OPEN TOP COOLERS
41 - 52	SINGLE-DOUBLE DOOR BOTTLE COOLERS
53 - 58	PREMIUM COOLERS
59 - 61	SUB-ZERO BOTTLE COOLERS
62 - 63	WINE COOLERS
64 - 66	OPEN FRONT COOLERS
67 - 91	SUPERMARKET FREEZERS-COOLERS
92 - 93	POOL TYPE SHOWCASES
94 - 98	ICE CREAM SHOWCASES
99 - 102	COLD BEVERAGE DISPENSERS
103-105	PASTRY DISPLAY CABINETS
106-108	ICE MACHINES
109-110	WATER DISPENSER



index

CONSERVATORS

CONSERVATORS



UDD 100 SC

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	117/93
Gross/Net Weight (kg)	43/35
Dimensions WxDxH (mm)	
Internal	450x450x520
External	568x568x897
With Packing	600x600x970
Loadability (pcs)	
20ft Dc	54
40ft Dc	114
80 m³ Truck	264
Shelves/Baskets (pcs)	1
Input Power (W)	193
Energy Cons. (kWh/24h)	2,68
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A
Noise Level (dB(A))	48

UDD 200 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	194/149
Gross/Net Weight (kg)	58/47
Dimensions WxDxH (mm)	
Internal	600x510x715
External	719x629x892
With Packing	800x750x880
Loadability (pcs)	
20ft Dc	42
40ft Dc	88
80 m³ Truck	162
Shelves/Baskets (pcs)	1
Input Power (W)	145/98
Energy Cons. (kWh/24h)	1,94/1,321
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48

UDD 300 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	300/234
Gross/Net Weight (kg)	70/56
Dimensions WxDxH (mm)	
Internal	890x510x715
External	1009x629x892
With Packing	1100x750x880
Loadability (pcs)	
20ft Dc	30
40ft Dc	64
80 m³ Truck	108
Shelves/Baskets (pcs)	1
Input Power (W)	292/119
Energy Cons. (kWh/24h)	3,848/1,48
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48

CONSERVATORS



UDD 400 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	407/319
Gross/Net Weight (kg)	80/65
Dimensions WxDxH (mm)	
Internal	1180x510x715
External	1298x629x892
With Packing	1400x750x880
Loadability (pcs)	
20ft Dc	24
40ft Dc	50
80 m³ Truck	84
Shelves/Baskets (pcs)	2
Input Power (W)	366/141
Energy Cons. (kWh/24h)	4,4/1,93
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 500 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	498/392
Gross/Net Weight (kg)	101/85
Dimensions WxDxH (mm)	
Internal	1430x510x715
External	1548x629x892
With Packing	1640x750x880
Loadability (pcs)	
20ft Dc	20
40ft Dc	44
80 m³ Truck	75
Shelves/Baskets (pcs)	2
Input Power (W)	287/191
Energy Cons. (kWh/24h)	4,17/2,39
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 550 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	572/451
Gross/Net Weight (kg)	114/96
Dimensions WxDxH (mm)	
Internal	1630x510x715
External	1750x629x892
With Packing	1845x750x880
Loadability (pcs)	
20ft Dc	18
40ft Dc	38
80 m³ Truck	63
Shelves/Baskets (pcs)	3
Input Power (W)	330/273
Energy Cons. (kWh/24h)	4,88/3,79
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

CONSERVATORS



UDD 600 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	682/539
Gross/Net Weight (kg)	120/99
Dimensions WxDxH (mm)	
Internal	1930x510x715
External	2055x629x892
With Packing	2150x750x880
Loadability (pcs)	
20ft Dc	16
40ft Dc	32
80 m³ Truck	54
Shelves/Baskets (pcs)	3
Input Power (W)	364/292
Energy Cons. (kWh/24h)	5,24/3,57
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 100 SCE

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	103/77
Gross/Net Weight (kg)	49/41
Dimensions WxDxH (mm)	
Internal	450x450x490/385
External	568x568x897/777
With Packing	610x610x970
Loadability (pcs)	
20ft Dc	54
40ft Dc	114
80 m³ Truck	264
Shelves/Baskets (pcs)	1
Input Power (W)	80
Energy Cons. (kWh/24h)	1,67
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A
Noise Level (dB(A))	48

UDD 200 SCE

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	109/146
Gross/Net Weight (kg)	57/45
Dimensions WxDxH (mm)	
Internal	600x500x708/610
External	719x615x950/832
With Packing	740x750x940
Loadability (pcs)	
20ft Dc	48
40ft Dc	102
80 m³ Truck	114
Shelves/Baskets (pcs)	1
Input Power (W)	183/86
Energy Cons. (kWh/24h)	2,28/1,3
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48

CONSERVATORS



UDD 300 SCE

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	293/229
Gross/Net Weight (kg)	70/56
Dimensions WxDxH (mm)	
Internal	890x500x708/610
External	1009x615x950/832
With Packing	1100x750x940
Loadability (pcs)	
20ft Dc	32
40ft Dc	68
80 m³ Truck	76
Shelves/Baskets (pcs)	1
Input Power (W)	337/165
Energy Cons. (kWh/24h)	5,58/2,69
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48

UDD 400 SCE

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	352/325
Gross/Net Weight (kg)	81/65
Dimensions WxDxH (mm)	
Internal	1180x500x708/610
External	1298x615x950/832
With Packing	1400x750x940
Loadability (pcs)	
20ft Dc	24
40ft Dc	50
80 m³ Truck	60
Shelves/Baskets (pcs)	2
Input Power (W)	298/168
Energy Cons. (kWh/24h)	4/2,64
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 500 SCE

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	427/385
Gross/Net Weight (kg)	96/79
Dimensions WxDxH (mm)	
Internal	1430x500x708/610
External	1548x615x950/832
With Packing	1640x750x940
Loadability (pcs)	
20ft Dc	20
40ft Dc	42
80 m³ Truck	75
Shelves/Baskets (pcs)	2
Input Power (W)	400
Energy Cons. (kWh/24h)	5,2
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

CONSERVATORS



UDD 550 SCE

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	488/398
Gross/Net Weight (kg)	114/96
Dimensions WxDxH (mm)	
Internal	1630x500x708/610
External	1750x615x950/832
With Packing	1845x750x940
Loadability (pcs)	
20ft Dc	18
40ft Dc	40
80 m³ Truck	1
Shelves/Baskets (pcs)	2
Input Power (W)	420
Energy Cons. (kWh/24h)	6,8
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 100 SCB

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	117/93
Gross/Net Weight (kg)	43/35
Dimensions WxDxH (mm)	
Internal	450x450x520
External	568x568x897
With Packing	600x600x970
Loadability (pcs)	
20ft Dc	54
40ft Dc	114
80 m³ Truck	264
Shelves/Baskets (pcs)	1
Input Power (W)	80
Energy Cons. (kWh/24h)	1,001
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R600a
Noise Level (dB(A))	48

UDD 200 SCB

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	194/149
Gross/Net Weight (kg)	58/47
Dimensions WxDxH (mm)	
Internal	600x510x715
External	719x629x892
With Packing	800x750x960
Loadability (pcs)	
20ft Dc	42
40ft Dc	92
80 m³ Truck	108
Shelves/Baskets (pcs)	1
Input Power (W)	190/98
Energy Cons. (kWh/24h)	2,70/1,32
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48

CONSERVATORS



UDD 300 SCB

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	300/234
Gross/Net Weight (kg)	70/56
Dimensions WxDxH (mm)	
Internal	890x510x715
External	1009x629x892
With Packing	1100x750x880
Loadability (pcs)	
20ft Dc	30
40ft Dc	64
80 m³ Truck	108
Shelves/Baskets (pcs)	1
Input Power (W)	254/141
Energy Cons. (kWh/24h)	3,848/1,48
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 400 SCB

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	407/319
Gross/Net Weight (kg)	80/65
Dimensions WxDxH (mm)	
Internal	1180x510x715
External	1298x629x892
With Packing	1400x750x880
Loadability (pcs)	
20ft Dc	24
40ft Dc	50
80 m³ Truck	84
Shelves/Baskets (pcs)	2
Input Power (W)	254/141
Energy Cons. (kWh/24h)	3,85/1,93
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 500 SCB

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	491/430
Gross/Net Weight (kg)	101/85
Dimensions WxDxH (mm)	
Internal	1430x510x715
External	1548x629x892
With Packing	1640x750x880
Loadability (pcs)	
20ft Dc	20
40ft Dc	42
80 m³ Truck	72
Shelves/Baskets (pcs)	2
Input Power (W)	292/191
Energy Cons. (kWh/24h)	4,063/2,39
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

CONSERVATORS



UDD 550 SCB

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	572/451
Gross/Net Weight (kg)	114/96
Dimensions WxDxH (mm)	
Internal	1630x510x715
External	1750x629x892
With Packing	1845x750x880
Loadability (pcs)	
20ft Dc	18
40ft Dc	38
80 m³ Truck	63
Shelves/Baskets (pcs)	3
Input Power (W)	330/273
Energy Cons. (kWh/24h)	4,89/3,79
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 100 SCEB

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	103/77
Gross/Net Weight (kg)	49/41
Dimensions WxDxH (mm)	
Internal	450x450x490/385
External	568x568x897/777
With Packing	600x600x970
Loadability (pcs)	
20ft Dc	54
40ft Dc	114
80 m³ Truck	264
Shelves/Baskets (pcs)	1
Input Power (W)	716/150
Energy Cons. (kWh/24h)	1,80/1,67
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48

UDD 200 SCEB

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	146/109
Gross/Net Weight (kg)	57/45
Dimensions WxDxH (mm)	
Internal	600x500x708/610
External	719x615x950/829
With Packing	800x750x940
Loadability (pcs)	
20ft Dc	42
40ft Dc	88
80 m³ Truck	162
Shelves/Baskets (pcs)	1
Input Power (W)	169/86
Energy Cons. (kWh/24h)	1,96/1,3
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48

CONSERVATORS



UDD 300 SCEB

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	293,5/229
Gross/Net Weight (kg)	70/56
Dimensions WxDxH (mm)	
Internal	890x500x708/610
External	1009x615x950/829
With Packing	1100x750x940
Loadability (pcs)	
20ft Dc	30
40ft Dc	64
80 m³ Truck	108
Shelves/Baskets (pcs)	1
Input Power (W)	337/157
Energy Cons. (kWh/24h)	5,58/2,23
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 400 SCEB

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	350/296
Gross/Net Weight (kg)	81/65
Dimensions WxDxH (mm)	
Internal	1180x500x708/610
External	1298x615x950/829
With Packing	1400x750x940
Loadability (pcs)	
20ft Dc	24
40ft Dc	50
80 m³ Truck	84
Shelves/Baskets (pcs)	2
Input Power (W)	300/168
Energy Cons. (kWh/24h)	4,9/2,64
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48

UDD 500 SCEB

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	427/398
Gross/Net Weight (kg)	96/79
Dimensions WxDxH (mm)	
Internal	1430x500x708/610
External	1548x615x950/829
With Packing	1640x750x940
Loadability (pcs)	
20ft Dc	20
40ft Dc	42
80 m³ Truck	72
Shelves/Baskets (pcs)	2
Input Power (W)	348/276
Energy Cons. (kWh/24h)	5,24/3,76
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

CONSERVATORS



UDD 550 SCEB

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	488/385
Gross/Net Weight (kg)	114/96
Dimensions WxDxH (mm)	
Internal	1630x4500x708/610
External	1750x615x950/829
With Packing	1845x750x940
Loadability (pcs)	
20ft Dc	18
40ft Dc	38
80 m³ Truck	63
Shelves/Baskets (pcs)	2
Input Power (W)	359/239
Energy Cons. (kWh/24h)	6,01/3,96
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 200 SCN

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	187/132
Gross/Net Weight (kg)	63/52
Dimensions WxDxH (mm)	
Internal	600x510x576
External	740x650x890
With Packing	800x670x940
Loadability (pcs)	
20ft Dc	42
40ft Dc	84
80 m³ Truck	
Shelves/Baskets (pcs)	1
Input Power (W)	89
Energy Cons. (kWh/24h)	1
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R600a
Noise Level (dB(A))	48

UDD 300 SCN

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	290/209
Gross/Net Weight (kg)	76/62
Dimensions WxDxH (mm)	
Internal	890x510x576
External	1030x650x890
With Packing	1040x670x940
Loadability (pcs)	
20ft Dc	32
40ft Dc	68
80 m³ Truck	120
Shelves/Baskets (pcs)	1
Input Power (W)	204/132
Energy Cons. (kWh/24h)	2,56/1,64
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

CONSERVATORS



UDD 400 SCN

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	394/286
Gross/Net Weight (kg)	87/72
Dimensions WxDxH (mm)	
Internal	1180x510x576
External	1320x650x890
With Packing	1330x670x940
Loadability (pcs)	
20ft Dc	24
40ft Dc	50
80 m³ Truck	90
Shelves/Baskets (pcs)	2
Input Power (W)	222/137
Energy Cons. (kWh/24h)	2,79/1,8
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48

UDD 500 SCN

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	483/352
Gross/Net Weight (kg)	122/110
Dimensions WxDxH (mm)	
Internal	1430x510x576
External	1570x650x890
With Packing	1580x670x940
Loadability (pcs)	
20ft Dc	20
40ft Dc	44
80 m³ Truck	75
Shelves/Baskets (pcs)	2
Input Power (W)	268/168
Energy Cons. (kWh/24h)	3,65/2,45
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48

UDD 100 SCEBN

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	152/117
Gross/Net Weight (kg)	56/47
Dimensions WxDxH (mm)	
Internal	510x515x590
External	645x650x807/940
With Packing	700x700x1000
Loadability (pcs)	
20ft Dc	48
40ft Dc	102
80 m³ Truck	114
Shelves/Baskets (pcs)	1
Input Power (W)	190/71
Energy Cons. (kWh/24h)	2,5/0,91
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48

CONSERVATORS



UDD 200 SCEBN

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	180/132
Gross/Net Weight (kg)	59/51
Dimensions WxDxH (mm)	
Internal	600x510x734/607
External	740x650x824/697
With Packing	820x760x885
Loadability (pcs)	
20ft Dc	42
40ft Dc	84
80 m³ Truck	
Shelves/Baskets (pcs)	1
Input Power (W)	93
Energy Cons. (kWh/24h)	1,01/
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48

UDD 300 SCEBN

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	280/209
Gross/Net Weight (kg)	76/62
Dimensions WxDxH (mm)	
Internal	890x510x734/607
External	1030x650x824/697
With Packing	1110x760x885
Loadability (pcs)	
20ft Dc	28
40ft Dc	64
80 m³ Truck	108
Shelves/Baskets (pcs)	1
Input Power (W)	243/150
Energy Cons. (kWh/24h)	2,8/1,59
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 400 SCEBN

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	380/286
Gross/Net Weight (kg)	87/72
Dimensions WxDxH (mm)	
Internal	1180x510x734/607
External	1320x650x824/697
With Packing	1410x760x885
Loadability (pcs)	
20ft Dc	24
40ft Dc	50
80 m³ Truck	84
Shelves/Baskets (pcs)	2
Input Power (W)	300/140
Energy Cons. (kWh/24h)	4,76/2,48
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48

CONSERVATORS



UDD 500 SCEBN

Temperature range °C	-18/-23
Climate Class	7
Gross/Net Volume (l)	466/352
Gross/Net Weight (kg)	122/110
Dimensions WxDxH (mm)	
Internal	1430x510x734/607
External	1570x650x824/697
With Packing	1650x760x885
Loadability (pcs)	
20ft Dc	14
40ft Dc	30
80 m³ Truck	72
Shelves/Baskets (pcs)	2
Input Power (W)	400/300
Energy Cons. (kWh/24h)	5,85/3,21
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48


UDD 205 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	210/166
Gross/Net Weight (kg)	58/47
Dimensions WxDxH (mm)	
Internal	600x510x715
External	719x629x950
With Packing	800x750x960
Loadability (pcs)	
20ft Dc	42
40ft Dc	88
80 m³ Truck	162
Shelves/Baskets (pcs)	1
Input Power (W)	98
Energy Cons. (kWh/24h)	1,32
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R600a
Noise Level (dB(A))	48

UDD 305 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	324/258
Gross/Net Weight (kg)	70/56
Dimensions WxDxH (mm)	
Internal	890x510x715
External	1009x629x950
With Packing	1100x750x960
Loadability (pcs)	
20ft Dc	30
40ft Dc	64
80 m³ Truck	108
Shelves/Baskets (pcs)	1
Input Power (W)	292/119
Energy Cons. (kWh/24h)	3,84/1,48
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48

CONSERVATORS

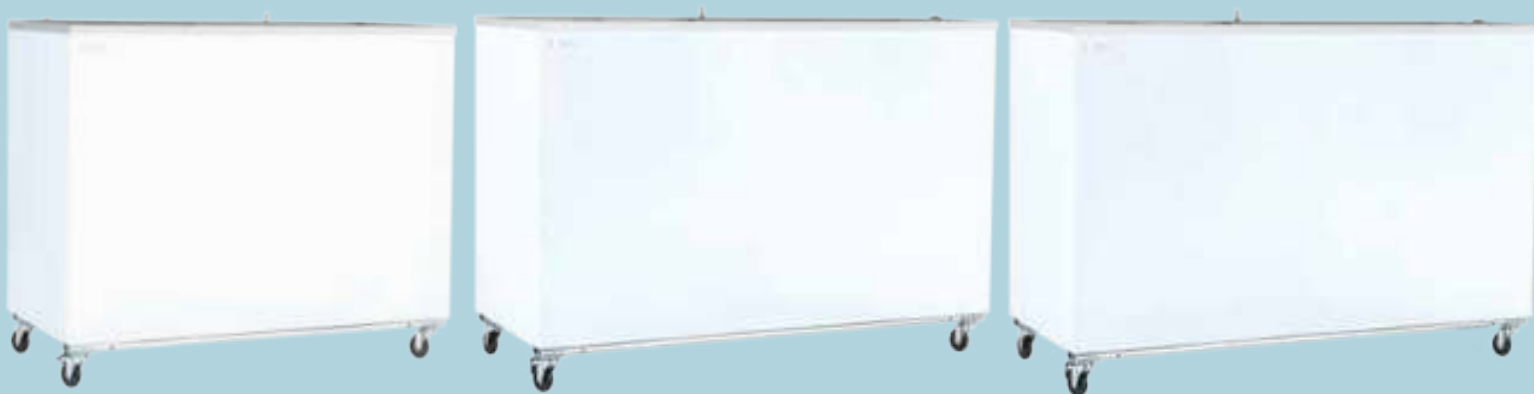

UDD 405 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	438/346
Gross/Net Weight (kg)	80/65
Dimensions WxDxH (mm)	
Internal	1180x510x715
External	1298x629x950
With Packing	1400x750x960
Loadability (pcs)	
20ft Dc	24
40ft Dc	50
80 m³ Truck	84
Shelves/Baskets (pcs)	2
Input Power (W)	254/141
Energy Cons. (kWh/24h)	4,06/1,93
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 505 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	536/432
Gross/Net Weight (kg)	101/85
Dimensions WxDxH (mm)	
Internal	1430x510x715
External	1548x629x950
With Packing	1640x750x960
Loadability (pcs)	
20ft Dc	20
40ft Dc	42
80 m³ Truck	72
Shelves/Baskets (pcs)	2
Input Power (W)	292/191
Energy Cons. (kWh/24h)	3,84/2,39
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

UDD 555 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	615/497
Gross/Net Weight (kg)	114/96
Dimensions WxDxH (mm)	
Internal	1630x510x715
External	1750x629x950
With Packing	1845x750x960
Loadability (pcs)	
20ft Dc	18
40ft Dc	38
80 m³ Truck	63
Shelves/Baskets (pcs)	3
Input Power (W)	330/273
Energy Cons. (kWh/24h)	4,88/3,79
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

CONSERVATORS



UDD 805 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	912/738
Gross/Net Weight (kg)	
Dimensions WxDxH (mm)	
Internal	2380x510x715
External	2500x629x950
With Packing	2535x750x960
Loadability (pcs)	
20ft Dc	12
40ft Dc	24
80 m³ Truck	45
Shelves/Baskets (pcs)	10
Input Power (W)	352
Energy Cons. (kWh/24h)	6,24
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R290
Noise Level (dB(A))	50



UDD 605 SC

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	682/539
Gross/Net Weight (kg)	120/99
Dimensions WxDxH (mm)	
Internal	1930x510x715
External	2055x629x950
With Packing	2150x750x960
Loadability (pcs)	
20ft Dc	16
40ft Dc	32
80 m³ Truck	54
Shelves/Baskets (pcs)	3
Input Power (W)	364/292
Energy Cons. (kWh/24h)	5,24/3,57
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49

CHEST FREEZERS

CHEST FREEZERS



UDD 160 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	122/120
Gross/Net Weight (kg)	39/34
Dimensions WxDxH (mm)	
Internal	440x440x515/755
External	550x595x895
With Packing	635x670x995
Loadability (pcs)	
20ft Dc	54
40ft Dc	108
80 m³ Truck	
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	150
Energy Cons. (kWh/24h)	1,12/0,73
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R134a/R600a
Noise Level (dB(A))	45,1

UDD 260 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	190/183
Gross/Net Weight (kg)	43/39,5
Dimensions WxDxH (mm)	
Internal	610x480x475/725
External	734x695x945
With Packing	820x730x995
Loadability (pcs)	
20ft Dc	42
40ft Dc	88
80 m³ Truck	
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	150
Energy Cons. (kWh/24h)	1,12/0,87
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R134a/R600a
Noise Level (dB(A))	47,5

UDD 360 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	280/270
Gross/Net Weight (kg)	50/46,5
Dimensions WxDxH (mm)	
Internal	860x480x475/725
External	984x695x945
With Packing	1070x730x995
Loadability (pcs)	
20ft Dc	32
40ft Dc	66
80 m³ Truck	
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	185
Energy Cons. (kWh/24h)	1,6/0,8
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R134a/R600a
Noise Level (dB(A))	48

CHEST FREEZERS



UDD 460 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	387/373
Gross/Net Weight (kg)	59/55
Dimensions WxDxH (mm)	
Internal	1160x480x475/725
External	1284x695x945
With Packing	1370x730x995
Loadability (pcs)	
20ft Dc	24
40ft Dc	50
80 m³ Truck	
Shelves/Baskets (pcs) (Optional)	2
Input Power (W)	230
Energy Cons. (kWh/24h)	1,92/1,32
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48,5

UDD 560 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	466/449
Gross/Net Weight (kg)	66/61
Dimensions WxDxH (mm)	
Internal	1380x480x475/725
External	1504x695x945
With Packing	1590x730x995
Loadability (pcs)	
20ft Dc	20
40ft Dc	44
80 m³ Truck	
Shelves/Baskets (pcs) (Optional)	2
Input Power (W)	230
Energy Cons. (kWh/24h)	1,93/1,5
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48,7

UDD 660 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	567/553
Gross/Net Weight (kg)	73/68
Dimensions WxDxH (mm)	
Internal	1680x480x475/725
External	1840x695x945
With Packing	1890x730x995
Loadability (pcs)	
20ft Dc	18
40ft Dc	36
80 m³ Truck	
Shelves/Baskets (pcs) (Optional)	3
Input Power (W)	250
Energy Cons. (kWh/24h)	2,2/1,75
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48,8

CHEST FREEZERS



UDD 200 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	196/150
Gross/Net Weight (kg)	58/47
Dimensions WxDxH (mm)	
Internal	600x510x682
External	720x715x903
With Packing	740x750x905
Loadability (pcs)	
20ft Dc	42
40ft Dc	96
80 m³ Truck	162
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	160/150
Energy Cons. (kWh/24h)	1,92/1,52
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R134a/R600a
Noise Level (dB(A))	47,5

UDD 300 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	296/283
Gross/Net Weight (kg)	68/57
Dimensions WxDxH (mm)	
Internal	890x510x682
External	1012x715x903
With Packing	1040x750x905
Loadability (pcs)	
20ft Dc	30
40ft Dc	68
80 m³ Truck	117
Shelves/Baskets (pcs) (Optional)	2
Input Power (W)	175
Energy Cons. (kWh/24h)	2,3/1,64
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48

UDD 400 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	401/384
Gross/Net Weight (kg)	84/64,5
Dimensions WxDxH (mm)	
Internal	1298x510x682
External	1302x715x903
With Packing	1330x750x905
Loadability (pcs)	
20ft Dc	24
40ft Dc	54
80 m³ Truck	90
Shelves/Baskets (pcs) (Optional)	2
Input Power (W)	385/140
Energy Cons. (kWh/24h)	4,3/1,96
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R600a
Noise Level (dB(A))	48,5

CHEST FREEZERS



UDD 500 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	492/471
Gross/Net Weight (kg)	94/76
Dimensions WxDxH (mm)	
Internal	1430x510x682
External	1552x715x903
With Packing	1585x750x905
Loadability (pcs)	
20ft Dc	20
40ft Dc	44
80 m³ Truck	75
Shelves/Baskets (pcs) (Optional)	2
Input Power (W)	400
Energy Cons. (kWh/24h)	4,6
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A
Noise Level (dB(A))	48,7

UDD 600 BK

Temperature range °C	-18/-23
Climate Class	5
Gross/Net Volume (l)	675/646
Gross/Net Weight (kg)	118.5/97.5
Dimensions WxDxH (mm)	
Internal	1935x510x682
External	2055x715x903
With Packing	2095x750x905
Loadability (pcs)	
20ft Dc	16
40ft Dc	34
80 m³ Truck	57
Shelves/Baskets (pcs) (Optional)	3
Input Power (W)	425
Energy Cons. (kWh/24h)	4,9/3,18
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48,8

ENERGY EFFICIENT CHEST / FREEZERS

ENERGY EFFICIENT CHEST / FREEZERS



UED 280 A++

"Temperature range °C(Freezer-Chiller-Cooler)*	-15/-25
Climate Class	T
Gross/Net Volume (l)	236/227
Gross/Net Weight (kg)	53/51
Dimensions WxDxH (mm)	
Internal	820x440x455/705
External	984x700x895
With Packing	1010x725x890
Loadability (pcs) *with eps	
20ft Dc	34
40ft Dc	70
80 m³ Truck	117
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	40
Energy Cons. (kWh/24h)	0,508
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R600a

UED 280 MOR A++

"Temperature range °C(Freezer-Chiller-Cooler)*	-15/-25
Climate Class	T
Gross/Net Volume (l)	236/227
Gross/Net Weight (kg)	53/51
Dimensions WxDxH (mm)	
Internal	820x440x455/705
External	984x700x895
With Packing	1010x725x890
Loadability (pcs) *with eps	
20ft Dc	34
40ft Dc	70
80 m³ Truck	117
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	40
Energy Cons. (kWh/24h)	0,508
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R600a

UED 280 ANTRASİT A++

"Temperature range °C(Freezer-Chiller-Cooler)*	-15/-25
Climate Class	T
Gross/Net Volume (l)	236/227
Gross/Net Weight (kg)	53/51
Dimensions WxDxH (mm)	
Internal	820x440x455/705
External	984x700x895
With Packing	1010x725x890
Loadability (pcs) *with eps	
20ft Dc	34
40ft Dc	70
80 m³ Truck	117
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	40
Energy Cons. (kWh/24h)	0,508
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R600a

ENERGY EFFICIENT CHEST / FREEZERS



UED 380 A++

"Temperature range °C(Freezer-Chiller-Cooler)"	-15/-25
Climate Class	T
Gross/Net Volume (l)	330/323
Gross/Net Weight (kg)	63/61
Dimensions WxDxH (mm)	
Internal	1120 x 440 x 455 / 705
External	1284 x 700 x 895
With Packing	1310 x 725 x 890
Loadability (pcs) *with eps	
20ft Dc	24
40ft Dc	54
80 m³ Truck	90
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	45
Energy Cons. (kWh/24h)	0,61
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R600a

UED 480 A++

"Temperature range °C(Freezer-Chiller-Cooler)"	-15/-25
Climate Class	T
Gross/Net Volume (l)	402/388
Gross/Net Weight (kg)	71/68
Dimensions WxDxH (mm)	
Internal	1340 x 440 x 455 / 705
External	1504 x 700 x 895
With Packing	1530 x 725 x 890
Loadability (pcs) *with eps	
20ft Dc	22
40ft Dc	46
80 m³ Truck	78
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	50
Energy Cons. (kWh/24h)	0,685
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R600a

UED 150 A++

"Temperature range °C(Freezer-Chiller-Cooler)"	0,6
Climate Class	T
Gross/Net Volume (l)	130/126
Gross/Net Weight (kg)	48.5/44.5
Dimensions WxDxH (mm)	
Internal	530 x 400 x 452 / 702
External	734 x 700 x 895
With Packing	760 x 705 x 890
Loadability (pcs) *with eps	
20ft Dc	42
40ft Dc	102
80 m³ Truck	
Shelves/Baskets (pcs) (Optional)	1
Input Power (W)	35
Energy Cons. (kWh/24h)	0,394
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R600a

ENERGY EFFICIENT UPRIGHT FREEZERS

ENERGY EFFICIENT UPRIGHT FREEZERS



UED 7265 DTK A+

"Temperature range °C (Freezer-Chiller-Cooler)* -18/-25	
Climate Class	T
Gross/Net Volume (l)	265/250
Gross/Net Weight (kg)	72/60
Dimensions WxDxH (mm)	
Internal	432x451x1532
External	595x655x1765
With Packing	680x705x1830
Loadability (pcs) *with eps	
20ft Dc	24
40ft Dc	51
80 m³ Truck	60
Shelves/Baskets (pcs) (Optional)	7
Input Power (W)	48
Energy Cons. (kWh/24h)	0,758
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)z	R600a



UED 7266 DTK A++

"Temperature range °C (Freezer-Chiller-Cooler)* -18/-25	
Climate Class	T
Gross/Net Volume (l)	265/258
Gross/Net Weight (kg)	72/60
Dimensions WxDxH (mm)	
Internal	432x451x1532
External	595x655x1765
With Packing	680x705x1830
Loadability (pcs) *with eps	
20ft Dc	24
40ft Dc	51
80 m³ Truck	60
Shelves/Baskets (pcs) (Optional)	7
Input Power (W)	48
Energy Cons. (kWh/24h)	0,608
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)z	R600a

ENERGY EFFICIENT UPRIGHT FREEZERS



UED 7266 DTK A++ MOR

"Temperature range °C (Freezer-Chiller-Cooler)" -18/-25	
Climate Class	T
Gross/Net Volume (l)	265/258
Gross/Net Weight (kg)	72/60
Dimensions WxDxH (mm)	
Internal	432x451x1532
External	595x655x1765
With Packing	680x705x1830
Loadability (pcs) *with eps	
20ft Dc	24
40ft Dc	51
80 m³ Truck	60
Shelves/Baskets (pcs) (Optional)	7
Input Power (W)	48
Energy Cons. (kWh/24h)	0,608
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)z	R600a



UED 7266 DTK A++ ANTRASİT

"Temperature range °C (Freezer-Chiller-Cooler)" -18/-25	
Climate Class	T
Gross/Net Volume (l)	265/258
Gross/Net Weight (kg)	72/60
Dimensions WxDxH (mm)	
Internal	432x451x1532
External	595x655x1765
With Packing	680x705x1830
Loadability (pcs) *with eps	
20ft Dc	24
40ft Dc	51
80 m³ Truck	60
Shelves/Baskets (pcs) (Optional)	7
Input Power (W)	48
Energy Cons. (kWh/24h)	0,608
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)z	R600a

UPRIGHT FREEZERS

UPRIGHT FREEZERS



UDD 45 DTK

Temperature range °C	-18/-23
Climate Class	3
Gross/Net Volume (l)	46.5/45
Gross/Net Weight (kg)	35.5/31.5
Dimensions WxDxH (mm)	
Internal	460x385x350
External	570x505x485
With Packing	630x570x570
Loadability (pcs)	
20ft Dc	144
40ft Dc	304
80 m³ Truck	336
Shelves/Baskets (pcs)	2
Input Power (W)	150/135
Energy Cons. (kWh/24h)	2,2/1,6
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R134a/R600a
Noise Level (dB(A))	47



UDD 370 DTK

Temperature range °C	-18/-23
Climate Class	4
Gross/Net Volume (l)	300/270
Gross/Net Weight (kg)	101,5/91
Dimensions WxDxH (mm)	
Internal	475x440x1550
External	595x640x1965
With Packing	665x685x2080
Loadability (pcs)	
20ft Dc	24
40ft Dc	51
80 m³ Truck	60
Shelves/Baskets (pcs)	6
Input Power (W)	720/620
Energy Cons. (kWh/24h)	13/8,6
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404/R290
Noise Level (dB(A))	48



UDD 370 DTKL

Temperature range °C	-18/-23
Climate Class	4
Gross/Net Volume (l)	300/270
Gross/Net Weight (kg)	106/96
Dimensions WxDxH (mm)	
Internal	475x440x1550
External	595x600x1965
With Packing	680x685x2100
Loadability (pcs)	
20ft Dc	24
40ft Dc	54
80 m³ Truck	60
Shelves/Baskets (pcs)	6
Input Power (W)	735/635
Energy Cons. (kWh/24h)	13,4/9
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48

UPRIGHT FREEZERS



UDD 370 DTK BK

Temperature range °C	-18/-23
Climate Class	4
Gross/Net Volume (l)	300/270
Gross/Net Weight (kg)	79,5/69,8
Dimensions WxDxH (mm)	
Internal	475x440x1550
External	595x640x1840
With Packing	680x710x1950
Loadability (pcs)	
20ft Dc	24
40ft Dc	51
80 m³ Truck	60
Shelves/Baskets (pcs)	6
Input Power (W)	610/510
Energy Cons. (kWh/24h)	7,2/4,9
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48



UDD 440 DTKL

Temperature range °C	-18/-23
Climate Class	4
Gross/Net Volume (l)	480/353
Gross/Net Weight (kg)	123/114
Dimensions WxDxH (mm)	
Internal	577x495x1684
External	680x655x2090
With Packing	760x710x2207
Loadability (pcs)	
20ft Dc	24
40ft Dc	51
80 m³ Truck	57
Shelves/Baskets (pcs)	6
Input Power (W)	867
Energy Cons. (kWh/24h)	15,28/11,91
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48



UDD 440 DTKLB

Temperature range °C	-18/-23
Climate Class	4
Gross/Net Volume (l)	487/353
Gross/Net Weight (kg)	120/109
Dimensions WxDxH (mm)	
Internal	577x495x1684
External	680x655x2090
With Packing	760x710x2207
Loadability (pcs)	
20ft Dc	24
40ft Dc	51
80 m³ Truck	57
Shelves/Baskets (pcs)	6
Input Power (W)	867
Energy Cons. (kWh/24h)	15,28/11,91
Type of cooling	Mechanical
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	48

UPRIGHT FREEZERS



UDD 440 DTKL NF

Temperature range °C	-18/-23
Climate Class	3
Gross/Net Volume (l)	539/358
Gross/Net Weight (kg)	170/157
Dimensions WxDxH (mm)	
Internal	560x570x1460
External	680x760x2149
With Packing	745x805x2275
Loadability (pcs)	
20ft Dc	21
40ft Dc	42
80 m³ Truck	54
Shelves/Baskets (pcs)	5
Input Power (W)	825/610
Energy Cons. (kWh/24h)	7,68/6,92
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R404A/R290
Noise Level (dB(A))	49



UDD 1600 D3KL NF

Temperature range °C	-18/-23
Climate Class	3
Gross/Net Volume (l)	1252/891
Gross/Net Weight (kg)	333/308
Dimensions WxDxH (mm)	
Internal	1480x568x1518
External	1600x762x2073
With Packing	1675x805x2014
Loadability (pcs)	
20ft Dc	7
40ft Dc	14
80 m³ Truck	24
Shelves/Baskets (pcs)	15
Input Power (W)	1555
Energy Cons. (kWh/24h)	19,58
Type of cooling	Electronic
Power Supply (V/Hz)	230/50
Refrigerant (Std/opt)	R290
Noise Level (dB(A))	49

CHEST BOTTLE COOLERS

CHEST BOTTLE COOLERS



USS 100 SCE

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	100/85
Gross/Net Weight (kg)	49/41
Dimensions (WxDxH) (mm)	
Internal	450x450x490/385
External	568x568x897/777
With Packing	685x650x980
Loadability (pc)	
20ft DC	48
40ft DC	108
80 m³ Truck	120
Shelves/Baskets (pcs)	2
Capacity	
Input Power (W)	240/122
Energy Cons. (kWh/24h)	2,5/1,1
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	44,5



USS 300 SC

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	296/255
Gross/Net Weight (kg)	70/56
Dimensions (WxDxH) (mm)	
Internal	890x510x663
External	1009x629x892
With Packing	1100x750x950
Loadability (pc)	
20ft DC	30
40ft DC	64
80 m³ Truck	72
Shelves/Baskets (pcs)	2
Capacity	
Input Power (W)	340
Energy Cons. (kWh/24h)	3
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a
Noise Level (dB(A))	47

CHEST BOTTLE COOLERS



USS 300 BY2K

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	290/283
Gross/Net Weight (kg)	67/59
Dimensions (WxDxH) (mm)	
Internal	890x510x682
External	1056x665x895
With Packing	1100x750x950
Loadability (pc)	
20ft DC	30
40ft DC	64
80 m³ Truck	72
Shelves/Baskets (pcs)	
Capacity	
Input Power (W)	340
Energy Cons. (kWh/24h)	3
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a
Noise Level (dB(A))	48



USS 300 BK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	290/283
Gross/Net Weight (kg)	67/59
Dimensions (WxDxH) (mm)	
Internal	890x510x682
External	1056x665x895
With Packing	1100x750x950
Loadability (pc)	
20ft DC	30
40ft DC	64
80 m³ Truck	72
Shelves/Baskets (pcs)	
Capacity	
Input Power (W)	340/105
Energy Cons. (kWh/24h)	3/1,75
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48

COUNTER TOP BOTTLE COOLERS

COUNTER TOP BOTTLE COOLERS



USS 15 DTKL

Temperature Range °C	+2/+12
Climate Class	4
Gross/Net Volume (lt)	18/17,2
Gross/Net Weight (kg)	20,5/19
Dimensions (WxDxH) (mm)	
Internal	230x250x302
External	295x366x573
With Packing	372x416x650
Loadability (pc)	
20ft DC	252
40ft DC	504
80 m³ Truck	672
Shelves/Baskets (pcs)	1
Capacity	
Input Power (W)	150
Energy Cons. (kWh/24h)	0,78
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a
Noise Level (dB(A))	48



USS 60 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	57/45
Gross/Net Weight (kg)	37/32,5
Dimensions (WxDxH) (mm)	
Internal	398x320x442
External	455x475x715
With Packing	530x540x840
Loadability (pc)	
20ft DC	88
40ft DC	176
80 m³ Truck	300
Shelves/Baskets (pcs)	2
Capacity	
Input Power (W)	215
Energy Cons. (kWh/24h)	3,4/2,85
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48



USS 95 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	85/55
Gross/Net Weight (kg)	43/37,5
Dimensions (WxDxH) (mm)	
Internal	410x380x550
External	480x520x840
With Packing	560x600x960
Loadability (pc)	
20ft DC	72
40ft DC	160
80 m³ Truck	184
Shelves/Baskets (pcs)	2
Capacity	
Input Power (W)	215
Energy Cons. (kWh/24h)	4,5/3,1
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48

COUNTER TOP BOTTLE COOLERS



USS 100 DSCL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	100/60
Gross/Net Weight (kg)	51/45,5
Dimensions (WxDxH) (mm)	
Internal	560x260x632
External	650x405x940
With Packing	740x460x1050
Loadability (pc)	
20ft DC	76
40ft DC	160
80 m³ Truck	180
Shelves/Baskets (pcs)	3
Capacity	
Input Power (W)	230/225
Energy Cons. (kWh/24h)	4,6/
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48



USS 160 DTK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	141/133
Gross/Net Weight (kg)	52/42
Dimensions (WxDxH) (mm)	
Internal	516x414x768
External	595x516x870
With Packing	650x565x1020
Loadability (pc)	
20ft DC	72
40ft DC	144
80 m³ Truck	144
Shelves/Baskets (pcs)	2
Capacity	
Input Power (W)	250
Energy Cons. (kWh/24h)	2/1,68
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	49

CAN COOLERS

OPEN TOP

COOLERS

CAN COOLERS OPEN TOP COOLERS



UMD 65 KS

Temperature Range °C	+2/+12
Climate Class	3
Gross/Net Volume (lt)	65/57
Gross/Net Weight (kg)	34/32
Dimensions (WxDxH) (mm)	
Internal	Ø470
External	Ø570x998
With Packing	605x605x1000
Loadability (pc)	
20ft DC	51
40ft DC	111
80 m³ Truck	123
Capacity	
Input Power (W)	140
Energy Cons. (kWh/24h)	2,6
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a
Noise Level (dB(A))	42,5



UMD 110 KS

Temperature Range °C	+2/+12
Climate Class	3
Gross/Net Volume (lt)	110/103
Gross/Net Weight (kg)	40,5/30,5
Dimensions (WxDxH) (mm)	
Internal	520x320x570
External	660x460x970
With Packing	690x500x1350
Loadability (pc)	
20ft DC	64
40ft DC	128
80 m³ Truck	144
Capacity	
Input Power (W)	140/160
Energy Cons. (kWh/24h)	2,6/2,5
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	42,5

SINGLE-DOUBLE DOOR BOTTLE COOLERS

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 175 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	171/145
Gross/Net Weight (kg)	70/64
Dimensions (WxDxH) (mm)	
Internal	357x362x1410
External	435x460x2013
With Packing	465x545x2050
Loadability (pc)	
20ft DC	44
40ft DC	96
80 m³ Truck	108
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	200
Pet Bottle (500 ml)	116
Input Power (W)	200/140
Energy Cons. (kWh/24h)	3,5/2,81
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	52

USS 220 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	215/190
Gross/Net Weight (kg)	68/61
Dimensions (WxDxH) (mm)	
Internal	505x462x1025
External	595x640x1435
With Packing	665x685x1620
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	3
Capacity	
Can (330 ml)	224
Pet Bottle (500 ml)	154
Input Power (W)	250/310
Energy Cons. (kWh/24h)	3,9/3,02
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

USS 220 DTK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	215/190
Gross/Net Weight (kg)	65/58
Dimensions (WxDxH) (mm)	
Internal	505x462x1025
External	595x640x1310
With Packing	665x685x1480
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	3
Capacity	
Can (330 ml)	224
Pet Bottle (500 ml)	154
Input Power (W)	235/240
Energy Cons. (kWh/24h)	3,5/2,6
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 220 DTK BK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	215/190
Gross/Net Weight (kg)	58/52
Dimensions (WxDxH) (mm)	
Internal	505x462x1025
External	595x640x1310
With Packing	665x685x1480
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	3
Capacity	
Can (330 ml)	224
Pet Bottle (500 ml)	154
Input Power (W)	235/197
Energy Cons. (kWh/24h)	2,7/1,68
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8



USS 275 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	293/238
Gross/Net Weight (kg)	83/76
Dimensions (WxDxH) (mm)	
Internal	420x497x1408
External	500x640x1980
With Packing	570x685x2080
Loadability (pc)	
20ft DC	32
40ft DC	68
80 m³ Truck	79
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	270/270
Energy Cons. (kWh/24h)	3,5/3,2
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8



USS 300 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	290/260
Gross/Net Weight (kg)	80/74
Dimensions (WxDxH) (mm)	
Internal	505x462x1350
External	595x640x1780
With Packing	665x685x1950
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	4
Capacity	
Can (330 ml)	331
Pet Bottle (500 ml)	224
Input Power (W)	300/300
Energy Cons. (kWh/24h)	4,1/3,00
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 300 DTK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	290/260
Gross/Net Weight (kg)	74/68
Dimensions (WxDxH) (mm)	
Internal	505x462x1355
External	595x640x1640
With Packing	665x685x1810
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	4
Capacity	
Can (330 ml)	331
Pet Bottle (500 ml)	224
Input Power (W)	290/275
Energy Cons. (kWh/24h)	3,6/2,64
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8



USS 300 DTK BK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	290/260
Gross/Net Weight (kg)	65/59
Dimensions (WxDxH) (mm)	
Internal	505x462x1355
External	595x640x1640
With Packing	665x685x1810
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	4
Capacity	
Can (330 ml)	331
Pet Bottle (500 ml)	224
Input Power (W)	290/201
Energy Cons. (kWh/24h)	2,9/1,7
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8



USS 374 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	90/80,4
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x604x1980
With Packing	665x685x2150
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	399
Pet Bottle (500 ml)	259
Input Power (W)	370/325
Energy Cons. (kWh/24h)	5,2/3,8
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 374 D2KL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	86/79
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x604x1980
With Packing	665x685x2130
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	399
Pet Bottle (500 ml)	259
Input Power (W)	370/325
Energy Cons. (kWh/24h)	5,2/3,8
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8



USS 374 DTKLB

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	380/345
Gross/Net Weight (kg)	90/83
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x625x1980
With Packing	665x685x2080
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	476
Pet Bottle (500 ml)	308
Input Power (W)	370/325
Energy Cons. (kWh/24h)	4,9/3,8
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8



USS 374 DTKLE

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	85/78
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x640x1980
With Packing	665x685x2150
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	399
Pet Bottle (500 ml)	259
Input Power (W)	370/325
Energy Cons. (kWh/24h)	5,2/3,8
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 374 DTK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	81/74
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x640x1840
With Packing	665x685x2010
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	399
Pet Bottle (500 ml)	259
Input Power (W)	350/250
Energy Cons. (kWh/24h)	4,8/2,2
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

USS 374 DTK BK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	70/64
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x640x1840
With Packing	665x685x2010
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	399
Pet Bottle (500 ml)	259
Input Power (W)	350/225
Energy Cons. (kWh/24h)	4,3/1,94
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

USS 380 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	388/372
Gross/Net Weight (kg)	100/92
Dimensions (WxDxH) (mm)	
Internal	505X462X1555
External	595X640X1980
With Packing	666X685X2150
Loadability (pc)	
20ft DC	24
40ft DC	51
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	378
Pet Bottle (500 ml)	186
Input Power (W)	450
Energy Cons. (kWh/24h)	3,648
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	48

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 420 DTK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	420/263
Gross/Net Weight (kg)	108,5/98
Dimensions (WxDxH) (mm)	
Internal	518x499x1630
External	595x680x2038
With Packing	610x680x2170
Loadability (pc)	
20ft DC	27
40ft DC	57
80 m³ Truck	66
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	385
Pet Bottle (500 ml)	210
Input Power (W)	250
Energy Cons. (kWh/24h)	2,6
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R600a
Noise Level (dB(A))	48



USS 440 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	439/299
Gross/Net Weight (kg)	112/101
Dimensions (WxDxH) (mm)	
Internal	585x495x1515
External	680x655x2090
With Packing	760x705x2230
Loadability (pc)	
20ft DC	24
40ft DC	51
80 m³ Truck	57
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	504
Pet Bottle (500 ml)	376
Input Power (W)	390/350
Energy Cons. (kWh/24h)	5,7/5,45
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	51,6



USS 440 DTKLB

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	477/346
Gross/Net Weight (kg)	111/100
Dimensions (WxDxH) (mm)	
Internal	585x495x1515
External	680x660x2090
With Packing	760x705x2230
Loadability (pc)	
20ft DC	24
40ft DC	51
80 m³ Truck	57
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	504
Pet Bottle (500 ml)	376
Input Power (W)	390/350
Energy Cons. (kWh/24h)	5,7/4,15
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	51,6

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 500 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	485/350
Gross/Net Weight (kg)	124/115
Dimensions (WxDxH) (mm)	
Internal	577x500x1684
External	680x655x2090
With Packing	760x705x2207
Loadability (pc)	
20ft DC	24
40ft DC	51
80 m³ Truck	57
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	504
Pet Bottle (500 ml)	376
Input Power (W)	550/500
Energy Cons. (kWh/24h)	6,5/5,9
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	51,6

USS 690 DTKL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	657/629
Gross/Net Weight (kg)	136/123
Dimensions (WxDxH) (mm)	
Internal	695x560x1690
External	780x700x2127
With Packing	850x755x2260
Loadability (pc)	
20ft DC	18
40ft DC	42
80 m³ Truck	47
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	700
Pet Bottle (500 ml)	350
Input Power (W)	381
Energy Cons. (kWh/24h)	5,9/5,11
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R290
Noise Level (dB(A))	51,6

USS 700 DTK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	683/578
Gross/Net Weight (kg)	151/140,5
Dimensions (WxDxH) (mm)	
Internal	702x560x1791
External	780x705x2202
With Packing	795x710x2320
Loadability (pc)	
20ft DC	21
40ft DC	45
80 m³ Truck	57
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	700
Pet Bottle (500 ml)	350
Input Power (W)	425
Energy Cons. (kWh/24h)	5,11
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	55

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 748 D2KL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	744/690
Gross/Net Weight (kg)	166/154
Dimensions (WxDxH) (mm)	
Internal	1010x462x1555
External	1200x640x1980
With Packing	1270x720x2080
Loadability (pc)	
20ft DC	13
40ft DC	27
80 m³ Truck	31
Shelves/Baskets (pcs)	2x5
Capacity	
Can (330 ml)	399x2
Pet Bottle (500 ml)	259x2
Input Power (W)	730/650
Energy Cons. (kWh/24h)	9,8/7,6
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8



USS 810 DTK

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	718/554
Gross/Net Weight (kg)	154/143
Dimensions (WxDxH) (mm)	
Internal	734x553x1780
External	810x661x2183
With Packing	825x710x2320
Loadability (pc)	
20ft DC	21
40ft DC	42
80 m³ Truck	48
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	924
Pet Bottle (500 ml)	360
Input Power (W)	421
Energy Cons. (kWh/24h)	4,43
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	57



USS 890 D2K

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	813/573
Gross/Net Weight (kg)	174/160
Dimensions (WxDxH) (mm)	
Internal	810x649x1556
External	890x769x2004
With Packing	950x840x2140
Loadability (pc)	
20ft DC	12
40ft DC	28
80 m³ Truck	32
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	960
Pet Bottle (500 ml)	480
Input Power (W)	554
Energy Cons. (kWh/24h)	6,24
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	49

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 900 DSCL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	810/780
Gross/Net Weight (kg)	
Dimensions (WxDxH) (mm)	
Internal	820 x 574 x 1421
External	900 x 742 x 2102
With Packing	960 x 790 x 2260
Loadability (pc)	
20ft DC	12
40ft DC	28
80 m³ Truck	32
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	1016
Pet Bottle (500 ml)	680
Input Power (W)	1000
Energy Cons. (kWh/24h)	8,8
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	55,4



USS 1100 DSCL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	988,5/768
Gross/Net Weight (kg)	186/171
Dimensions (WxDxH) (mm)	
Internal	1000x652x1533
External	1110x820x2010
With Packing	1150x870x2160
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	30
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	1190
Pet Bottle (500 ml)	833
Input Power (W)	850
Energy Cons. (kWh/24h)	10,8/
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R290
Noise Level (dB(A))	55,4



USS 1000 DSCL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	771/524
Gross/Net Weight (kg)	160/150
Dimensions (WxDxH) (mm)	
Internal	890x572x1533
External	1000x742x2000
With Packing	1060x790x2160
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	38
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	910
Pet Bottle (500 ml)	546
Input Power (W)	700/730
Energy Cons. (kWh/24h)	8,9/7,8
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R290
Noise Level (dB(A))	55,4

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 1200 DSCL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	945/645
Gross/Net Weight (kg)	178/164
Dimensions (WxDxH) (mm)	
Internal	1090x572x1533
External	1200x742x2000
With Packing	1260x790x2160
Loadability (pc)	
20ft DC	11
40ft DC	24
80 m³ Truck	31
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	1120
Pet Bottle (500 ml)	672
Input Power (W)	850/1000
Energy Cons. (kWh/24h)	10,7/9,5
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R290
Noise Level (dB(A))	55,4



USS 1000 D2KL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	881/645
Gross/Net Weight (kg)	169/158
Dimensions (WxDxH) (mm)	
Internal	890x670x1533
External	1000x792x2000
With Packing	1060x840x2160
Loadability (pc)	
20ft DC	14
40ft DC	28
80 m³ Truck	32
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	910
Pet Bottle (500 ml)	546
Input Power (W)	700/890
Energy Cons. (kWh/24h)	8,9/7,8
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R290
Noise Level (dB(A))	55,4

SINGLE-DOUBLE DOOR BOTTLE COOLERS



USS 1600 D2KL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	1247/891
Gross/Net Weight (kg)	262/238
Dimensions (WxDxH) (mm)	
Internal	1480x568x1518
External	1600x750x2073
With Packing	1675x805x2124
Loadability (pc)	
20ft DC	7
40ft DC	14
80 m³ Truck	24
Shelves/Baskets (pcs)	15
Capacity	
Can (330 ml)	1386
Pet Bottle (500 ml)	734
Input Power (W)	775
Energy Cons. (kWh/24h)	6,6
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	49



USS 1600 D3KL

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	1247/891
Gross/Net Weight (kg)	262/238
Dimensions (WxDxH) (mm)	
Internal	1480x568x1518
External	1600x750x2073
With Packing	1675x805x2124
Loadability (pc)	
20ft DC	7
40ft DC	14
80 m³ Truck	24
Shelves/Baskets (pcs)	15
Capacity	
Can (330 ml)	1386
Pet Bottle (500 ml)	734
Input Power (W)	775
Energy Cons. (kWh/24h)	6,6
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	49

PREMIUM COOLERS

PREMIUM COOLERS



USS 95 DTK Premium

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	85/55
Gross/Net Weight (kg)	50/40
Dimensions (WxDxH) (mm)	
Internal	410x380x550
External	482x516x895
With Packing	585x595x1055
Loadability (pc)	
20ft DC	72
40ft DC	160
80 m³ Truck	184
Shelves/Baskets (pcs)	2
Capacity	
Can (330 ml)	75
Pet Bottle (500 ml)	65
Input Power (W)	215
Energy Cons. (kWh/24h)	4,5/1,5
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	44,2



USS 175 DTK Premium

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	171/145
Gross/Net Weight (kg)	70/64,5
Dimensions (WxDxH) (mm)	
Internal	357x362x1410
External	435x475x1910
With Packing	505x630x1960
Loadability (pc)	
20ft DC	36
40ft DC	75
80 m³ Truck	84
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	180
Pet Bottle (500 ml)	100
Input Power (W)	180
Energy Cons. (kWh/24h)	3,16
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R600a
Noise Level (dB(A))	49



USS 220 DTK Premium

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	215/190
Gross/Net Weight (kg)	71/64
Dimensions (WxDxH) (mm)	
Internal	505x462x1020
External	595x662x1426
With Packing	665x685x1500
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	3
Capacity	
Can (330 ml)	224
Pet Bottle (500 ml)	154
Input Power (W)	235/240
Energy Cons. (kWh/24h)	3,3/2,6
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48

PREMIUM COOLERS



USS 275 DTK Premium

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	295/242
Gross/Net Weight (kg)	97/85
Dimensions (WxDxH) (mm)	
Internal	424x498x1408
External	587x591x1833
With Packing	640x640x1970
Loadability (pc)	
20ft DC	27
40ft DC	54
80 m³ Truck	63
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	250/225
Energy Cons. (kWh/24h)	3,05/1,9
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48



USS 275 DTKL Premium

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	293/238
Gross/Net Weight (kg)	97/85
Dimensions (WxDxH) (mm)	
Internal	420x497x1408
External	500x600x2045
With Packing	570x685x2110
Loadability (pc)	
20ft DC	32
40ft DC	68
80 m³ Truck	76
Shelves/Baskets (pcs)	4
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	270/270
Energy Cons. (kWh/24h)	3,5/3,2
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48



USS 300 DTK Premium

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	290/260
Gross/Net Weight (kg)	88/80
Dimensions (WxDxH) (mm)	
Internal	500x445x1355
External	595x665x1720
With Packing	665x685x1820
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	4
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	290/290
Energy Cons. (kWh/24h)	3,6/3,6
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48

PREMIUM COOLERS



USS 374 DTK Premium

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	96/88
Dimensions (WxDxH) (mm)	
Internal	500x445x1553
External	595x665x1920
With Packing	665x700x2020
Loadability (pc)	
20ft DC	27
40ft DC	54
80 m³ Truck	
Shelves/Baskets (pcs)	4
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	350/350
Energy Cons. (kWh/24h)	4,8/2,2
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48



USS 374 DTK Lean

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	74,5/69
Dimensions (WxDxH) (mm)	
Internal	525x465x1555
External	595x640x1840
With Packing	665x685x2010
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	30
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	399
Pet Bottle (500 ml)	259
Input Power (W)	350/250
Energy Cons. (kWh/24h)	4,8/2,2
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	48



USS 690 DTKL LCD

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	657/629
Gross/Net Weight (kg)	136/123
Dimensions (WxDxH) (mm)	
Internal	702x555x1682
External	780x705x2080
With Packing	855x780x2310
Loadability (pc)	
20ft DC	18
40ft DC	42
80 m³ Truck	48
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	700
Pet Bottle (500 ml)	350
Input Power (W)	485/650
Energy Cons. (kWh/24h)	8/7,1
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	52

PREMIUM COOLERS



USS 700 DTKL Premium

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	666/577
Gross/Net Weight (kg)	140/132
Dimensions (WxDxH) (mm)	
Internal	681x555x1790
External	780x755x2130
With Packing	800x770x2210
Loadability (pc)	
20ft DC	18
40ft DC	42
80 m³ Truck	48
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	930
Pet Bottle (500 ml)	444
Input Power (W)	427
Energy Cons. (kWh/24h)	5,9
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	52

USS 95 DTK*

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	85/55
Gross/Net Weight (kg)	43/37,5
Dimensions (WxDxH) (mm)	
Internal	410x380x550
External	480x506x840
With Packing	560x590x960
Loadability (pc)	
20ft DC	80
40ft DC	160
80 m³ Truck	184
Shelves/Baskets (pcs)	2
Capacity	
Can (330 ml)	75
Pet Bottle (500 ml)	65
Input Power (W)	215
Energy Cons. (kWh/24h)	4,5/1,5
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	44,2

*FRAMELESS DESIGN

USS 374 DTKL*

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	99/
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x604x1980
With Packing	665x685x2150
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	399
Pet Bottle (500 ml)	259
Input Power (W)	325
Energy Cons. (kWh/24h)	4,8/3,2
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

*FRAMELESS DESIGN

PREMIUM COOLERS



USS 1200 D2KL*

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	1055/1048
Gross/Net Weight (kg)	201/
Dimensions (WxDxH) (mm)	
Internal	1091x677x1573
External	1200x770x2030
With Packing	1260x840x2140
Loadability (pc)	
20ft DC	11
40ft DC	23
80 m³ Truck	26
Shelves/Baskets (pcs)	4
Capacity	
Can (330 ml)	1120
Pet Bottle (500 ml)	672
Input Power (W)	890
Energy Cons. (kWh/24h)	5,1
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	55,4
*FRAMELESS DESIGN	



USS 1500 D3KL*

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	1208/1148
Gross/Net Weight (kg)	223/
Dimensions (WxDxH) (mm)	
Internal	1390x577x1522
External	1500x712x2044
With Packing	1565x750x2060
Loadability (pc)	
20ft DC	10
40ft DC	23
80 m³ Truck	26
Shelves/Baskets (pcs)	12
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	1200
Energy Cons. (kWh/24h)	5,2
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	63
*FRAMELESS DESIGN	

SUB-ZERO BOTTLE COOLERS

SUB-ZERO BOTTLE COOLERS



USS 95 DTKL SZ

Temperature Range °C	-2,5/+1
Climate Class	4
Gross/Net Volume (lt)	85/55
Gross/Net Weight (kg)	43/37,5
Dimensions (WxDxH) (mm)	
Internal	410x380x550
External	480 x520x840
With Packing	580x600x960
Loadability (pc)	
20ft DC	72
40ft DC	160
80 m³ Truck	184
Shelves/Baskets (pcs)	2
Capacity	
Can (330 ml)	75
Pet Bottle (500 ml)	65
Input Power (W)	215
Energy Cons. (kWh/24h)	4,5/1,5
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	44,2



USS 374 DTKL SZ

Temperature Range °C	-2,5/+1
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	90/80
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x640x1980
With Packing	665x685x2080
Loadability (pc)	
20ft DC	27
40ft DC	57
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	399
Pet Bottle (500 ml)	259
Input Power (W)	550
Energy Cons. (kWh/24h)	7,7
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

SUB-ZERO BOTTLE COOLERS



USS 374 DTKL SZ BK

Temperature Range °C	-2,5/+1
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	85/75,5
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x640x1980
With Packing	665x685x2080
Loadability (pc)	
20ft DC	27
40ft DC	57
80 m³ Truck	60
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	399
Pet Bottle (500 ml)	259
Input Power (W)	330
Energy Cons. (kWh/24h)	4,8
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

USS 440 DTKL SZ

Temperature Range °C	-2,5/+1
Climate Class	4
Gross/Net Volume (lt)	412/347
Gross/Net Weight (kg)	122/111
Dimensions (WxDxH) (mm)	
Internal	580x495x1515
External	680x655x2090
With Packing	760x705x2207
Loadability (pc)	
20ft DC	24
40ft DC	51
80 m³ Truck	57
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	504
Pet Bottle (500 ml)	376
Input Power (W)	550
Energy Cons. (kWh/24h)	7,9
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	51,6

USS 440 DTKL SZ BK

Temperature Range °C	-2,5/+1
Climate Class	4
Gross/Net Volume (lt)	412/347
Gross/Net Weight (kg)	135/125
Dimensions (WxDxH) (mm)	
Internal	580x495x1515
External	680x655x2090
With Packing	760x705x2207
Loadability (pc)	
20ft DC	24
40ft DC	51
80 m³ Truck	57
Shelves/Baskets (pcs)	5
Capacity	
Can (330 ml)	504
Pet Bottle (500 ml)	376
Input Power (W)	390
Energy Cons. (kWh/24h)	4,5
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	51,6

WINE COOLERS

WINE COOLERS



USS 374 DTKB SRP

Temperature Range °C	+10/+18
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	83,4/74
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x640x1840
With Packing	665x685x1940
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs) (optional)	5
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	270/300
Energy Cons. (kWh/24h)	2,5/1,93
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8




USS 374 DTK SRP

Temperature Range °C	+10/+18
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	83,4/74
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x640x1840
With Packing	665x685x1940
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs) (optional)	5
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	270/300
Energy Cons. (kWh/24h)	2,5/1,93
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8



USS 374 DTK BK SRP

Temperature Range °C	+10/+18
Climate Class	4
Gross/Net Volume (lt)	372/345
Gross/Net Weight (kg)	74,4/65
Dimensions (WxDxH) (mm)	
Internal	505x462x1555
External	595x640x1840
With Packing	665x685x1940
Loadability (pc)	
20ft DC	24
40ft DC	54
80 m³ Truck	60
Shelves/Baskets (pcs) (optional)	5
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	270/300
Energy Cons. (kWh/24h)	1,76/1,6
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a/R600a
Noise Level (dB(A))	46,8

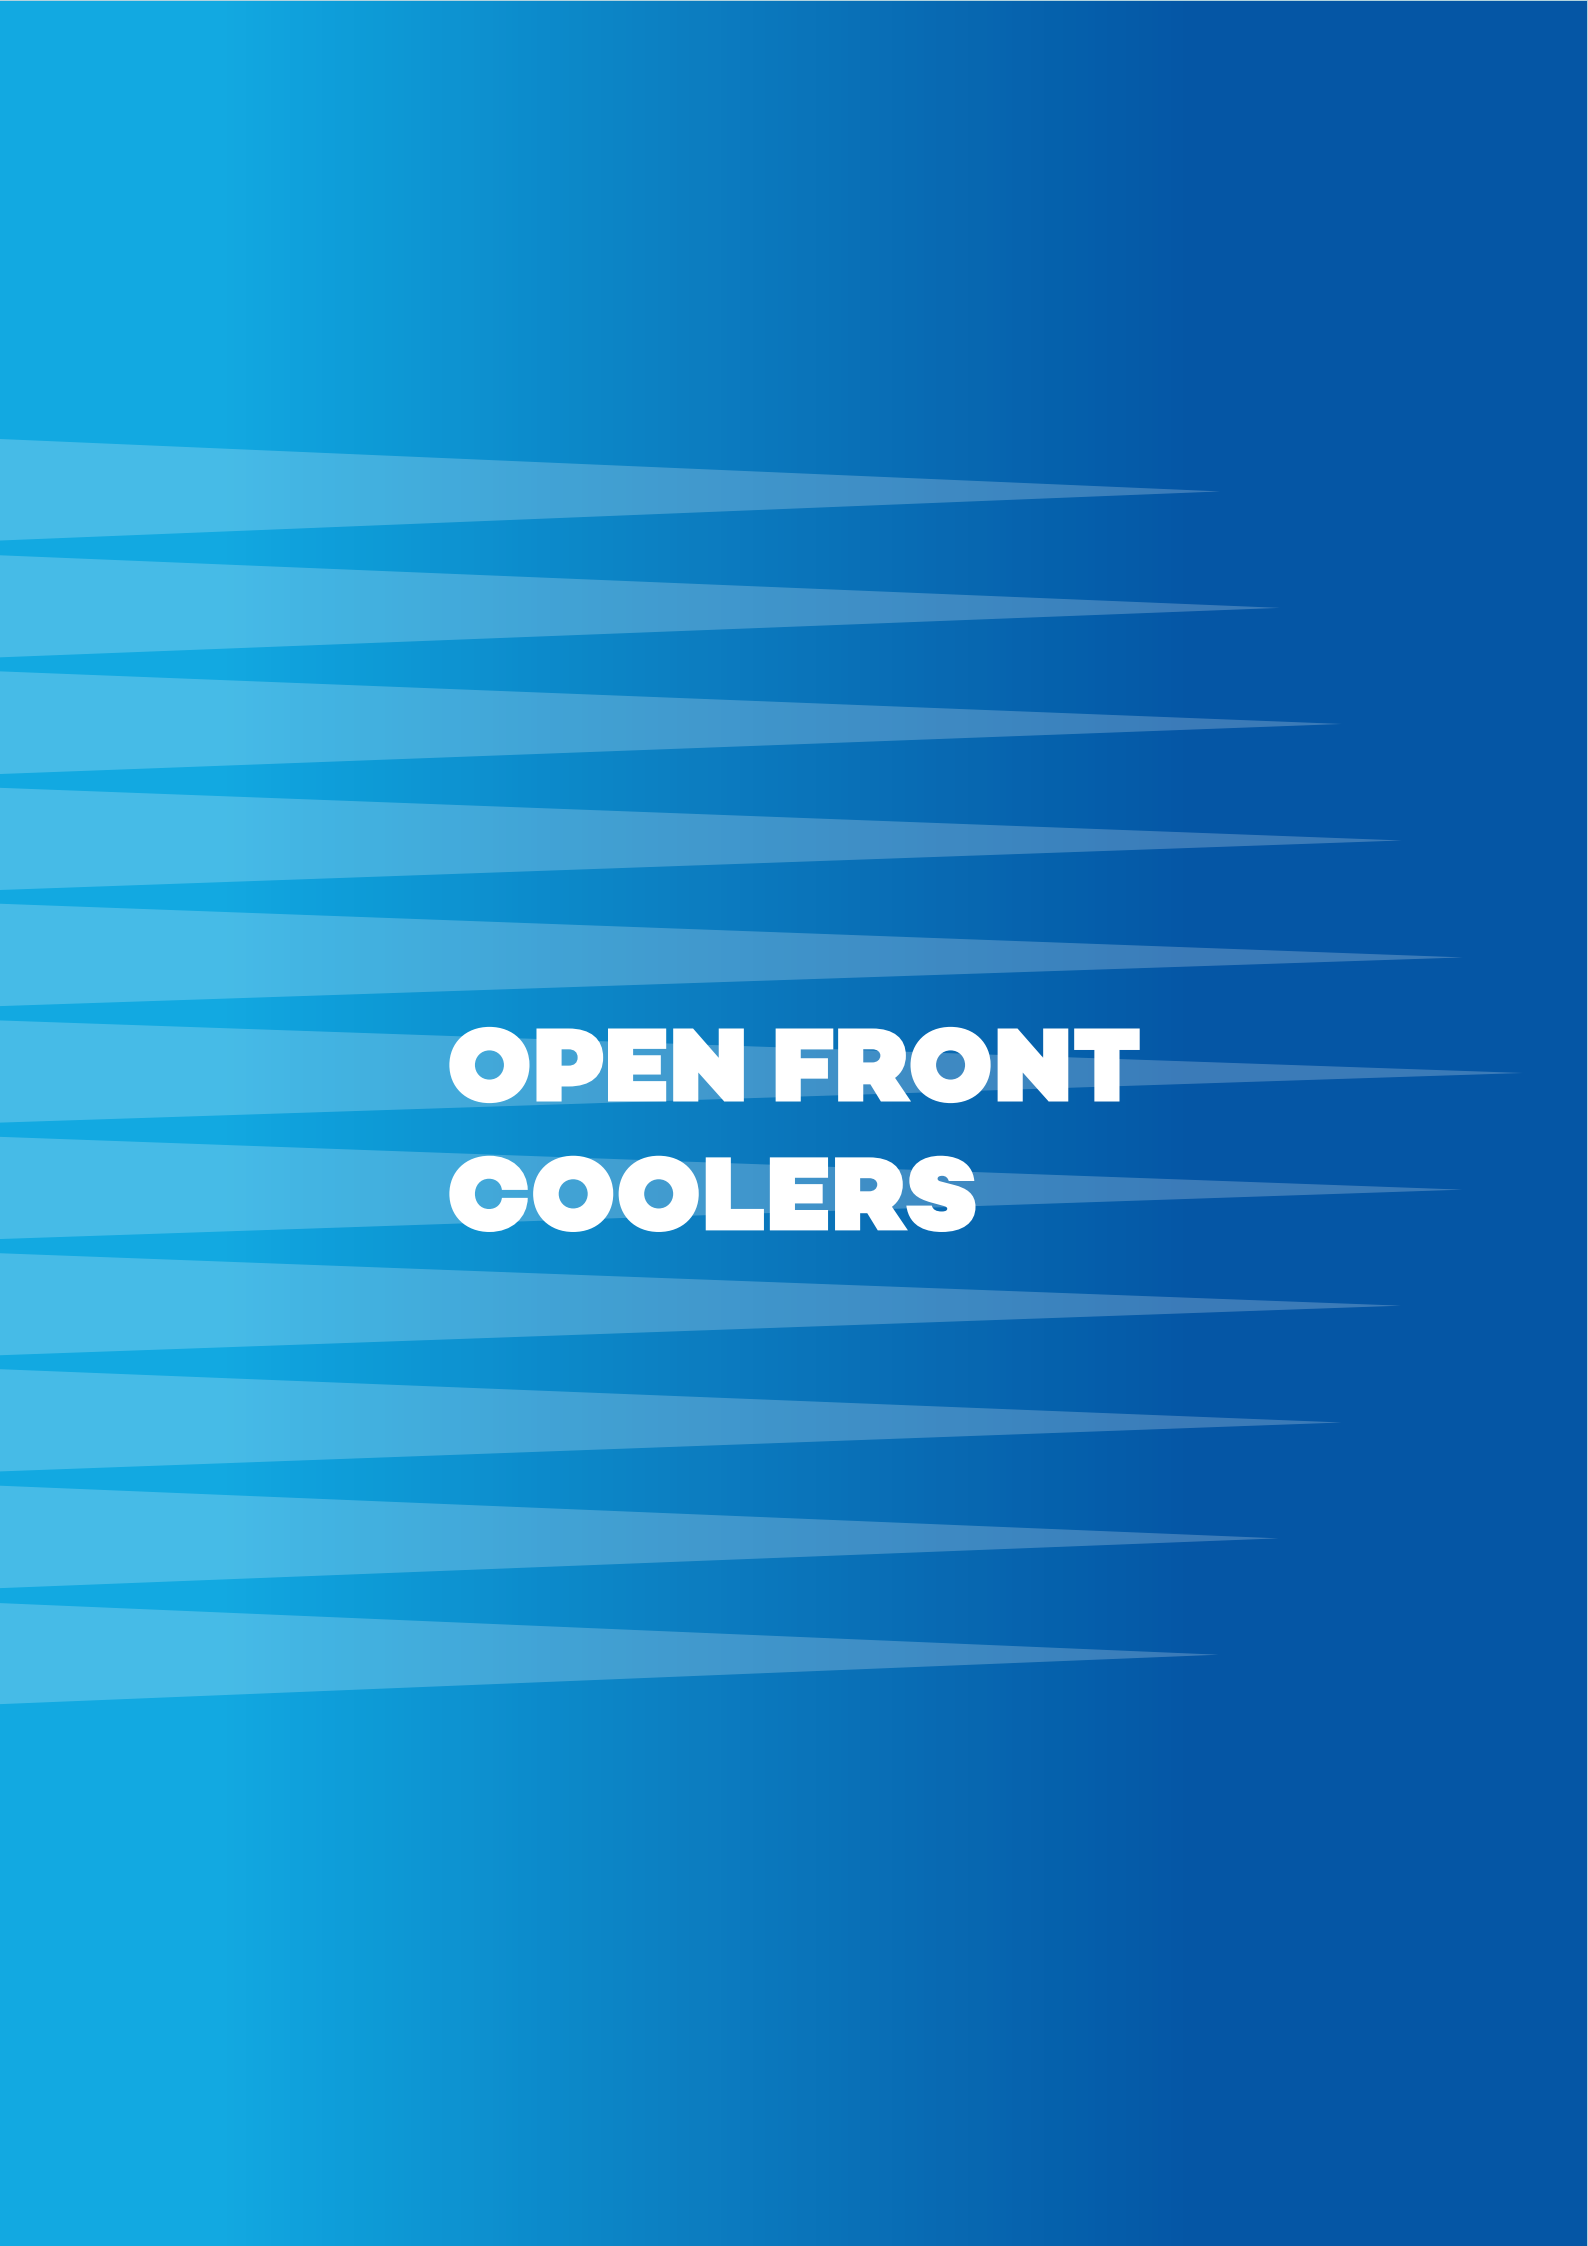

OPEN FRONT COOLERS

OPEN FRONT COOLERS



UMD 670 AS

Temperature Range °C	3
Climate Class	+2/+12
Gross/Net Volume (lt)	670/305
Gross/Net Weight (kg)	225/213
Dimensions (WxDxH) (mm)	
Internal	710x640x1400
External	800x1000x2155
With Packing	890x1050x2213
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	30
Shelves/Baskets (pcs) (optional)	4
Capacity	
Can (330 ml)	600
Pet Bottle (500 ml)	330
Input Power (W)	1450
Energy Cons. (kWh/24h)	20
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R404A
Noise Level (dB(A))	58,5

UMD 1100 AS

Temperature Range °C	3
Climate Class	+2/+12
Gross/Net Volume (lt)	1100/750
Gross/Net Weight (kg)	318/300
Dimensions (WxDxH) (mm)	
Internal	1170x640x1400
External	1260x1070x2262
With Packing	1350x1120x2320
Loadability (pc)	
20ft DC	8
40ft DC	17
80 m³ Truck	20
Shelves/Baskets (pcs) (optional)	4
Capacity	
Can (330 ml)	1020
Pet Bottle (500 ml)	540
Input Power (W)	1670
Energy Cons. (kWh/24h)	29
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R404A
Noise Level (dB(A))	61,5

UMD 290 AS

Temperature Range °C	3
Climate Class	+2/+12
Gross/Net Volume (lt)	294/290
Gross/Net Weight (kg)	84/76,5
Dimensions (WxDxH) (mm)	
Internal	420x457x1190
External	500x565x1830
With Packing	520x640x1860
Loadability (pc)	
20ft DC	36
40ft DC	72
80 m³ Truck	84
Shelves/Baskets (pcs) (optional)	4
Capacity	
Can (330 ml)	
Pet Bottle (500 ml)	
Input Power (W)	700
Energy Cons. (kWh/24h)	8,2
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	58

OPEN FRONT COOLERS



UMD 240 AS

Temperature Range °C	3
Climate Class	-1/+7
Gross/Net Volume (lt)	240/150
Gross/Net Weight (kg)	130/106
Dimensions (WxDxH) (mm)	
Internal	540x433x845
External	580x727x1422
With Packing	785x870x1620
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	45
Shelves/Baskets (pcs) (optional)	3
Capacity	
Can (330 ml)	182
Pet Bottle (500 ml)	140
Input Power (W)	549
Energy Cons. (kWh/24h)	10,853
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	58



UMD 180 AS

Temperature Range °C	3
Climate Class	-1/+5
Gross/Net Volume (lt)	180/80
Gross/Net Weight (kg)	121/89
Dimensions (WxDxH) (mm)	
Internal	540x585x555
External	590x712x1060
With Packing	675x800x1225
Loadability (pc)	
20ft DC	21
40ft DC	44
80 m³ Truck	120
Shelves/Baskets (pcs) (optional)	
Capacity	
Can (330 ml)	105
Pet Bottle (500 ml)	
Input Power (W)	450
Energy Cons. (kWh/24h)	7,29
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS

SUPERMARKET FREEZERS / COOLERS



UMD 1450 D/S DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	"[6,2(for freezer R404A)/4,29(for cooler R404A)] [6,03(for freezer R290)/4,17for cooler R290)]"
Temperature Range °C	[-18/-23][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	588/302
Gross/Net Weight (kg)	N/A
Internal Dimensions (WxDxH) (mm)	1320X720X723
External Dimensions (WxDxH) (mm)	1456X858X723
With PackingDimensions (WxDxH) (mm)	1510X910X1000
Seperator(pcs)	1
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57



UMD 1850 D/S DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	"[8,15(for freezer R404A)/4,82(for cooler R404A)] [7,53(for freezer R290)/4,57for cooler R290)]"
Temperature Range °C	[-18/-23][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/413
Gross/Net Weight (kg)	138/122
Internal Dimensions (WxDxH) (mm)	1720X720X723
External Dimensions (WxDxH) (mm)	1856X858X723
With PackingDimensions (WxDxH) (mm)	1910X910X1000
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 1850 GB D/S DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	"[7,52(for freezer R404A)/4,83(for cooler R404A)] [6,35(for freezer R290)/4,28for cooler R290)]"
Temperature Range °C	[-18/-23][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	713/335
Gross/Net Weight (kg)	138/122
Internal Dimensions (WxDxH) (mm)	1720X720X578
External Dimensions (WxDxH) (mm)	1856X858X816
With PackingDimensions (WxDxH) (mm)	1910X910X1000
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Noise Level (dB(A))	58



UMD 2100 D/S DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	"[9,50(for freezer R404A)/5,93(for cooler R404A)] [8,78(for freezer R290)/5,42for cooler R290)]"
Temperature Range °C	[-18/-23][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	905/483
Gross/Net Weight (kg)	170/152
Internal Dimensions (WxDxH) (mm)	1970X720X723
External Dimensions (WxDxH) (mm)	2106X858X890
With PackingDimensions (WxDxH) (mm)	2106x910x1000
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 2500 D/S DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	"[9,61(for freezer R404A)/6,70(for cooler R404A)] [9,8(for freezer R290)/5,99for cooler R290]]"
Temperature Range °C	[-18/-23][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	1100/594
Gross/Net Weight (kg)	191/172
Internal Dimensions (WxDxH) (mm)	2370X720X723
External Dimensions (WxDxH) (mm)	2500x858x890
With PackingDimensions (WxDxH) (mm)	2560x910x1000
Seperator(pcs)	1
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	20
Noise Level (dB(A))	58



UMD 1450 D DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	6,2/6,03
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	588/377
Gross/Net Weight (kg)	128,5/111,5
Internal Dimensions (WxDxH) (mm)	1320x720x723
External Dimensions (WxDxH) (mm)	1456x858x890
With PackingDimensions (WxDxH) (mm)	1510x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57

SUPERMARKET FREEZERS / COOLERS



UMD 1850 D DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	8,15/7,53
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/511
Gross/Net Weight (kg)	138/122
Internal Dimensions (WxDxH) (mm)	1720x720x723
External Dimensions (WxDxH) (mm)	1856x858x890
With PackingDimensions (WxDxH) (mm)	1910x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Noise Level (dB(A))	58



UMD 1850 GB D DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	7,52/6,35
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/563,8
Gross/Net Weight (kg)	138/122
Internal Dimensions (WxDxH) (mm)	1720x720x650
External Dimensions (WxDxH) (mm)	1856x858x816
With PackingDimensions (WxDxH) (mm)	1910x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 2100 D DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	9,502/8,78
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	905/595
Gross/Net Weight (kg)	170/152
Internal Dimensions (WxDxH) (mm)	1970x720x723
External Dimensions (WxDxH) (mm)	2106x858x890
With PackingDimensions (WxDxH) (mm)	2106x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Noise Level (dB(A))	58



UMD 2500 D DF BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	9,616/9,80
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	1100/729
Gross/Net Weight (kg)	191/172
Internal Dimensions (WxDxH) (mm)	2370x720x723
External Dimensions (WxDxH) (mm)	2500x858x890
With PackingDimensions (WxDxH) (mm)	2560x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	20
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 1450 D BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	5,99/5,708
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	588/419
Gross/Net Weight (kg)	128,5/111,5
Internal Dimensions (WxDxH) (mm)	1320x720x723
External Dimensions (WxDxH) (mm)	1456x858x890
With PackingDimensions (WxDxH) (mm)	1510x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57



UMD 1850 D BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	7,88/5,93
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/563
Gross/Net Weight (kg)	138/122
Internal Dimensions (WxDxH) (mm)	1720x720x723
External Dimensions (WxDxH) (mm)	1856x858x890
With PackingDimensions (WxDxH) (mm)	1910x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 1850 GB D BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	7,56/5,94
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	713/476
Gross/Net Weight (kg)	138/122
Internal Dimensions (WxDxH) (mm)	1720x720x650
External Dimensions (WxDxH) (mm)	1856x858x816
With PackingDimensions (WxDxH) (mm)	1910x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Noise Level (dB(A))	58



UMD 2100 D BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	8,92/7,67
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	905/653
Gross/Net Weight (kg)	170/152
Internal Dimensions (WxDxH) (mm)	1970x720x723
External Dimensions (WxDxH) (mm)	2106x858x890
With PackingDimensions (WxDxH) (mm)	2160x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 2500 D BODRUM

Climate Class	3
Energy Cons. (kWh/24h)	9,95/9,33
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	1100/797
Gross/Net Weight (kg)	191/172
Internal Dimensions (WxDxH) (mm)	2370x720x723
External Dimensions (WxDxH) (mm)	2500x858x890
With PackingDimensions (WxDxH) (mm)	2560x910x1000
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	20
Noise Level (dB(A))	58



UMD 1450 D İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	4,85/4,61
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	588/419
Gross/Net Weight (kg)	
Internal Dimensions (WxDxH) (mm)	1320x720x685
External Dimensions (WxDxH) (mm)	1456x858x890
With PackingDimensions (WxDxH) (mm)	1510x915x980
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57

SUPERMARKET FREEZERS / COOLERS



UMD 1850 D İZMİR


Climate Class	3
Energy Cons. (kWh/24h)	6,75/6,41
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/563
Gross/Net Weight (kg)	165/150
Internal Dimensions (WxDxH) (mm)	1720x720x685
External Dimensions (WxDxH) (mm)	1856x858x890
With PackingDimensions (WxDxH) (mm)	1915x915x980
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58



UMD 1850 GB D İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	6,34/5,99
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	713/476
Gross/Net Weight (kg)	158/143
Internal Dimensions (WxDxH) (mm)	1720x720x685
External Dimensions (WxDxH) (mm)	1856x858x832
With PackingDimensions (WxDxH) (mm)	1915x915x920
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS

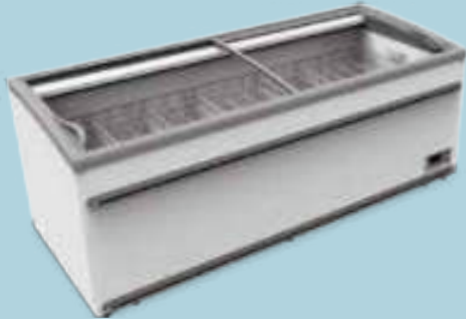

UMD 2100 D İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	7,09/6,48
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	905/653
Gross/Net Weight (kg)	180/163
Internal Dimensions (WxDxH) (mm)	1970x720x685
External Dimensions (WxDxH) (mm)	2106x858x890
With PackingDimensions (WxDxH) (mm)	2170x915x980
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58



UMD 2500 D İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	8,06/7,58
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	1100/797
Gross/Net Weight (kg)	220/200
Internal Dimensions (WxDxH) (mm)	2370x720x685
External Dimensions (WxDxH) (mm)	2506x858x890
With PackingDimensions (WxDxH) (mm)	2570x915x980
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	30
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 1450 D DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	5,28/5,06
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	588/377
Gross/Net Weight (kg)	
Internal Dimensions (WxDxH) (mm)	1320x720x685
External Dimensions (WxDxH) (mm)	1456x858x890
With PackingDimensions (WxDxH) (mm)	1510x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57



UMD 1850 D DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	7,41/7,09
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/511
Gross/Net Weight (kg)	165/150
Internal Dimensions (WxDxH) (mm)	1720x720x685
External Dimensions (WxDxH) (mm)	1856x858x890
With PackingDimensions (WxDxH) (mm)	1915x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 1850 GB D DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	6,98/6,65
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	713/433
Gross/Net Weight (kg)	158/143
Internal Dimensions (WxDxH) (mm)	1720x720x685
External Dimensions (WxDxH) (mm)	1856x858x832
With PackingDimensions (WxDxH) (mm)	1915x915x920
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58



UMD 2100 D DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	7,57/7,18
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	905/595
Gross/Net Weight (kg)	180/163
Internal Dimensions (WxDxH) (mm)	1970x720x685
External Dimensions (WxDxH) (mm)	2106x858x890
With PackingDimensions (WxDxH) (mm)	2170x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 2500 D DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	8,76/8,22
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	1100/729
Gross/Net Weight (kg)	220/200
Internal Dimensions (WxDxH) (mm)	2370x720x685
External Dimensions (WxDxH) (mm)	2506x858x890
With PackingDimensions (WxDxH) (mm)	2570x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	30
Noise Level (dB(A))	58



UMD 1450 D/S DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	"[5,28(for freezer R404A)/ 3,59(for meat R404A)/3,18(for cooler R404A)] [5,06(for freezer R290)/ 3,4(for meat R290)/3,02(for cooler R290)]"
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	588/302
Gross/Net Weight (kg)	
Internal Dimensions (WxDxH) (mm)	1320x720x685
External Dimensions (WxDxH) (mm)	1456x858x890
With PackingDimensions (WxDxH) (mm)	1510x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57

SUPERMARKET FREEZERS / COOLERS



UMD 1850 D/S DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	"[7,41(for freezer R404A)/ 4,54(for meat R404A)/3,88(for cooler R404A)] [7,09(for freezer R290)/ 4,36(for meat R290)/3,76(for cooler R290)]"
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/413
Gross/Net Weight (kg)	165/150
Internal Dimensions (WxDxH) (mm)	1720x720x685
External Dimensions (WxDxH) (mm)	1856x858x890
With PackingDimensions (WxDxH) (mm)	1915x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58



UMD 1850 GB D/S DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	"[6,98(for freezer R404A)/3,93(for meat R404A)/3,39(for cooler R404A)] [6,65(for freezer R290)/ 3,74(for meat R290)/3,20(for cooler R290)]"
Temperature Range °C	[18/-23][-2/+2][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	713/335
Gross/Net Weight (kg)	158/143
Internal Dimensions (WxDxH) (mm)	1720x720x685
External Dimensions (WxDxH) (mm)	1856x858x832
With PackingDimensions (WxDxH) (mm)	1915x915x920
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 2100 D/S DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	"[7,57(for freezer R404A)/4,94(for meat R404A)/4,26(for cooler R404A)] [7,18(for freezer R290)/ 4,69(for meat R290)/4,05(for cooler R290)]"
Temperature Range °C	[18/-23][-2/+2][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	905/483
Gross/Net Weight (kg)	180/163
Internal Dimensions (WxDxH) (mm)	1970x720x685
External Dimensions (WxDxH) (mm)	2106x858x890
With PackingDimensions (WxDxH) (mm)	2170x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58



UMD 2500 D/S DF İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	"[8,76(for freezer R404A)/5,53(for meat R404A)/4,95(for cooler R404A)] [8,22(for freezer R290)/5,26(for meat R290)/ 4,61(for cooler R290)]"
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	1100/594
Gross/Net Weight (kg)	220/200
Internal Dimensions (WxDxH) (mm)	2370x720x685
External Dimensions (WxDxH) (mm)	2506x858x890
With PackingDimensions (WxDxH) (mm)	2570x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	30
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 1450 D/S DF VS İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	[4,62(for freezer R290)/ 3,02(for meat R290)/2,75(for cooler R290)]
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R290
Gross/Net Volume (lt)	588/302
Gross/Net Weight (kg)	
Internal Dimensions (WxDxH) (mm)	1320x720x685
External Dimensions (WxDxH) (mm)	1456x858x890
With PackingDimensions (WxDxH) (mm)	1510x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57



UMD 1850 D/S DF VS İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	[6,09(for freezer R290)/3,88(for meat R290)/3,39(for cooler R290)]
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R290
Gross/Net Volume (lt)	783/413
Gross/Net Weight (kg)	165/150
Internal Dimensions (WxDxH) (mm)	1720x720x685
External Dimensions (WxDxH) (mm)	1856x858x890
With PackingDimensions (WxDxH) (mm)	1915x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 1850 GB D/S DF VS İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	[5,66(for freezer R290)/3,36(for meat R290)/2,85(for cooler R290)]
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R290
Gross/Net Volume (lt)	713/335
Gross/Net Weight (kg)	158/143
Internal Dimensions (WxDxH) (mm)	1720x720x685
External Dimensions (WxDxH) (mm)	1856x858x832
With PackingDimensions (WxDxH) (mm)	1915x915x920
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58



UMD 2100 D/S DF VS İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	[6,35(for freezer R290)/4,23(for meat R290)/3,60(for cooler R290)]
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R290
Gross/Net Volume (lt)	905/483
Gross/Net Weight (kg)	180/163
Internal Dimensions (WxDxH) (mm)	1970x720x685
External Dimensions (WxDxH) (mm)	2106x858x890
With PackingDimensions (WxDxH) (mm)	2170x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 2500 D/S DF VS İZMİR

Climate Class	3
Energy Cons. (kWh/24h)	[7,36(for freezer R290)/4,73(for meat R290)/ 4,03(for cooler R290)]
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R290
Gross/Net Volume (lt)	1100/594
Gross/Net Weight (kg)	220/200
Internal Dimensions (WxDxH) (mm)	2370x720x685
External Dimensions (WxDxH) (mm)	2506x858x890
With PackingDimensions (WxDxH) (mm)	2570x915x980
Seperator(pcs)	1
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	30
Noise Level (dB(A))	58



UMD 2100 D3K D/S DF MARMARİS

Climate Class	3
Energy Cons. (kWh/24h)	16,04
Temperature Range °C	-18/-23
Refrigerant	R404A
Gross/Net Volume (lt)	870/531
Gross/Net Weight (kg)	260/235
Internal Dimensions (WxDxH) (mm)	1978x478x947
External Dimensions (WxDxH) (mm)	2100x800x2333
With PackingDimensions (WxDxH) (mm)	2270x900x2575
Seperator(pcs)	
Loadability (pc)	
20ft DC	
40ft DC	
80 m³ Truck	15
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS



UMD 2500 D4K D/S DF MARMARİS


Climate Class	3
Energy Cons. (kWh/24h)	18,04
Temperature Range °C	-18/-23
Refrigerant	R404A
Gross/Net Volume (lt)	1076/650
Gross/Net Weight (kg)	290/260
Internal Dimensions (WxDxH) (mm)	2378x478x947
External Dimensions (WxDxH) (mm)	2500x800x2333
With PackingDimensions (WxDxH) (mm)	2670x900x2575
Seperator(pcs)	
Loadability (pc)	
20ft DC	
40ft DC	
80 m³ Truck	15
Noise Level (dB(A))	58



UMD 1450 D KAPADOKYA


Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	588/419
Gross/Net Weight (kg)	
Internal Dimensions (WxDxH) (mm)	1320x720x662
External Dimensions (WxDxH) (mm)	1456x858x826
With PackingDimensions (WxDxH) (mm)	1510x915x885
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57

SUPERMARKET FREEZERS / COOLERS

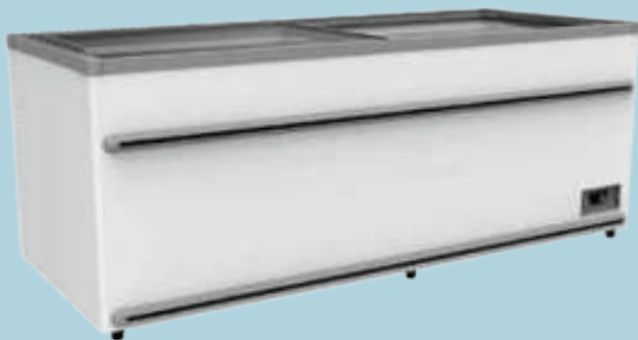

UMD 1850 D KAPADOKYA


Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/563
Gross/Net Weight (kg)	165/150
Internal Dimensions (WxDxH) (mm)	1720x720x662
External Dimensions (WxDxH) (mm)	1856x858x826
With PackingDimensions (WxDxH) (mm)	1915x915x885
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

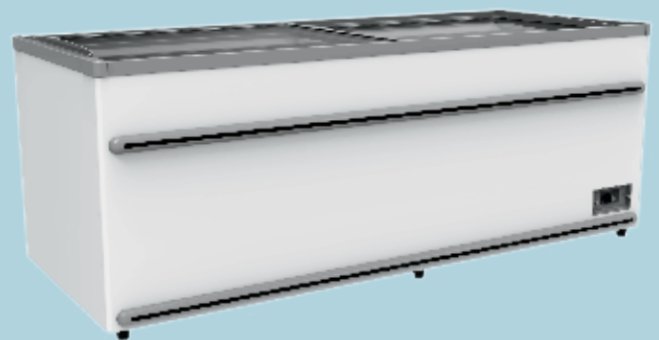

UMD 2100 D KAPADOKYA


Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	905/653
Gross/Net Weight (kg)	180/163
Internal Dimensions (WxDxH) (mm)	1970x720x662
External Dimensions (WxDxH) (mm)	2106x858x826
With PackingDimensions (WxDxH) (mm)	2170x915x885
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS

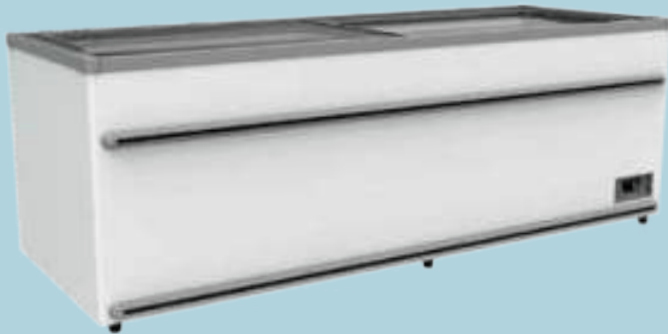

UMD 2500 D KAPADOKYA


Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	1100/797
Gross/Net Weight (kg)	220/200
Internal Dimensions (WxDxH) (mm)	2370x720x662
External Dimensions (WxDxH) (mm)	2506x858x826
With PackingDimensions (WxDxH) (mm)	2570x915x885
Seperator(pcs)	Optional
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	30
Noise Level (dB(A))	58

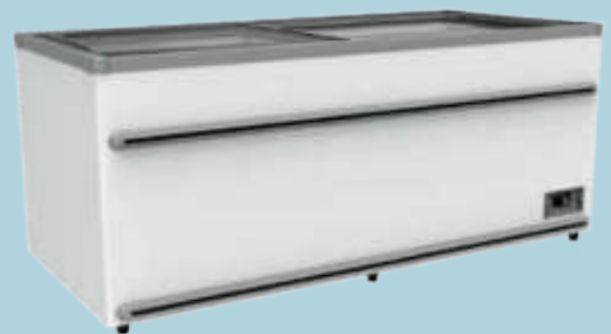

UMD 1450 D DF KAPADOKYA


Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	588/377
Gross/Net Weight (kg)	
Internal Dimensions (WxDxH) (mm)	1320x720x662
External Dimensions (WxDxH) (mm)	1456x858x826
With PackingDimensions (WxDxH) (mm)	1510x915x885
Seperator(pcs)	1
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57

SUPERMARKET FREEZERS / COOLERS

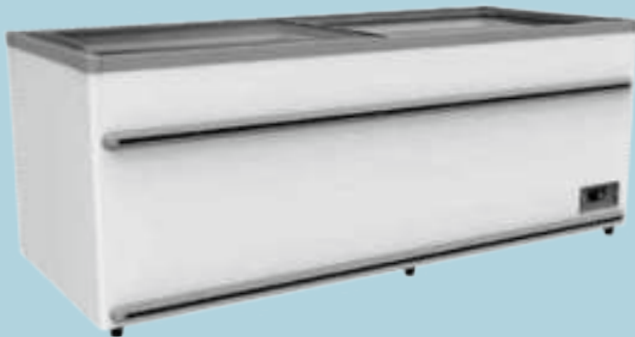

UMD 1850 D DF KAPADOKYA


Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/511
Gross/Net Weight (kg)	165/150
Internal Dimensions (WxDxH) (mm)	1720x720x662
External Dimensions (WxDxH) (mm)	1856x858x826
With PackingDimensions (WxDxH) (mm)	1915x915x885
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

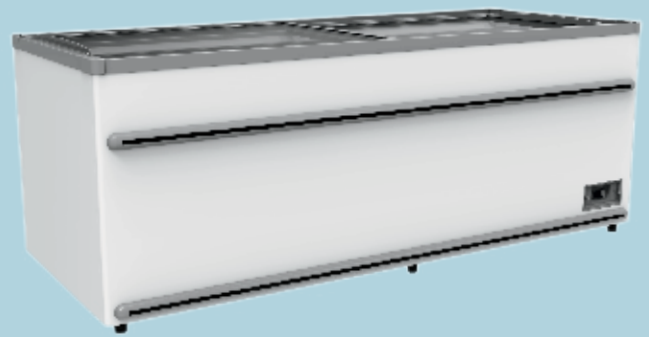

UMD 2100 D DF KAPADOKYA


Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	905/595
Gross/Net Weight (kg)	180/163
Internal Dimensions (WxDxH) (mm)	1970x720x662
External Dimensions (WxDxH) (mm)	2106x858x826
With PackingDimensions (WxDxH) (mm)	2170x915x885
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

SUPERMARKET FREEZERS / COOLERS

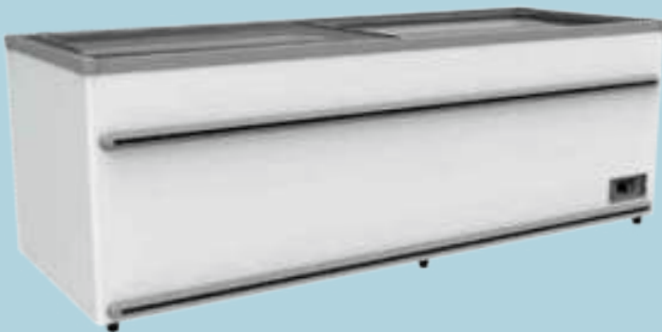

UMD 2500 D DF KAPADOKYA


Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	-18/-23
Refrigerant	R404A/R290
Gross/Net Volume (lt)	1100/729
Gross/Net Weight (kg)	220/200
Internal Dimensions (WxDxH) (mm)	2370x720x662
External Dimensions (WxDxH) (mm)	2506x858x826
With PackingDimensions (WxDxH) (mm)	2570x915x885
Seperator(pcs)	1
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	30
Noise Level (dB(A))	58

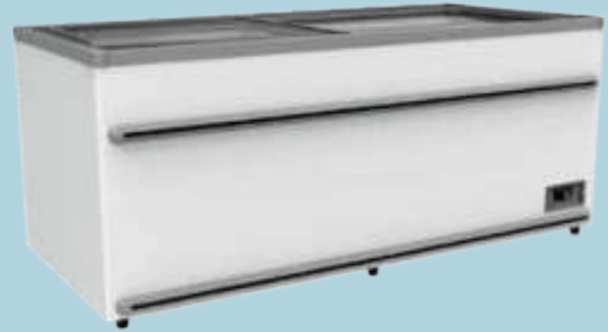

UMD 1450 D/S DF KAPADOKYA

Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	588/302
Gross/Net Weight (kg)	
Internal Dimensions (WxDxH) (mm)	1320x720x662
External Dimensions (WxDxH) (mm)	1456x858x826
With PackingDimensions (WxDxH) (mm)	1510x915x885
Seperator(pcs)	1
Loadability (pc)	
20ft DC	14
40ft DC	30
80 m³ Truck	34
Noise Level (dB(A))	57

SUPERMARKET FREEZERS / COOLERS

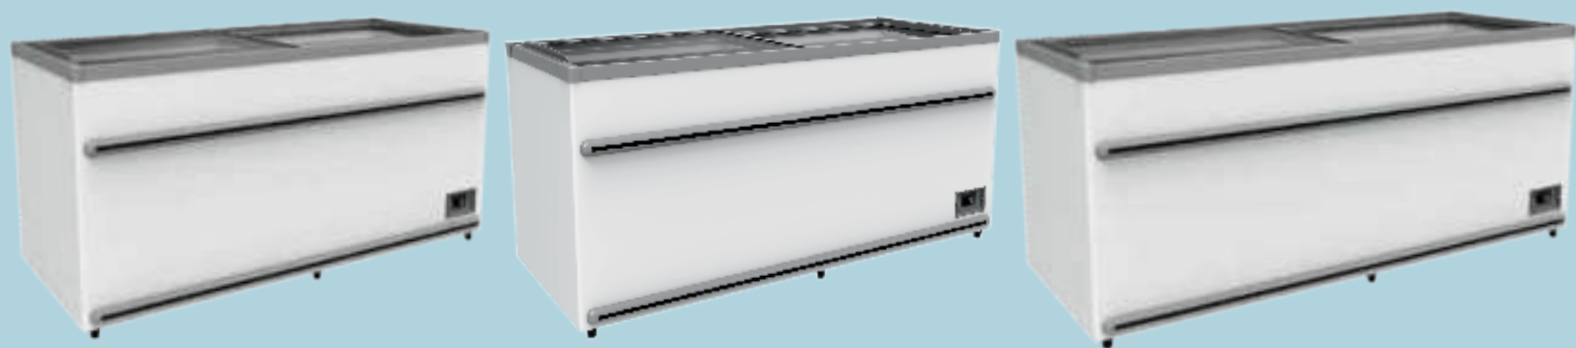

UMD 1850 D/S DF KAPADOKYA


Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	783/413
Gross/Net Weight (kg)	165/150
Internal Dimensions (WxDxH) (mm)	1720x720x662
Extarnal Dimensions (WxDxH) (mm)	1856x858x826
With PackingDimensions (WxDxH) (mm)	1915x915x885
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

UMD 2100 D/S DF KAPADOKYA

Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	905/483
Gross/Net Weight (kg)	180/163
Internal Dimensions (WxDxH) (mm)	1970x720x662
Extarnal Dimensions (WxDxH) (mm)	2106x858x826
With PackingDimensions (WxDxH) (mm)	2170x915x885
Seperator(pcs)	1
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	42
Noise Level (dB(A))	58

UMD 2500 D/S DF KAPADOKYA

Climate Class	3
Energy Cons. (kWh/24h)	Under Development Test
Temperature Range °C	[-18/-23][-2/+2][-1/+5]
Refrigerant	R404A/R290
Gross/Net Volume (lt)	1100/594
Gross/Net Weight (kg)	220/200
Internal Dimensions (WxDxH) (mm)	2370x720x662
Extarnal Dimensions (WxDxH) (mm)	2506x858x826
With PackingDimensions (WxDxH) (mm)	2570x915x885
Seperator(pcs)	1
Loadability (pc)	
20ft DC	8
40ft DC	16
80 m³ Truck	30
Noise Level (dB(A))	58

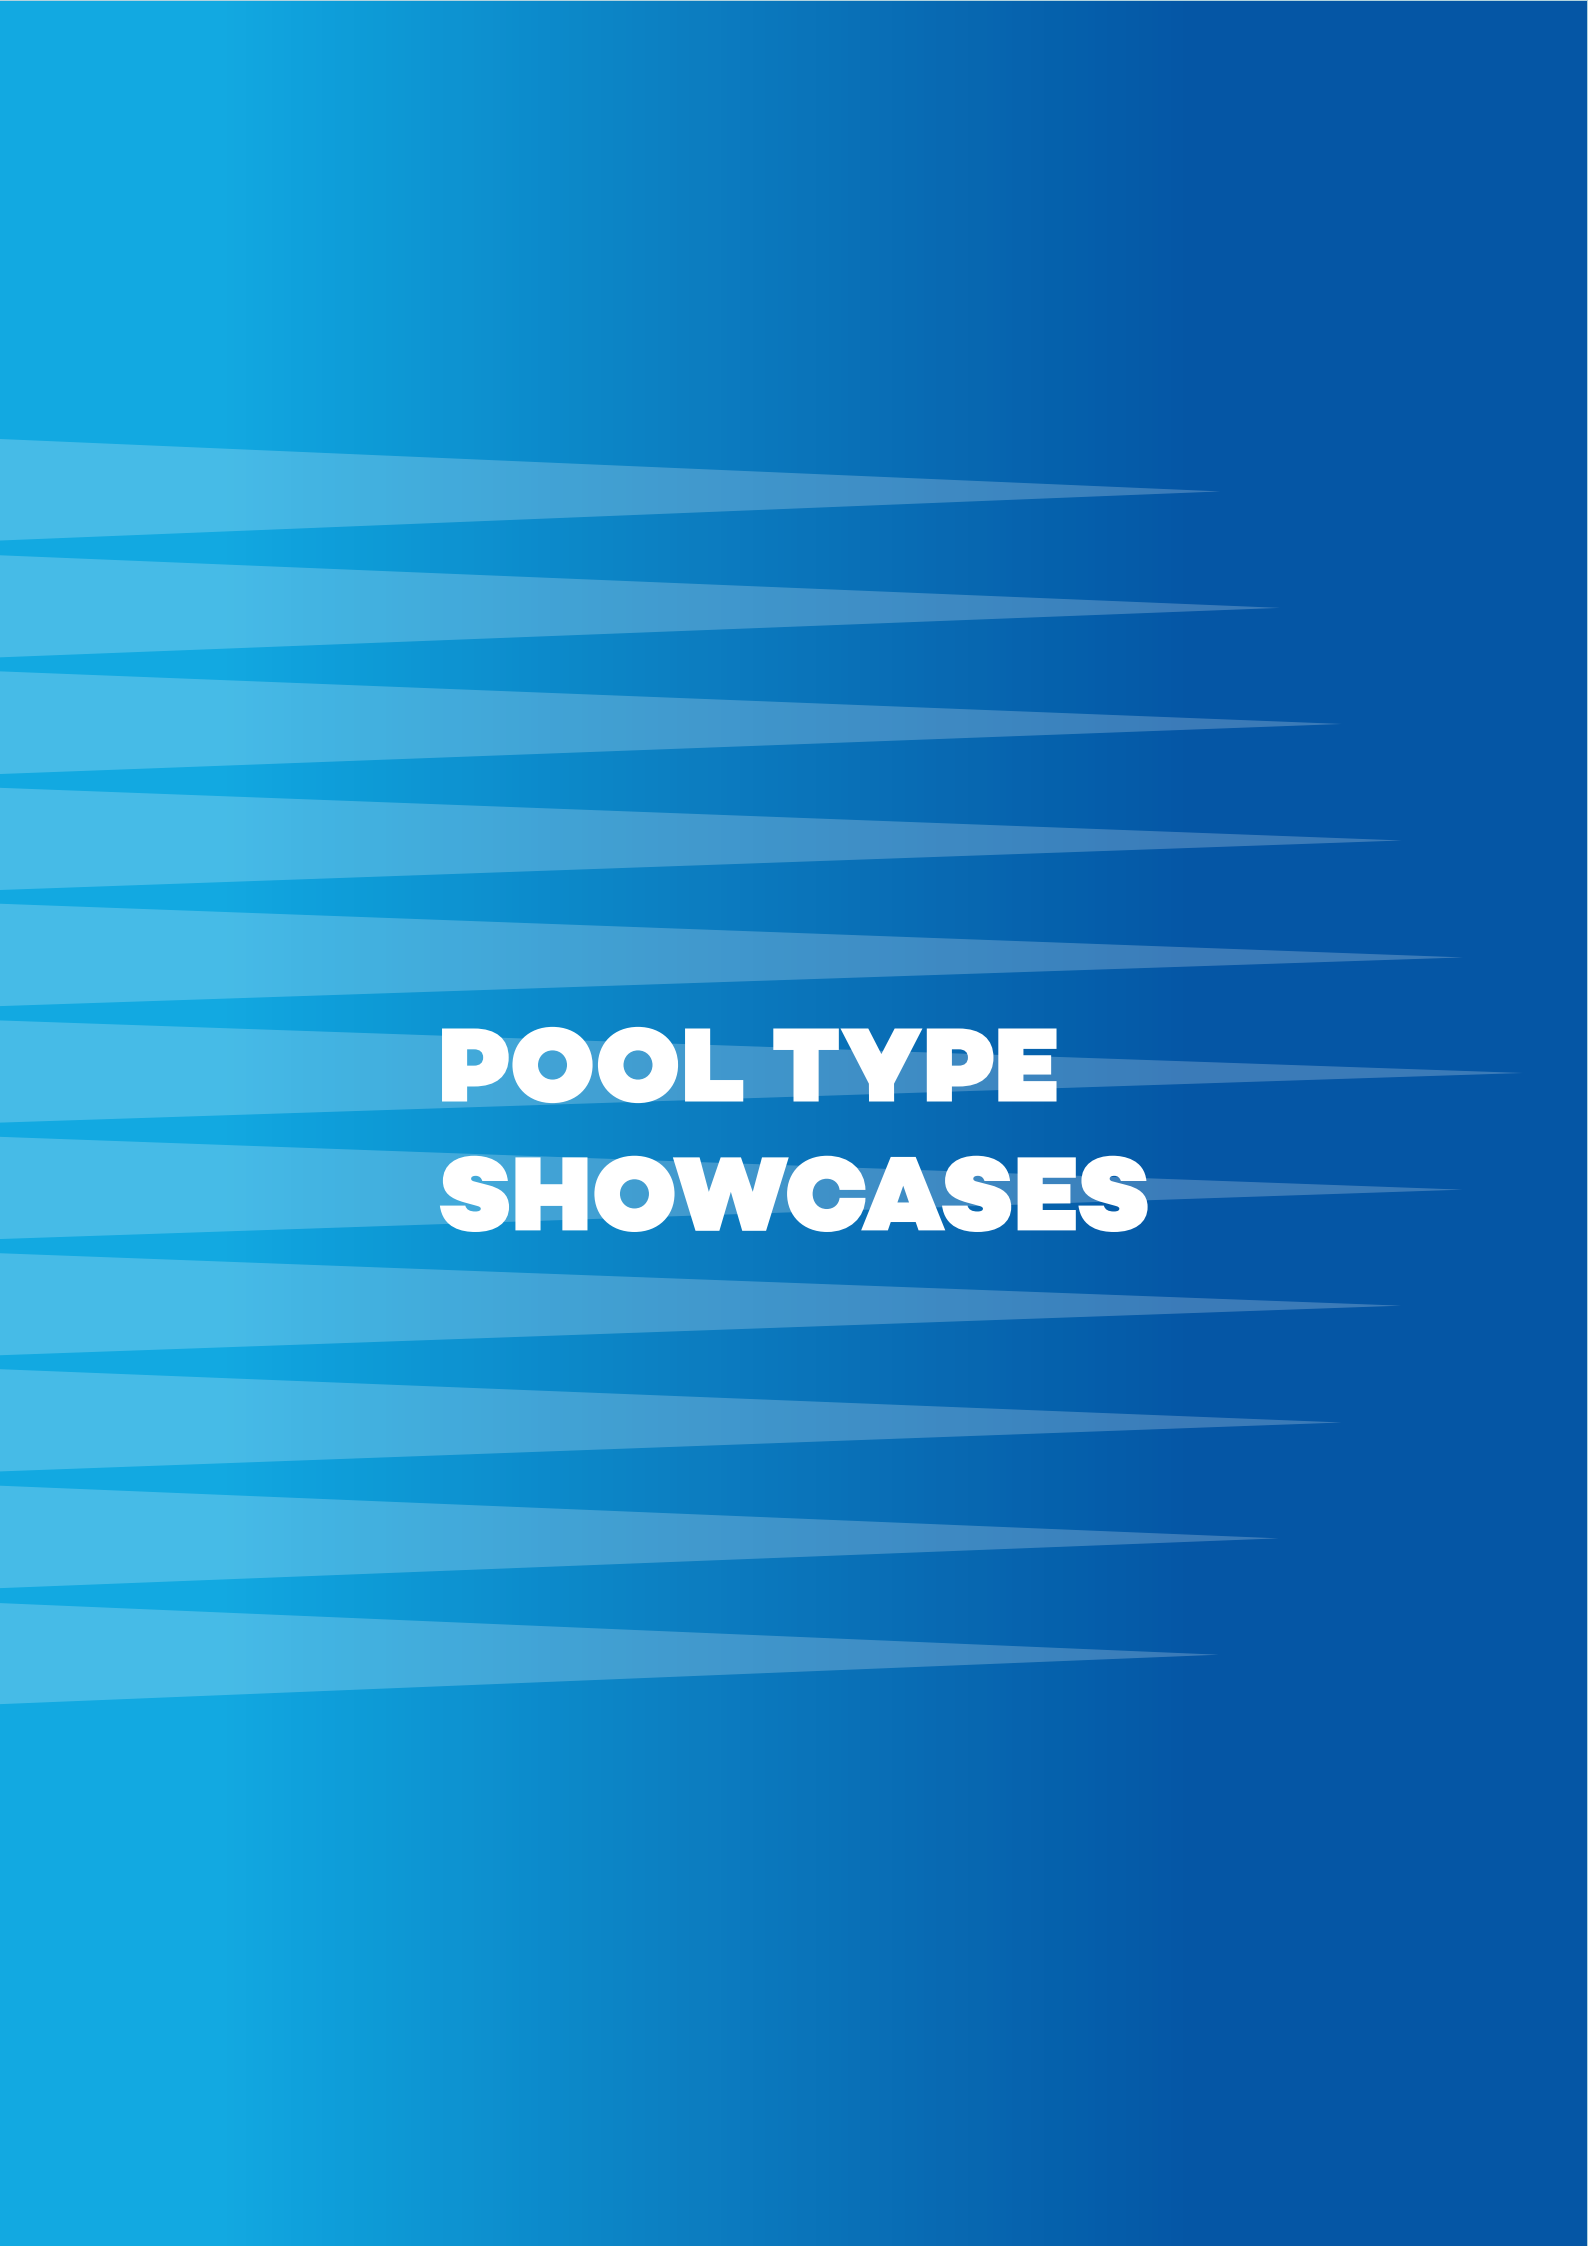

POOL TYPE SHOWCASES

POOL TYPE SHOWCASES



UMD 200 HS

Climate Class	3
Energy Cons. (kWh/24h)	9
Temperature Range °C	+1/+10
Refrigerant	R404A
Gross/Net Volume (lt)	200/165
Gross/Net Weight (kg)	138/128
Internal Dimensions (WxDxH) (mm)	705x1075x295
External Dimensions (WxDxH) (mm)	1015x1255x905
Loadability (pc)	
20ft DC	9
40ft DC	20
80 m³ Truck	23
Noise Level (dB(A))	54,5



UMD 200 HD

Climate Class	3
Energy Cons. (kWh/24h)	15
Temperature Range °C	-12/-22
Refrigerant	R404A
Gross/Net Volume (lt)	200/165
Gross/Net Weight (kg)	138/128
Internal Dimensions (WxDxH) (mm)	705x1075x295
External Dimensions (WxDxH) (mm)	1015x1255x905
Loadability (pc)	
20ft DC	9
40ft DC	20
80 m³ Truck	23
Noise Level (dB(A))	54,5



ICE CREAM SHOWCASES

ICE CREAM SHOWCASES



UDR 7 B

Temperature Range °C	-12/-22
Climate Class	4
Ice Cream Box Volume (lt)	4,8
No of ice cream box	7
Gross/Net Weight (kg)	144/134
Dimensions (WxDxH) (mm)	
Internal	1220x550x500
External	1360x720x1250
With Packing	1380x780x1310
Loadability (pc)	
20ft DC	12
40ft DC	25
80 m³ Truck	28
Input Power (W)	900
Energy Cons. (kWh/24h)	14/
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	55

UDR 9 B

Temperature Range °C	-12/-22
Climate Class	4
Ice Cream Box Volume (lt)	4,8
No of ice cream box	9
Gross/Net Weight (kg)	188/177
Dimensions (WxDxH) (mm)	
Internal	1535X550X500
External	1680x720x1250
With Packing	1750X780X1310
Loadability (pc)	
20ft DC	9
40ft DC	19
80 m³ Truck	22
Input Power (W)	1050
Energy Cons. (kWh/24h)	17,8/
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	55

UDR 12 BEYAZID

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	4,8
No of ice cream box	12
Gross/Net Weight (kg)	240/230
Dimensions (WxDxH) (mm)	
Internal	990X918X225
External	1175x1125x1340
With Packing	1200x1170x1450
Loadability (pc)	
20ft DC	4
40ft DC	9
80 m³ Truck	10
Input Power (W)	1250
Energy Cons. (kWh/24h)	20/
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	55

ICE CREAM SHOWCASES



UDR 12 BARBAROS

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	4,8
No of ice cream box	12
Gross/Net Weight (kg)	240/230
Dimensions (WxDxH) (mm)	
Internal	990X918X225
External	1175x1130x1340
With Packing	1200x1170x1450
Loadability (pc)	
20ft DC	4
40ft DC	9
80 m³ Truck	10
Input Power (W)	1250
Energy Cons. (kWh/24h)	20/
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	55

UDR 12 KANUNI

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	4,8
No of ice cream box	12
Gross/Net Weight (kg)	240/230
Dimensions (WxDxH) (mm)	
Internal	990X918X225
External	1175x1135x1340
With Packing	1200x1170x1450
Loadability (pc)	
20ft DC	4
40ft DC	9
80 m³ Truck	10
Input Power (W)	1250
Energy Cons. (kWh/24h)	20/
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	55

UDR 12 YAVUZ

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	4,8
No of ice cream box	12
Gross/Net Weight (kg)	240/230
Dimensions (WxDxH) (mm)	
Internal	990X918X225
External	1150x1135x1340
With Packing	1200x1170x1450
Loadability (pc)	
20ft DC	4
40ft DC	9
80 m³ Truck	10
Input Power (W)	1250
Energy Cons. (kWh/24h)	20/
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	55

ICE CREAM SHOWCASES



UDR 18 ERTUĞRUL

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	4,8
No of ice cream box	18
Gross/Net Weight (kg)	341/326
Dimensions (WxDxH) (mm)	
Internal	1540X918X225
External	1725x1130x1340
With Packing	1750X1170X1450
Loadability (pc)	
20ft DC	5
40ft DC	10
80 m³ Truck	11
Input Power (W)	2800/1250
Energy Cons. (kWh/24h)	27/19
Type of cooling	Electronic
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	55



UDR 5 SCE

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	5
No of ice cream box	5
Gross/Net Weight (kg)	85/71
Dimensions (WxDxH) (mm)	
Internal	890x510x708/610
External	1009x615x832/712
With Packing	1040x680x890
Loadability (pc)	
20ft DC	32
40ft DC	68
80 m³ Truck	114
Input Power (W)	220/157
Energy Cons. (kWh/24h)	2,9/2,23
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	52,3



UDR 7 SCE

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	4,8
No of ice cream box	7
Gross/Net Weight (kg)	81/65
Dimensions (WxDxH) (mm)	
Internal	1180x500x708/610
External	1298x615x832/712
With Packing	1330x680x890
Loadability (pc)	
20ft DC	24
40ft DC	50
80 m³ Truck	90
Input Power (W)	300/168
Energy Cons. (kWh/24h)	4,9/2,64
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	53,8

ICE CREAM SHOWCASES



UDR 8 SCE

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	4,8
No of ice cream box	8
Gross/Net Weight (kg)	102/85
Dimensions (WxDxH) (mm)	
Internal	1430x495x708/610
External	1548x615x949/829
With Packing	1640x7680x890
Loadability (pc)	
20ft DC	20
40ft DC	42
80 m³ Truck	52
Input Power (W)	400
Energy Cons. (kWh/24h)	6,4/
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	53,8



UDR 10 SCE

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	5
No of ice cream box	10
Gross/Net Weight (kg)	113/93
Dimensions (WxDxH) (mm)	
Internal	895x790x710/602
External	1013x900x832/707
With Packing	1110x980x1365
Loadability (pc)	
20ft DC	10
40ft DC	24
80 m³ Truck	52
Input Power (W)	220
Energy Cons. (kWh/24h)	3,6
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R290
Noise Level (dB(A))	54



UDR 14 ANKA

Temperature Range °C	-18/-23
Climate Class	7
Ice Cream Box Volume (lt)	5
No of ice cream box	14
Gross/Net Weight (kg)	203/188
Dimensions (WxDxH) (mm)	
Internal	1230x790x710/602
External	1390x1115x1210
With Packing	1475x1250x1290
Loadability (pc)	
20ft DC	4
40ft DC	9
80 m³ Truck	20
Input Power (W)	430/345
Energy Cons. (kWh/24h)	8,3/5,9
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R404A/R290
Noise Level (dB(A))	55

COLD BEVERAGE DISPENSERS

COLD BEVERAGE DISPENSERS



USM 10

Temperature Range °C	+5/+10
Climate Class	4
Gross/Net Volume (lt)	11/10
Gross/Net Weight (kg)	23/21,5
POWER (W)	350
Dimensions (WxDxH) (mm)	
External	180x500x580
With Packing	280x580x650
Loadability (pc)	
20ft DC	252
40ft DC	504
80 m³ Truck	576
Power Supply	230/50
Energy Cons. (kWh/24h)	4
Refrigerant	R134a



USM 20 A

Temperature Range °C	+5/+10
Climate Class	4
Gross/Net Volume (lt)	22/20
Gross/Net Weight (kg)	24/22
POWER (W)	400
Dimensions (WxDxH) (mm)	
External	180x500x705
With Packing	280x580x780
Loadability (pc)	
20ft DC	252
40ft DC	504
80 m³ Truck	576
Power Supply	230/50
Energy Cons. (kWh/24h)	4,2
Refrigerant	R134a



USM 20

Temperature Range °C	+5/+10
Climate Class	4
Gross/Net Volume (lt)	22/20
Gross/Net Weight (kg)	25/23
POWER (W)	400
Dimensions (WxDxH) (mm)	
External	180x500x705
With Packing	280x580x780
Loadability (pc)	
20ft DC	252
40ft DC	504
80 m³ Truck	576
Power Supply	230/50
Energy Cons. (kWh/24h)	4,3
Refrigerant	R134a

COLD BEVERAGE DISPENSERS



USM 4x20 A

Temperature Range °C	+5/+10
Climate Class	4
Gross/Net Volume (lt)	88/80
Gross/Net Weight (kg)	55/51
POWER (W)	600
Dimensions (WxDxH) (mm)	
External	720x500x705
With Packing	820x580x780
Loadability (pc)	
20ft DC	84
40ft DC	168
80 m³ Truck	192
Power Supply	230/50
Energy Cons. (kWh/24h)	8,8
Refrigerant	R134a



USM 10+10 S/A

Temperature Range °C	+5/+10
Climate Class	4
Gross/Net Volume (lt)	22/20
Gross/Net Weight (kg)	32/30
POWER (W)	400
Dimensions (WxDxH) (mm)	
External	360x500x580
With Packing	460x580x650
Loadability (pc)	
20ft DC	150
40ft DC	312
80 m³ Truck	345
Power Supply	230/50
Energy Cons. (kWh/24h)	4,5
Refrigerant	R134a



USM 20+10 S/A

Temperature Range °C	+5/+10
Climate Class	4
Gross/Net Volume (lt)	33/30
Gross/Net Weight (kg)	42/39,5
POWER (W)	500
Dimensions (WxDxH) (mm)	
External	540x500x580
With Packing	640x580x650
Loadability (pc)	
20ft DC	108
40ft DC	216
80 m³ Truck	252
Power Supply	230/50
Energy Cons. (kWh/24h)	5,9
Refrigerant	R134a

COLD BEVERAGE DISPENSERS



USM 20+20 S/A

Temperature Range °C	+5/+10
Climate Class	4
Gross/Net Volume (lt)	44/40
Gross/Net Weight (kg)	34/32,5
POWER (W)	550
Dimensions (WxDxH) (mm)	
External	360x500x705
With Packing	460x580x780
Loadability (pc)	
20ft DC	108
40ft DC	216
80 m³ Truck	252
Power Supply	230/50
Energy Cons. (kWh/24h)	5,9
Refrigerant	R134a



USM 40+20 S/A

Temperature Range °C	+5/+10
Climate Class	4
Gross/Net Volume (lt)	66/60
Gross/Net Weight (kg)	46/43
POWER (W)	600
Dimensions (WxDxH) (mm)	
External	540x500x705
With Packing	640x580x780
Loadability (pc)	
20ft DC	108
40ft DC	216
80 m³ Truck	252
Power Supply	230/50
Energy Cons. (kWh/24h)	8,1
Refrigerant	R134a



USM 19

Temperature Range °C	+5/+10
Climate Class	4
Gross/Net Volume (lt)	20/19
Gross/Net Weight (kg)	20/18
POWER (W)	382,2
Dimensions (WxDxH) (mm)	
External	352x402x720
With Packing	390x480x780
Loadability (pc)	
20ft DC	216
40ft DC	450
80 m³ Truck	510
Power Supply	230/50
Energy Cons. (kWh/24h)	1,859
Refrigerant	R134a

PASTRY DISPLAY CABINETS

PASTRY DISPLAY CABINETS



UPR 1

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	464/460
Gross/Net Weight (kg)	176/170
Dimensions (WxDxH) (mm)	
External	700x730x1790
With Packing	750x770x1950
Loadability (pc)	
20ft DC	21
40ft DC	48
80 m³ Truck	54
Shelves/Baskets (pcs)	5
Energy Cons. (kWh/24h)	12,3
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a



UPR 2

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	953/946
Gross/Net Weight (kg)	320/310
Dimensions (WxDxH) (mm)	
External	1380x730x1790
With Packing	1430x770x1950
Loadability (pc)	
20ft DC	12
40ft DC	24
80 m³ Truck	27
Shelves/Baskets (pcs)	5x2
Energy Cons. (kWh/24h)	18,5
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a

PASTRY DISPLAY CABINETS



UPR 3

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	1422/1413
Gross/Net Weight (kg)	385/370
Dimensions (WxDxH) (mm)	
External	2010x700x1790
With Packing	2060x770x1950
Loadability (pc)	
20ft DC	8
40ft DC	17
80 m³ Truck	19
Shelves/Baskets (pcs)	10+5
Energy Cons. (kWh/24h)	24
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a



UPR 1 A

Temperature Range °C	+1/+10
Climate Class	4
Gross/Net Volume (lt)	575/460
Gross/Net Weight (kg)	215/205
Dimensions (WxDxH) (mm)	
External	775x805x1785
With Packing	920x950x2050
Loadability (pc)	
20ft DC	12
40ft DC	26
80 m³ Truck	28
Shelves/Baskets (pcs)	5
Energy Cons. (kWh/24h)	12,3
Type of cooling	Mechanical
Power supply (V/Hz)	230/50
Refrigerant	R134a

ICE MACHINES

ICE MACHINES



UBM 20

Ice Making Capacity (kg/24h)	20
Ice Capacity For One Cyle (pcs)	12
Weight Of Ice (g)	123-170
Ice Storage Capacity (kg)	1,2
Gross/Net Weight[kg]	18,4/16,7
Dimensions [W*D*H] [mm]	
External	380x435x431
With Packing	420x485x472
Loadability [pcs]	
20'ft Dc	256
40'ft Dc	528
80 m³ Truck	
Energy Cons. (kWh/24h)	3,4
Refrigerant (Std/opt)	R134a



UBM 30

Ice Making Capacity (kg/24h)	32
Ice Capacity For One Cyle (pcs)	24
Weight Of Ice (g)	20-25
Ice Storage Capacity (kg)	10-12
Gross/Net Weight[kg]	48/46
Dimensions [W*D*H] [mm]	
External	520x625x660
With Packing	550x645x695
Loadability [pcs]	
20'ft Dc	72
40'ft Dc	144
80 m³ Truck	180
Energy Cons. (kWh/24h)	10,8
Refrigerant (Std/opt)	R134a

ICE MACHINES



UBM 60

Ice Making Capacity (kg/24h)	48
Ice Capacity For One Cycle (pcs)	32
Weight Of Ice (g)	20-25
Ice Storage Capacity (kg)	20-24
Gross/Net Weight[kg]	65/63
Dimensions [W*D*H] [mm]	
External	600x565x880
With Packing	615x590x910
Loadability [pcs]	
20'ft Dc	60
40'ft Dc	120
80 m³ Truck	180
Energy Cons. (kWh/24h)	14,5
Refrigerant (Std/opt)	R134a



UBM 100

Ice Making Capacity (kg/24h)	70
Ice Capacity For One Cycle (pcs)	40
Weight Of Ice (g)	20-25
Ice Storage Capacity (kg)	35-40
Gross/Net Weight[kg]	74-71
Dimensions [W*D*H] [mm]	
External	680x560x1130
With Packing	700x600x1170
Loadability [pcs]	
20'ft Dc	48
40'ft Dc	102
80 m³ Truck	152
Energy Cons. (kWh/24h)	17,2
Refrigerant (Std/opt)	R134a

WATER DISPENSER



USP 85

Temperature Range [°C]	+5/+10
Climate Class	4
Hot water tank volume (lt)	/
Cold water tank volume (lt)	72
Heating capacity (lt/h)	/
Cooling capacity (lt/h)	/
Gross/net Weight [kg]	56/52
Dimensions [W*D*H] [mm]	
External	600x415x1385
With Packing	640x480x1420
Loadability [pcs]	
20'ft Dc	36
40'ft Dc	75
80 m³ Truck	105
Power supply [V/Hz]	230/50
Refrigerant (Std/opt)	R134a



Yeni Sanayi Mahallesi Devlet Kara Yolu Caddesi No : 127/C Nazilli – AYDIN / TURKEY Phone: +90 256 316 10 00 (pbx) Fax: +90 256 316 10 31
Uğur Plaza, Mahmutbey Mah. Peyami Safa Cad. Doğukan Sok. No: 9 Bağcılar – İSTANBUL/ TURKEY Phone: +90 212 624 32 28 (pbx) Fax: +90 212 598 94 26

www.ugur.com • export@ugur.com