

MXG 437

xSafeEcoX

Modular Ice Machine 170 kg

Item
Project
Quantity



- FEATURES
- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
 - Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
 - Electronic control board with self diagnostic and malfunction alarms.
 - External indicator lights: keeps ice maker's operations under constant surveillance.
 - Front access condenser air filter, removable and washable (air cooled version only).
 - Clean alert: advises with a blink when it's time to clean the filter.
 - XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MXG L

Large Gourmet 39 g

Ø 38 mm - H 41 mm



MXG M

Medium Gourmet 20 g

Ø 30 mm - H 34 mm



MXG S

Small Gourmet 8 g

Ø 21 mm - H 25 mm

CONDENSING
SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE
V/HZ/PH

230\50\1

RECOMMENDED BIN

BIN

KG

SB393

181

Model	Cube	Ø	H	Weight
MXG L	Large	38 mm	41 mm	39 g
MXG M	Medium	30 mm	34 mm	20 g
MXG S	Small	21 mm	25 mm	8 g

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it

www.scotsman-ice.com

Modular Ice Machine 170 kg


MXG 437

xSafeEcoX

Modular Ice Machine 170 kg

Item
Project
Quantity

Modular Ice Machine 170 kg

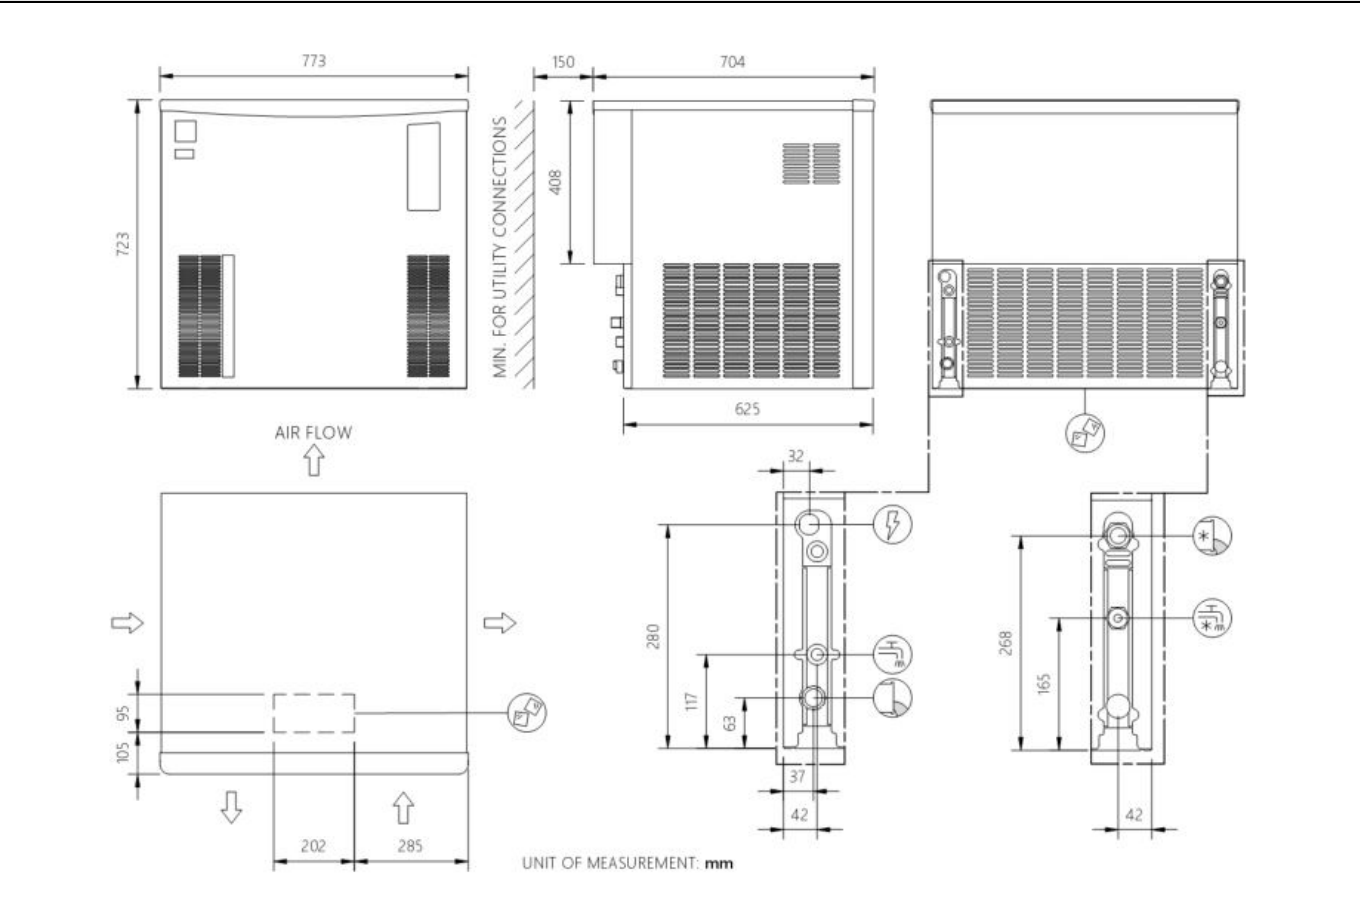

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)								
773 x 704 x 721 mm			830 x 770 x 920 mm								
Net weight			Gross weight								
73 kg			85kg								
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm2	A
			kg	kg	kg						
MXG M 437 AS	230\50\1	A	170	165	135	2,8	27	18	1.400	3 x 1,5	16
MXG S 437 AS	230\50\1	A	165	155	135	2,8	26	28	1.400	3 x 1,5	10
MXG L 437 AS	230\50\1	A	157	160	130	2,8	26	14	1.400	3 x 1,5	10