




- A = Caricamento acqua / Chargement eau / Water inlet
Wassereintritt / Carga agua: 3/4 "
- B = Allacciamento elettrico / Branchement électrique
Electric connection / Elektrischer Anschluss / Conexión electrica
- C = Scarico / Vidange / Drain / Abfluss / Desagüe: 1 "



OPTIONAL

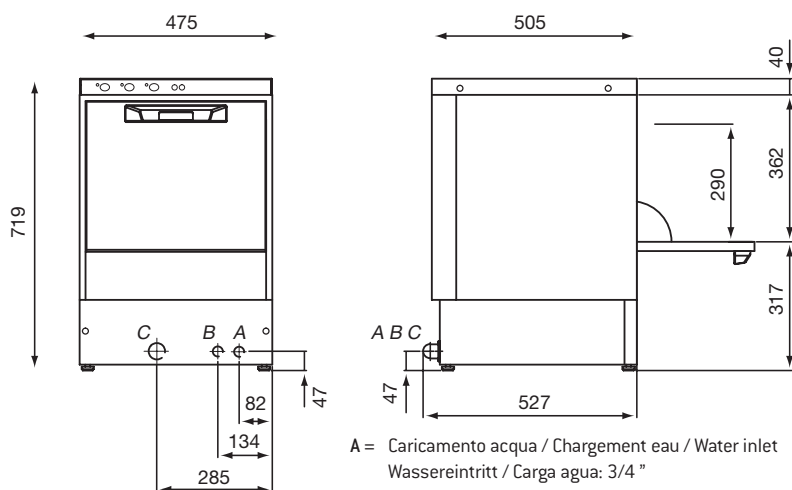

- Pannello inferiore in acciaio inox
- Stainless steel bottom panel
- Panneau socle en acier inox
- Edelstahl unter Teil
- Panel inferior en acero inox



- Inserto bicchieri inclinato
- Tilted insert for glasses
- Insert incliné pour verres
- Schräggehende Gläserersatz
- Insertador inclinado para vasos



1000 ÷ 1200



1x230 V
50 Hz



400x400 mm

OPTIONAL

DD



- Dosatore Detersivo Peristaltico regolabile
- Adjustable Peristaltic Soap Pump
- Doseur de produit de lavage
- Spülmitteldosierer, regulierbar
- Dosificador de detergente regulable

PS



- Pompa di scarico
- Drain pump
- Pompe de vidange
- Ablaufpumpe
- Bomba de desagüe

CARATTERISTICHE TECNICHE - TECHNICAL DATA - CARACTERISTIQUES TECHNIQUES - TECHNISCHE EIGENSCHAFTEN - CARACTERÍSTICAS TÉCNICAS

Alimentazione elettrica

Electric supply

Alimentation électrique

Betriebsspannung

Alimentación eléctrica

1x230 V/50Hz

Potenza pompa lavaggio

Wash pump power

Puissance pompe de lavage

Pumpenleistung

Potencia bomba lavado

Kw 0,45
(HP 0,60)

Resistenza boiler

Boiler element

Puissance résistance surchauffeur

Heizleistung Boiler

Potencia resistencia boiler

W 2700

Resistenza vasca

Tank element

Puissance résistance cuve

Heizleistung Wanne

Potencia resistencia cuba

W 1800

Potenza massima assorbita

Total power rating

Puissance maximale

Max Stromaufnahme

Potencia máxima

W 3150

Capacità vasca

Wash tank capacity

Capacité cuve

Wanneninhalt

Capacidad cuba

lt. 14

Capacità boiler

Boiler capacity

Capacité surchauffeur

Boilerinhalt

Capacidad boiler

lt. 5,5

Temperatura lavaggio/risciacquo

Wash-rinse temperature

Température lavage-rinçage

Spül-Nachspültemperatur

Temperatura lavado-aclarado

55° / 85°

Durata ciclo

Cycle time

Durée du cycle

Spülzyklusdauer

Duración ciclo

120 sec.

Cicli ora

Cycles/hour up to

Cycles par heure

Körbe pro Stunde

Ciclos/h

30

Pressione alimentazione

Required water pressure

Pression alimentation

Wasserzulaufdruck

Presión alimentación

bar 2 ÷ 4

Ø tubo di carico/scarico

Water supply hose/drain hose

Diamètre tuyau d'entrée/de vidange

Einfühschlauch/Abflussschlauch

Ø tubo de carga/de desagüe

3/4" / 25

Acqua alimentazione

Supply water

Eau d'alimentation

Anschlusstemp

Agua de alimentación

Max 50°C

Livello rumorosità

Noise emission

Émission sonore

Arbeitsplatzbezogener emissionswert

Emisión de ruidos

< 60 dBA

Peso netto

Net Weight

Poids net

Netto Gewicht

Peso neto

Kg 36