

Modular Flake-Ice Machine up to 120 Kg



PS plastic
top cover



Electronic Controls



Stainless Steel



MF 26+SB193
(sold separately)



MF 26+SB322
(sold separately)



MF 26+SB393+Top
(sold separately)



MF 26+SB530+Top
(sold separately)



MF 26+SB550+Top
(sold separately)



MF 26+RBC Stand
(sold separately)



MF 26+SIS300
(sold separately)



MF 26+SIS700
(sold separately)

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions



Features

- Modular Flake-ice machine, production up to 120 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in PS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, with 25% residual water content, hence very rich in moisture.
- CFC-free R 134a Refrigerant

MF 26 Technologies



		24h		21°: 15°C		
		10°: 10°C	10°: 10°C	21°: 15°C	21°: 15°C	
MF 26 AS		[kg]	[lbs]	[kg]	[lbs]	[WxDxH mm] 564x536x531
MF 26 WS		120	264	110	242	[WxDxH inches] 22 3/16" x 21 1/8" x 20 7/8"
						 [v/Hz/ph] 230/50/1 R 134 a



Residual water content 25%


Ice in its most natural form, made at a temperature just below zero degrees Celsius, with 25% residual water content, making it very moist.
Its flake shape makes it extremely versatile and very simple to use effectively.

www.scotsman-ice.it
www.scotsman-ice.com

Certified ISO 9001

Models and specifications are subject to change without notice.

Modular Flake-Ice Machine up to 120 Kg

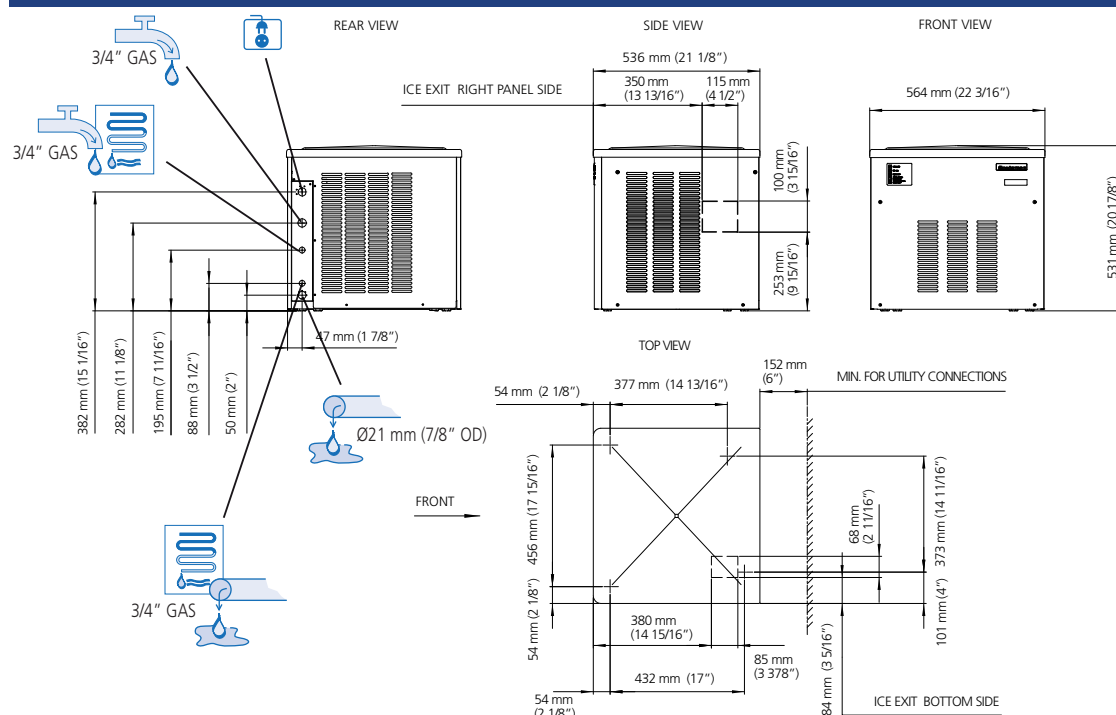

MF 26 AIR COOLED

°F \ °C	50° 10°	60° 15°	70° 21°	90° 32°	
10°	120	116	112	104	kg
50°	264	256	247	229	lbs
21°	114	110	106	98	kg
70°	251	242	234	216	lbs
32°	103	99	95	87	kg
90°	227	218	209	192	lbs
38°	96	92	88	80	kg
100	212	203	194	176	lbs



MF 26 WATER COOLED

°F \ °C	50° 10°	60° 15°	70° 21°	90° 32°	
10°	120	116	112	104	kg
50°	264	256	247	229	lbs
21°	110	106	102	94	kg
70°	242	234	225	207	lbs
32°	105	101	97	89	kg
90°	231	223	214	196	lbs
38°	103	99	95	87	kg
100	227	218	209	192	lbs



Minimum

10°C (50°F)



Maximum

40°C (104°F)

5°C (41°F)



35°C (95°F)

-10%



+10%

1 BAR

14 psi



5 BAR

70 psi

		[Btu/h] [W]	[Ømm²]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	[gal/h]	[kg] [lbs]	[kg] [lbs]
MF 26 AS		4090 1200	3 x 1,5	500	10 A	11.6	4,6	1	45 99	52 115
MF 26 WS		4090 1200	3 x 1,5	500	10 A	11.3	29	7,6	45 99	52 115

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
 This spec sheet is meant for commercial purpose only.
 For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
 Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg