




SALADETTE




SALADETTE SLV02 2 porte / 2 doors



SP

Senza piano con sottopiano isolante
Without worktop with insulating underlay

Dimensioni (LxPxH) / Dimensions (LxDxH):
900 x 700 x 840 mm



EKO

Coperchio in acciaio inox + piano in polietilene
Stainless steel lid + polyethylene worktop

Dimensioni (LxPxH) / Dimensions (LxDxH):
900 x 700 x 880 mm



NX

Piano in acciaio inox
Stainless steel worktop

Dimensioni (LxPxH) / Dimensions (LxDxH):
904 x 700 x 880 mm



GR

Piano in granito
Granite worktop


Dimensioni (LxPxH) / Dimensions (LxDxH):
904 x 700 x 870 mm



AL

Piano in acciaio inox con alzatina
Stainless steel worktop and splashback


Dimensioni (LxPxH) / Dimensions (LxDxH):
904 x 700 x 980 mm



VD

Piano in polietilene ed alzata in vetro dritto temperato
Polyethylene worktop and straight tempered glass

Dimensioni (LxPxH) / Dimensions (LxDxH):
900 x 700 x 1058 mm



AI

Piano in granito e alzata in acciaio inox, predisposto per 5 vaschette GN 1/6
Granite worktop and stainless steel splashback, suitable for 5 x 1/6 GN bowls

Dimensioni (LxPxH) / Dimensions (LxDxH):
904 x 700 x 1080 mm

Volume interno / Internal volume

SP / NX / GR / AL 210 Lt

EKO / VD / AI 148 Lt

Volume utile / Useful volume

SP / NX / GR / AL 73 Lt

EKO / VD / AI 53 Lt

Assorbimento all'avviamento / Starting electrical input

350 W / 1,85 A

Assorbimento a regime / Steady state electrical input

250 W / 1,5 A

Temperatura d'esercizio / Working temperature

+ 4°C / + 6 °C

Gas refrigerante / Cooling gas

R452A - R455A - **R290**


Classe climatica - Dati collaudo / Climatic class - Testing data

4 - Temperatura + 30°C / Umidità relativa 60%
4 - Temperature + 30°C / Relative humidity 60%


Alimentazione / Power supply

220 / 240 V - 1P - 50 Hz (60 Hz A richiesta / On request)

SALADETTE

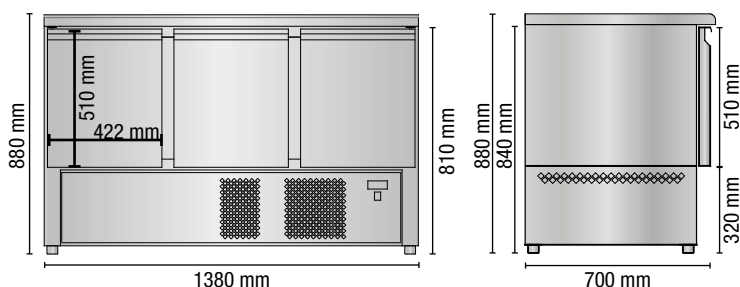


SALADETTE SLV03 3 porte / 3 doors



SP

Senza piano con sottopiano isolante
Without worktop with insulating underlay

Dimensioni (LxPxH) / Dimensions (LxDxH):
1380 x 700 x 840 mm



EKO

Coperchio in acciaio inox + piano in polietilene
Stainless steel lid + polyethylene worktop

Dimensioni (LxPxH) / Dimensions (LxDxH):
1380 x 700 x 880 mm



NX

Piano in acciaio inox
Stainless steel worktop


Dimensioni (LxPxH) / Dimensions (LxDxH):
1384 x 700 x 880 mm



GR

Piano in granito
Granite worktop


Dimensioni (LxPxH) / Dimensions (LxDxH):
1384 x 700 x 870 mm



AL

Piano in acciaio inox con alzata
Stainless steel worktop and splashback


Dimensioni (LxPxH) / Dimensions (LxDxH):
1384 x 700 x 980 mm



VD

Piano in polietilene ed alzata in vetro dritto temperato
Polyethylene worktop and straight tempered glass

Dimensioni (LxPxH) / Dimensions (LxDxH):
1380 x 700 x 1058 mm



AI

Piano in granito e alzata in acciaio inox, predisposto per 8 vaschette GN 1/6
Granite worktop and stainless steel splashback, suitable for 8 x 1/6 GN bowls

Dimensioni (LxPxH) / Dimensions (LxDxH):
1380 x 700 x 1080 mm

Volume interno / Internal volume

SP / NX / GR / AL 330 Lt

EKO / VD / AI 229 Lt

Volume utile / Useful volume

SP / NX / GR / AL 146 Lt

EKO / VD / AI 106 Lt

Assorbimento all'avviamento / Starting electrical input

350 W / 1,76 A

Assorbimento a regime / Steady state electrical input

250 W / 1,59 A

Temperatura d'esercizio / Working temperature

+ 4 °C / + 6 °C

Gas refrigerante / Cooling gas

R452A - R455A - **R290**

Classe climatica - Dati collaudo / Climatic class - Testing data


4 - Temperatura + 30 °C / Umidità relativa 60%
4 - Temperature + 30 °C / Relative humidity 60%

Alimentazione / Power supply

220 / 240 V - 1P - 50 Hz (60 Hz A richiesta / On request)


SALADETTE PIZZA

PIZZA SALADETTE

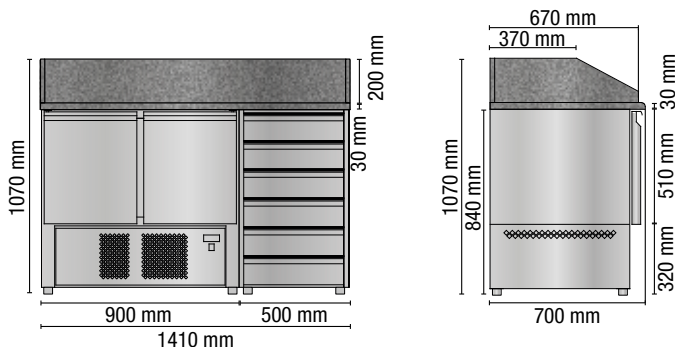


SALADETTE PIZZA / PIZZA SALADETTE SLV02C6

2 porte + 6 cassetti / 2 doors + 6 drawers

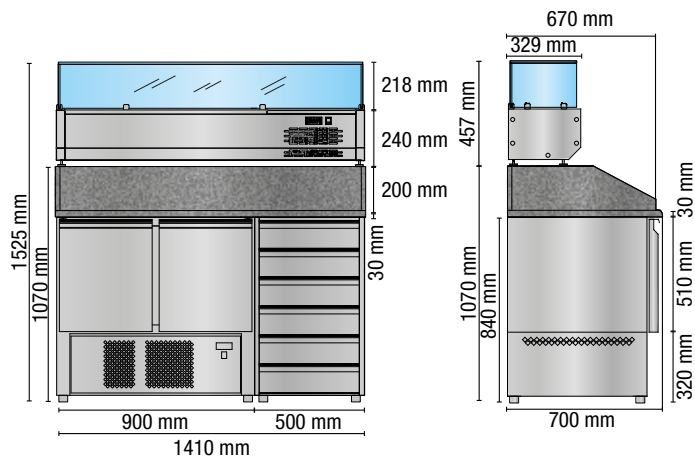


SALADETTE PIZZA / PIZZA SALADETTE SLV02C6 + VR4140VD

2 porte + 6 cassetti + **VR4140VD** vetrina refrigerata ingredienti pizza / 2 doors + 6 drawers + **VR4140VD** refrigerated display for pizza ingredients



SALADETTE PIZZA con piano e alzatine in granito.
PIZZA SALADETTE with granite worktop and splashbacks.

Dimensioni (LxPxH) / Dimensions (LxDxH):
1410 x 700 x 1070 mm



SALADETTE PIZZA con piano e alzatine in granito + vetrina refrigerata ingredienti pizza, **VD** vetri dritti temperati.
PIZZA SALADETTE with granite worktop and splashbacks + refrigerated display for pizza ingredients, with **VD** straight tempered glass.

Dimensioni (LxPxH) / Dimensions (LxDxH):
1410 x 700 x 1525 mm

VR4140VD


Cod. Vetrina refrigerata ingredienti pizza.
Cod. Refrigerated display for pizza ingredients.

Volume interno / Internal volume	210 Lt *	
Volume utile / Useful volume	73 Lt *	
Assorbimento all'avviamento / Starting electrical input	Saladette: 350 W / 1,85 A	VR4140VD : 260 W / 1,52 A
Assorbimento a regime / Steady state electrical input	Saladette: 250 W / 1,5 A	VR4140VD : 220 W / 1,40 A
Temperatura d'esercizio / Working temperature	+ 4°C / + 6 °C	
Gas refrigerante / Cooling gas	R452A - R455A - R290 (A richiesta / On request)	
Classe climatica - Dati collaudo / Climatic class - Testing data	4 - Temperatura + 30°C / Umidità relativa 60% 4 - Temperature + 30°C / Relative humidity 60%	
Alimentazione / Power supply	220 / 240 V - 1P - 50 Hz (60 Hz A richiesta / On request)	

* IL VOLUME NON COMPRENDE LA CASSETTIERA 6 CASSETTI / VOLUME DOES NOT INCLUDE THE 6-DRAWER CHEST OF DRAWERS

SALADETTE PIZZA


PIZZA SALADETTE

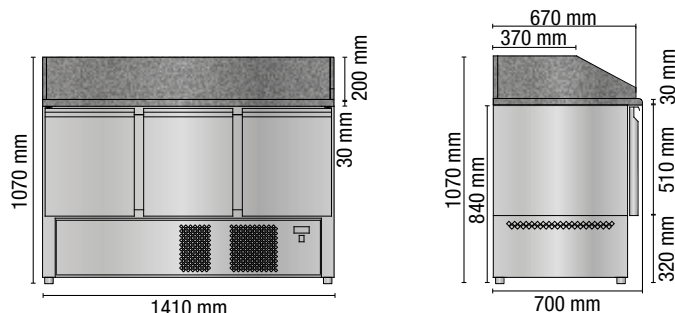

SALADETTE PIZZA / PIZZA SALADETTE

SLV03PZ


3 porte / 3 doors

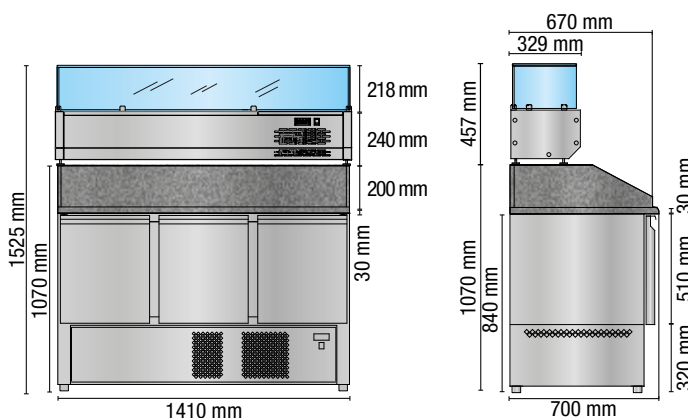

SALADETTE PIZZA / PIZZA SALADETTE


SLV03PZ + VR4140VD

3 porte + **VR4140VD** vetrina refrigerata ingredienti pizza / 3 doors + **VR4140VD** refrigerated display for pizza ingredients



SALADETTE PIZZA con piano e alzatine in granito.
Pizza SALADETTE with granite worktop and splashbacks.

Dimensioni (LxPxH) / Dimensions (LxDxH):
1410 x 700 x 1070 mm



SALADETTE PIZZA con piano e alzatine in granito + vetrina refrigerata ingredienti pizza, **VD** vetri dritti temperati.
PIZZA SALADETTE with granite worktop and splashbacks + refrigerated display for pizza ingredients, with **VD** straight tempered glass.

Dimensioni (LxPxH) / Dimensions (LxDxH):
1410 x 700 x 1525 mm


VR4140VD

Cod. Vetrina refrigerata ingredienti pizza.
Cod. Refrigerated display for pizza ingredients.

Volume interno / Internal volume	350 Lt	
Volume utile / Useful volume	250 Lt	
Assorbimento all'avviamento / Starting electrical input	Saladette: 350 W / 1,76 A	VR4140VD : 260 W / 1,52 A
Assorbimento a regime / Steady state electrical input	Saladette: 250 W / 1,59 A	VR4140VD : 220 W / 1,40 A
Temperatura d'esercizio / Working temperature	+ 4°C / + 6 °C	
Gas refrigerante / Cooling gas	R452A - R455A - R290 (A richiesta / On request)	
Classe climatica - Dati collaudo / Climatic class - Testing data	4 - Temperatura + 30°C / Umidità relativa 60% 4 - Temperature + 30°C / Relative humidity 60%	
Alimentazione / Power supply	220 / 240 V - 1P - 50 Hz (60 Hz A richiesta / On request)	


SALADETTE PIZZA

PIZZA SALADETTE

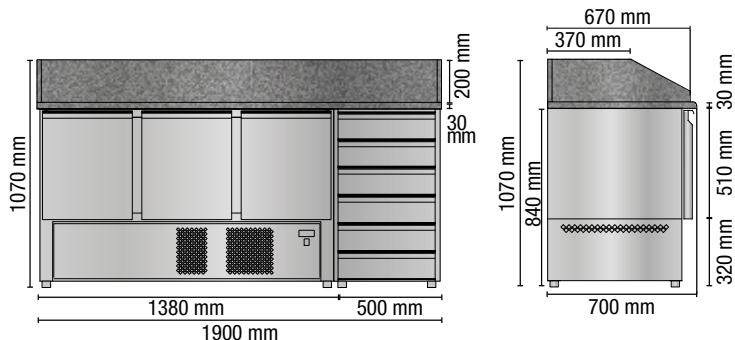


SALADETTE PIZZA / PIZZA SALADETTE SLV03C6

3 porte + 6 cassetti / 3 doors + 6 drawers

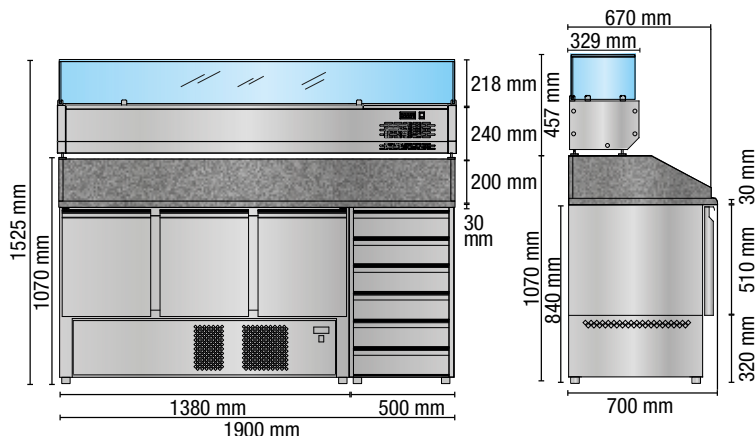


SALADETTE PIZZA / PIZZA SALADETTE SLV03C6 + VR4190VD

3 porte + 6 cassetti + **VR4190VD** vetrina refrigerata ingredienti pizza / 3 doors + 6 drawers + **VR4190VD** refrigerated display for pizza ingredients

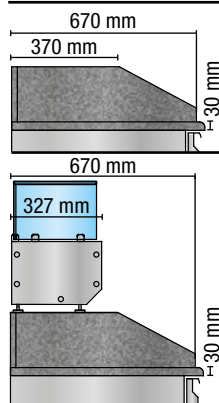

SALADETTE PIZZA con piano e alzatine in granito.
PIZZA SALADETTE with granite worktop and splashbacks.

Dimensioni (LxPxH) / Dimensions (LxDxH):
1900 x 700 x 1070 mm



SALADETTE PIZZA con piano e alzatine in granito + vetrina refrigerata ingredienti pizza, **VD** vetri dritti temperati.
PIZZA SALADETTE with granite worktop and splashbacks + refrigerated display for pizza ingredients, with **VD** straight tempered glass.

Dimensioni (LxPxH) / Dimensions (LxDxH):
1900 x 700 x 1525 mm

VR4190VD

Cod. Vetrina refrigerata ingredienti pizza.

Cod. Refrigerated display for pizza ingredients.

Volume interno / Internal volume

330 Lt



Volume utile / Useful volume

146 Lt



Assorbimento all'avviamento / Starting electrical input

Saladette: 350 W / 1,76 A

VR4190VD: 260 W / 1,52 A

Assorbimento a regime / Steady state electrical input

Saladette: 250 W / 1,59 A

VR4190VD: 220 W / 1,40 A

Temperatura d'esercizio / Working temperature

+ 4°C / + 6 °C

Gas refrigerante / Cooling gas

R452A - R455A - **R290** (A richiesta / On request)

Classe climatica - Dati collaudo / Climatic class - Testing data

4 - Temperatura + 30°C / Umidità relativa 60%
4 - Temperature + 30°C / Relative humidity 60%

Alimentazione / Power supply

220 / 240 V - 1P - 50 Hz (60 Hz A richiesta / On request)



IL VOLUME NON COMPRENDE LA CASSETTIERA 6 CASSETTI / VOLUME DOES NOT INCLUDE THE 6-DRAWER CHEST OF DRAWERS