



**Self-contained ice maker - Paddle system**  
**Daily production up to 56 kg**

[illegible]

► Position n°



## ► Features & Plus


- Hollow cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- FDA approved -ABS water basin
- Basin tipping safety system
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- Standard and special voltages
- HFC Free



AISI 304 SS Scotch  
Brite finish



Removable and cleanable air filter




FDA approved - ABS  
water basin



Disappearing insulated door

► Available ice cube size



► Prod. 24h

|                                                                                     |           |       |             |       |    |     |
|-------------------------------------------------------------------------------------|-----------|-------|-------------|-------|----|-----|
|  | Air temp. |       | Water temp. |       | kg | lbs |
|                                                                                     | 10° C     | 50° F | 7° C        | 45° F | 56 | 123 |
|                                                                                     | 21° C     | 70° F | 15° C       | 60° F | 46 | 101 |

**2 Years Warranty**  
subject to limitations

► **Certifications available for this model**






Ice Finger

# IMF 58 HC



## Self-contained ice maker - Paddle system Daily production up to 56 kg

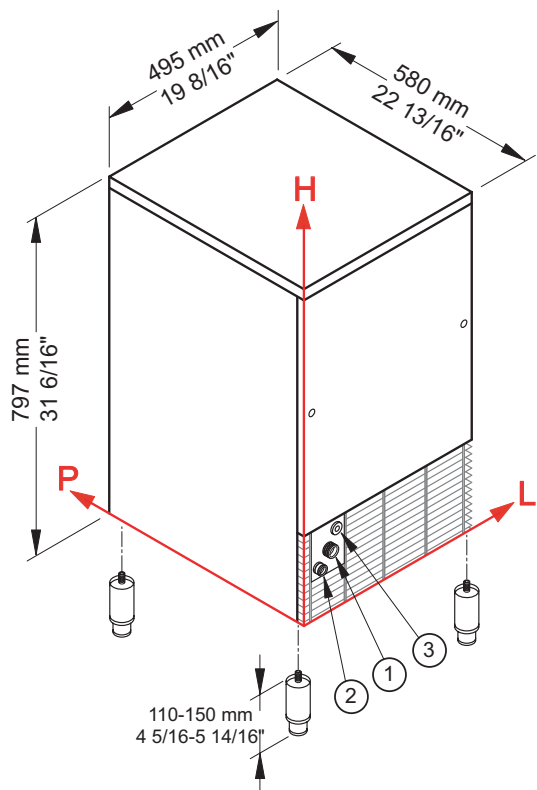

### ► Working conditions

- Location: Indoor

|                      | Min             | Max             |
|----------------------|-----------------|-----------------|
| Ambient temperature  | +10° C / +50° F | +43° C / 110° F |
| Water temperature    | +3° C / +37° F  | +32° C / +90° F |
| Voltage              | -10%            | +10%            |
| Water inlet pressure | 1bar (14 psi)   | 6bar (84 psi)   |

### ► Performances

|                 |       | Water temperature |         |       |         |       |        |
|-----------------|-------|-------------------|---------|-------|---------|-------|--------|
|                 |       | 7° C              | 45° F   | 15° C | 60° F   | 21° C | 70° F  |
|                 |       |                   |         |       |         |       |        |
| Air temperature | 10° C | 56 kg             |         |       |         |       |        |
|                 | 50° F |                   | 123 lbs |       |         |       |        |
|                 | 21° C |                   |         | 46 kg |         |       |        |
|                 | 70° F |                   |         |       | 101 lbs |       |        |
|                 | 32° C |                   |         |       |         | 34 kg |        |
|                 | 90° F |                   |         |       |         |       | 75 lbs |

### ► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 111 mm / 4 6/16" - 196 mm / 7 11/16" - 3/4"      ② Water out.: 49 mm / 1 15/16" - 151 mm / 5 15/16" - 24 mm / 15/16"
- ③ Electrical connections: 156 mm / 6 2/16" - 232 mm / 9 2/16"

### ► Technical information

|                           |                   |
|---------------------------|-------------------|
| Production in 24h         | 46 kg / 101 lbs   |
| Store capacity, up to     | 20 kg / 44 lbs    |
| Cooling system            | A - W             |
| Kind of cube              | A-20g             |
| Refrigerant               | R290              |
| Standard voltage          | 220-240 V ~ 50 Hz |
| Average power consumption | 315 W             |
| Fuse                      | 10 A              |
| Electrical consumption    | 21 kWh/100kg      |

|                            |                                        |
|----------------------------|----------------------------------------|
| Water consumption          | A: 4 l/kg - 48 gal/100 lbs             |
|                            | W: 13 l/kg - 156 gal/100 lbs           |
| Sizes (L-P-H mm)           | 495 - 580 - 797                        |
| (L-P-H in)                 | 19 8/16 - 22 13/16 - 31 6/16           |
| Sizes with pack (L-P-H mm) | 550 - 630 - 990                        |
| (L-P-H in)                 | 21 10/16 - 24 13/16 - 39               |
| Net weight                 | 54 kg / 119 lbs                        |
| Gross weight               | 62 kg / 137 lbs                        |
| Finish                     | AISI 304 stainless steel, scotch brite |

All the technical information must be considered at the following conditions:

Sizes without feet  
Standard Cube (20 g)  
Ambient temperature +21° C  
Water temperature +15° C  
Electrical consumption at +32° C (standard voltage)  
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued March 2021



[www.bremaice.it](http://www.bremaice.it)  
[info@bremaicegroup.it](mailto:info@bremaicegroup.it)

We are Brema

