

MXG 637

XSafe EcoX

Modular Ice Machine 300 kg

Item
Project
Quantity

					FEATURES • Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition. • Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference. • Electronic control board with self diagnostic and malfunction alarms. • External indicator lights: keeps ice maker's operations under constant surveillance. • Front access condenser air filter, removable and washable (air cooled version only). • Clean alert: advises with a blink when it's time to clean the filter. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.		
 MXG M Medium Gourmet 20 g Ø 30 mm - H 34 mm					CONDENSING SYSTEM air cooled	RECOMMENDED BIN	
						BIN	KG
						SB393	181
					VOLTAGE V/HZ/PH 230\50\1		
Model	Cube	Ø	H	Weight			
MXG M	Medium	30 mm	34 mm	20 g			
CERTIFICATIONS 					OPERATING REQUIREMENTS		
						Minimum	Maximum
					Air temperature	10	43
					Water temperature	5	38
					Water pressure	1 bar (14 psi)	5 bar (70 psi)
					Electrical voltage	-10%	+10%
IMPORTANT NOTICE Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.					www.scotsman-ice.it www.scotsman-ice.com		

Modular Ice Machine 300 kg

MXG 637

XSafe EcoX


Modular Ice Machine 300 kg

Scotsman®

Ice Systems

Item
Project
Quantity

Modular Ice Machine 300 kg

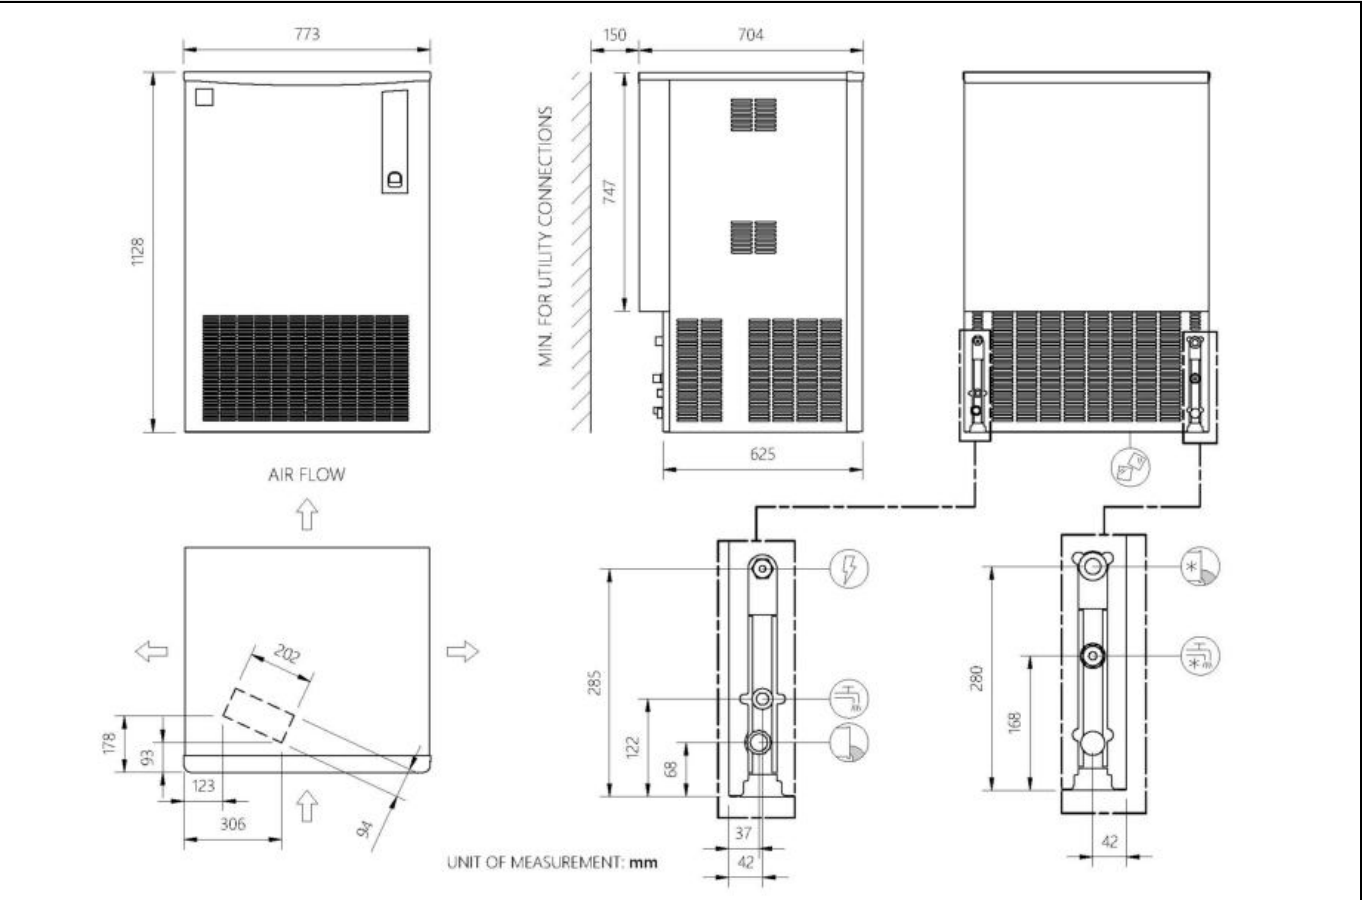

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)								
Net weight			Gross weight								
773 x 705 x 1.128 mm			x x mm								
kg			kg								
			24 h ice production kg			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
			C Amb. / °C Water								
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm2	A
			kg	kg	kg						
MXG M 637 AS	230\50\1	A	300	275	215	5	47	32	2.500	3 x 2,5	16