

Other models in this range:
MAR76 - MAR106 - MAR 126
MAR 206 - MAR 306
Split versions:
MAR 78 - MAR 128 - MAR 208
MAR 308

Scale Ice Maker Units up to 426 Kg



ABS Ice Chute Covermar: sold separately.



Gear box protection (hall effect)



Easy to remove water sump



Pulleys & belt system allows to modify ice thickness



MAR 56+RBCSTAND (sold separately)



MAR 56+UBH1100 (sold separately)



MAR 56+UBH1600 (sold separately)



MAR 56+SIS300 (sold separately)



MAR 56+ITS700 (sold separately)

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions



Features

- Modular scale ice machine, production up to 426 Kg in 24h (@ 1 mm. ice thickness)
- Scale ice machine, in "compact system" version; built-in unit
- Storage bin not supplied, to be purchased separately
- AISI304 Stainless steel evaporator and ice scraper blade
- Redesigned evaporator compartment end-walls
- Foodgrade ABS plastic water sump tray, easy remove for cleaning and sanitising
- Electromechanical control panel
- Electrical protections, rotation speed & reverse phase controls
- Low- water sensor protection
- Hermetic compressor
- Choice of air or water cooled condenser
- Drive motor / gear reducer with V-Belt drive
- Storage bin thermostatic ice level sensor
- Stainless steel panels in scotch-brite finish, with rounded corners, easy to remove for maintenance
- ON/OFF manual switch, with weekly programmable timer

Accessories & Optional Features (to be specified upon order):

- Ice spout cover
- Ice chute extension 90cm
- Double ice chute 65cm
- Infrared ice sensor (replaces the thermostatic ice level control)
- UV lamp water sanitising system for bacterial control
- Stainless steel panels kit

MAR 56 Technologies



		 24h	 THICK ICE		 THIN ICE		 10°C 50°F 10°C 50°F	 H D W [WxDxH mm] 906x813x1125 [WxDxH inches] 35 11/16 x 32 x 44 5/8
			 2 mm	 1 mm				
MAR 56 AS		380	838	426	939	 [v/Hz/ph] 400/50/3N R 404 A		
MAR 56 WS		380	838	426	939			



Humidity 2%

Ice scales are the coldest form of ice. Formed at -6° to -12°Celsius, they are very dry, containing less than 2% residual water. Scales look like fragments of glass, have an irregular shape and a thickness that can be adjusted at 1 or 2 mm.



www.scotsman-ice.it
www.scotsman-ice.com

Certified ISO 9001

Models and specifications are subject to change without notice.

Other models in this range:
MAR76 - MAR106 - MAR 126
MAR 206 - MAR 306
Split versions:
MAR 78 - MAR 128 - MAR 208- MAR 308

Scale Ice Maker Units up to 426 kg

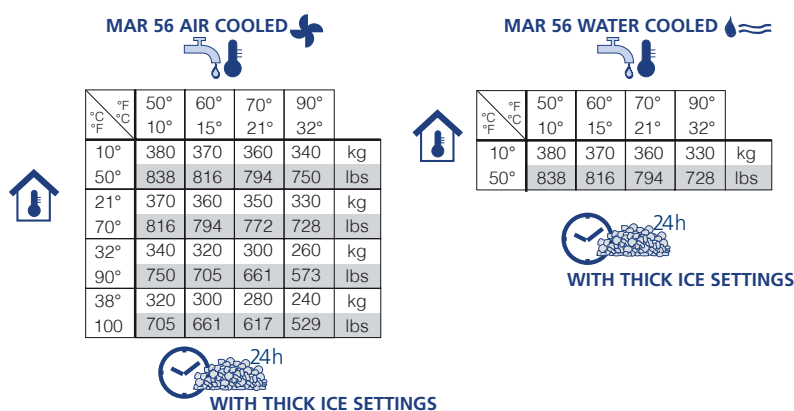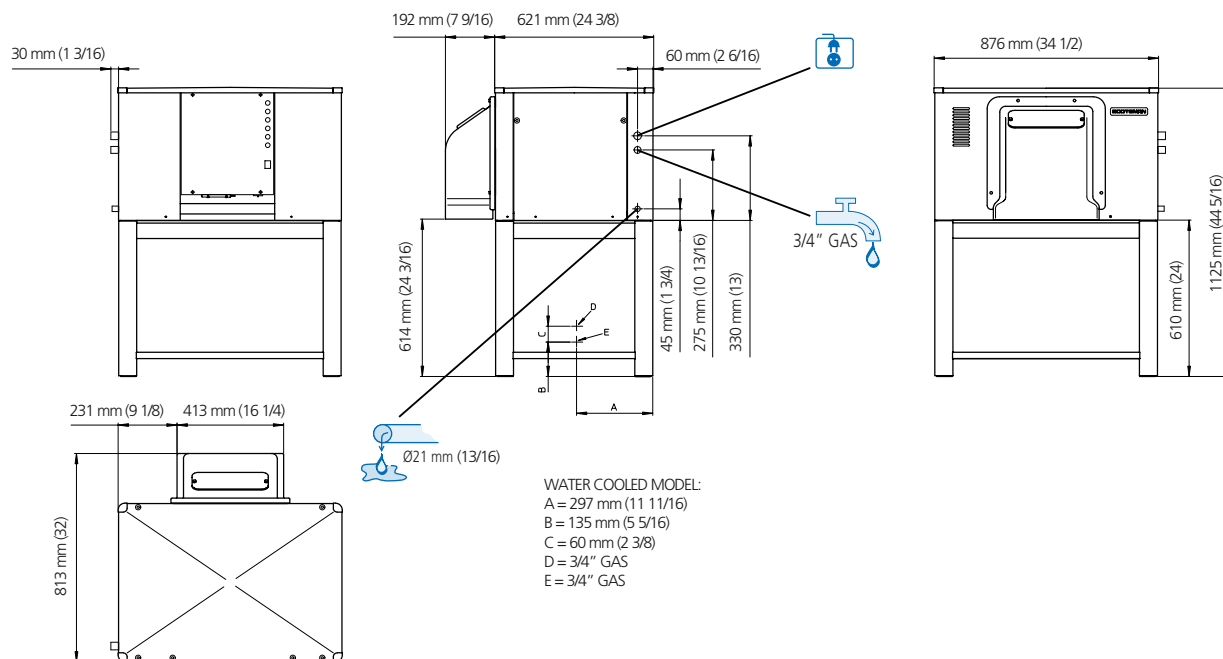

 Minimum	 Normal	 Maximum
10°C (50°F)	 15°C (60°F)	40°C (104°F)
5°C (41°F)	 20°C (68°F)	35°C (95°F)
-10%	 0%	+10%
1 BAR 14 psi	 2 BAR 29 psi	5 BAR 70 psi

	 +C° -C° Standard TE (T cond.+54,5°C - T evap.-23,3°C)				 100 Kg	 32°C 90°F 21°C 70°F						
	[W]	[Btu/h]	[Ø mm²] [AWG]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	[gal/h]	[kg]	[lbs]	[kg]	[lbs]
MAR 56 AS		1570 5360	5X1,5 AWG15	2200	16 A	17,6	12,5	3,3	177 390	194 427		
MAR 56 VVS		1570 5360	5X1,5 AWG15	2200	16 A	14,6	270	71,3	174 383	191 420		

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg