

Modular Ice Machine 200 kg

Item #:

Project:

Quantity:

		FEATURES • Produces Flake Ice, extruded at a temperature just below 0°C, with 25% residual water content, hence very rich in moisture. • Stainless steel “scotch-brite” finish; rounded corners for enhanced aesthetics and ergonomics; top cover in PS plastic. • Removable side panels on all four sides to aid routine maintenance and servicing. • Sturdy evaporator in stainless steel AISI304, auger in AISI430. • State of the art ice Breaker in special alloy. • Reduced-maintenance, self-lubricating gear-reducer. • Oversized hermetic compressor. • Electronic control board with self diagnostic and malfunction alarms. • XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.			
 MF 37 Flake ice Residual water content 25%	CONDENSING SYSTEM Air cooled Water cooled	RECOMMENDED BINS			
	REFRIGERANT GAS R290	Head	Bins		kg
		MF 37	✓	SB193	129
			✓	SB322	168
			CBT30EFSD	SB393	181
			CBT30EFSD	SB530	243
			CBT42EFSD	SB550	252
			CBT48FMCD	SB948	406
			●	SIS300	137 + 73
	●		SIS700	137 + 73	
VOLTAGE V/Hz/ph 230/50/1	LEGEND: ✓ : Perfect combination between ice maker and bin ● : Ice chute cut-out performed upon installation CBTxxxxxxxx : need additional bin top				
CERTIFICATIONS 		OPERATING REQUIREMENTS			
	Minimum		Maximum		
Air temperature	10		43		
Water temperature	5		38		
Water pressure	1 bar (14 psi)		5 bar (70 psi)		
Electrical voltage	-10%		+10%		
IMPORTANT NOTICE: Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.				www.scotsman-ice.it www.scotsman-ice.com	

Modular Ice Machine 200 kg

MF 37

EcoX


XSafe

Modular Ice Machine 200 kg

Item #:

Project:

Quantity:

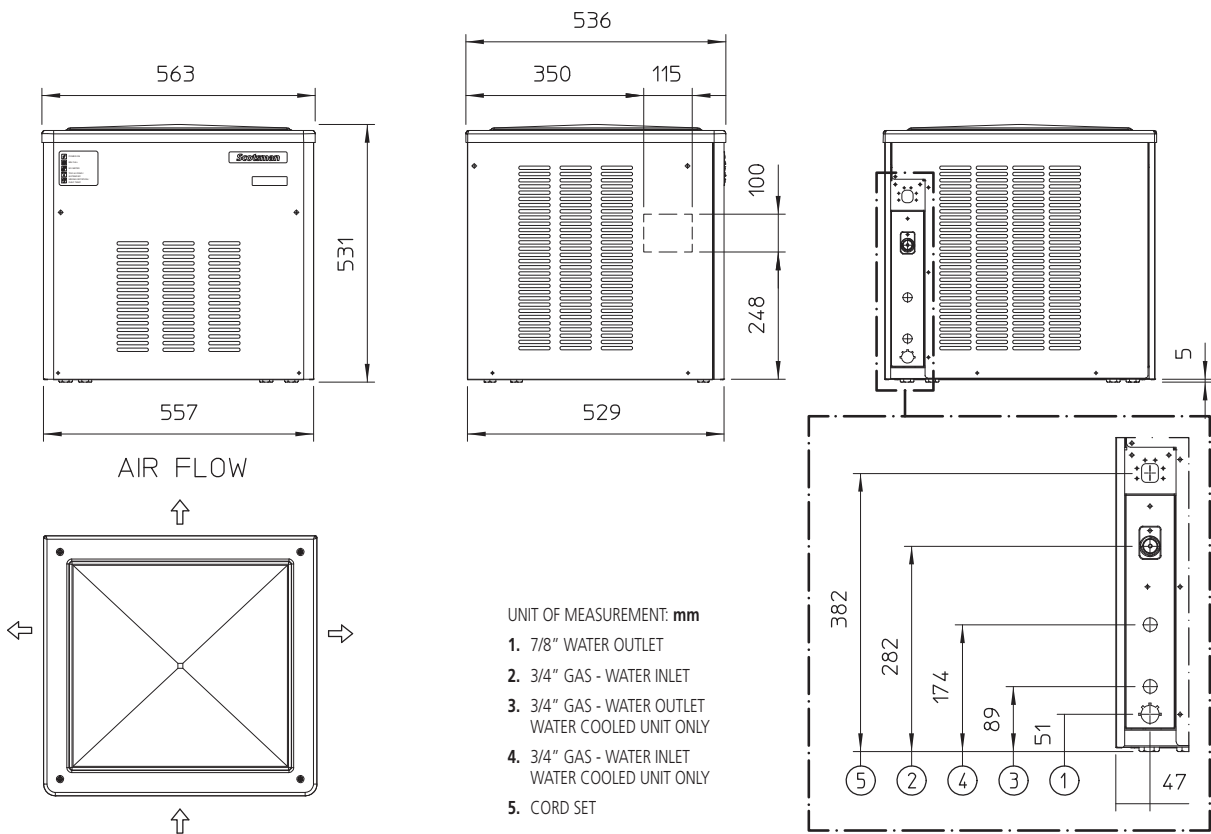

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		563 x 536 x 531 mm		Carton (W x D x H)		630 x 610 x 680 mm					
Net weight		49 kg		Weight		56 kg					
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W	W	No. x Ømm²	A
MF 37 AS	230/50/1	200	199	170	8.5	15.2	7.4	695	1955	3 x 1.5	10