



FABRICANTES DE
MOLINOS DE CAFÉ

MANUFACTURERS
OF COFFEE GRINDERS

Molino de café profesional
para todo tipo de cafés

Professional coffee grinder
for all types of coffee.

TECHNICAL CHARACTERISTICS 0-500g/3' Max 4Kg

VOLTAGE: 230V / 220V / 110V

FREQUENCY: 50Hz / 60Hz

PHASES: 1 (monophase)

RPM: 1.300 / 1.600

CURRENT: 2,1A / 4,7A

CAPACITOR: 14nf / 55nf

POWER: 0,37Hp / 497W

PROTECTION RATING: IP21

MOTOR SUPPLIED WITH THERMAL PROTECTOR

MAXIMUM OPERATING TIME: 30min.

TEMPERED STEEL GRINDING WHEELS,(62HRc) ø 65mm

LIFESPAN OF GRINDING WHEELS: 500Kg

HOPPER CAPACITY: 1Kg

HOPPER OPTION: 2Kg

MULTI-LANGUAGE TOUCH SCREEN

SELECTION OF 1 OR 2 INSTANT GROUND COFFEE OR CONTINUOUS GROUND
COFFEE COUNTER PARTIAL OR TOTAL

ASSISTANT TIMER OF THE GRINDING POINT

DIMENSIONS WIDTH x LENGTH x HEIGHT: 285X405X625mm


WEIGHT: 17,5Kg

AIR NOISE: 55dB

Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel
(62HRC) ø 65mm.

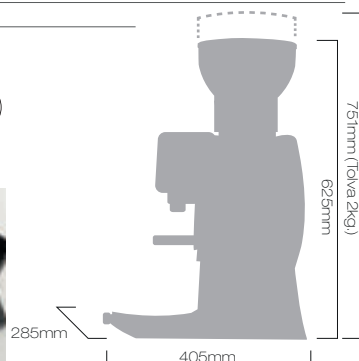


GREY METALLIC
SILVER

SNOW WHITE

CHROME SILVER

CHROME GOLD.

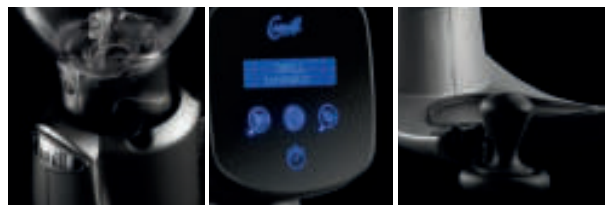

MAIN ATTRIBUTES

Hopper (1kg) made of unbreakable and non-deformable material (co.poliéster), with fast lock system and self-leveling when off the coffee grinder with the possibility of cleaning in a dishwasher at 90°C. – Micrometric regulation of the coffee grind using a regulatory pawl. – New expulsion system for the ground coffee (always living the grinding cavity clean when the coffee grinder stops). – Touch screen for easy programming and use (Language selection - Adjustment of the grinding program for each dose – Selection of 1 dose, 2 doses or continuous grinding – Coffee counter partial or total). – Integrated coffee tamper with mobile positioner. – Aluminium bodywork made in two parts, especially designed for ventilation, with floating attachment of the inner motor body. – Bodywork finished in painted metallic silver-grey, snow white, chromed gold or chromed silver. – Motor assembly with an anti-vibration system using a pneumatic ring. – Silencer 500W motor with internal auto-ventilation, “55dB”. – Hardened steel grinding blades (62/65HRC) 65mm in diameter.

Optional: - Personalisation system with chromed plaque on the back of the grinder. – Admits hopper of 2 kg. – Titanium-coated burrs (62/63 HRC) 65mm diameter, 2.000 kg. – Red speed coated burrs (62/63 HRC) 65mm diameter, 3.000 kg.



LUXOMATIC 500W ALUMINIUM

COLLECTION ON DEMAND

55dB

