



Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
C-E711 400V 3N

19068566

04/09/2023

DENOMINATION:

Electric solid top with 4 cooking zones, with oven, 700 range.

DESCRIPTION :

"- Pressed surface tops manufactured in 1.5 mm thick AISI-304 stainless steel, with rounded edges, designed to prevent spilled liquid from pans from entering the interior of the oven.


- Stamped surface top with rounded corners for easy cleaning.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- "Solid top" model with four elements underneath the 16 mm-thick, 13CrMo4 plate, distributed so that they independently heat the four quarters of the plate. Solid-top dimensions: 720 x 455 mm.
- Power control with 7 positions for each heating element which makes it possible to work with different temperature gradients on the plate.
- 2.6 kW heating power for each heat point.
- Protection in the event of overheating of each heat source.
- Thermostat that activates the cooling fan for the electric components.
- Safety thermostat that ensures that the machine does not operate in the event of the overheating of the components.
- High-temperature enamelled cast iron flue protector.
- Access to components from the front.
- Easy connection and compliant with health standards.
- Machines with IPX5 grade water protection.

- "
- Static electric oven with dimensions GN 2/1.
 - Heating through stainless steel heating elements with selector switch for operation of the upper and/or inner part.
 - Cooking chamber made entirely of stainless steel which makes cleaning easier and ensures greater hygiene.
 - Trays are inserted sideways which improves manoeuvrability.
 - Thermostatic valve for temperature control (125 - 310 °C).
 - Rails on three height levels to offer different cooking options.
 - Rails with anti-tipping system to prevent trays from overturning.
 - Cast iron oven floor which guarantees better performance and uniform heat distribution.
 - Fibreglass closing seal to improve the thermal efficiency of the oven and ensure its durability.
 - Stamped oven frame and inner door, ensuring a better oven closure.
 - Detachable oven door to facilitate repairs."

POSSIBLE ACCESSORIES :

- KORE WHEELS
- TALL CHIMNEY KORE

DIMENSIONS



X Width	800 mm	X Gross width	840 mm
Y Depth	730 mm	Y Gross depth	822 mm
Z Height	850 mm	Z Gross height	1255 mm
Net Weight	139,0 kg	Gross Weight	157,0 kg
Net volume	0,500 m3	Gross volume	0,867 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	16,400 kW
Amperage (A)	40A
Heating power	16,40 kW
Voltage	400V - 3N
Electric frequency	50/60Hz

CONNECTIONS TECHNICAL SPECIFICATIONS

Three-phase +N 400V wiring	4X6MM2+T
----------------------------	----------





Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
C-E711 400V 3N

19068566

04/09/2023

C-E711

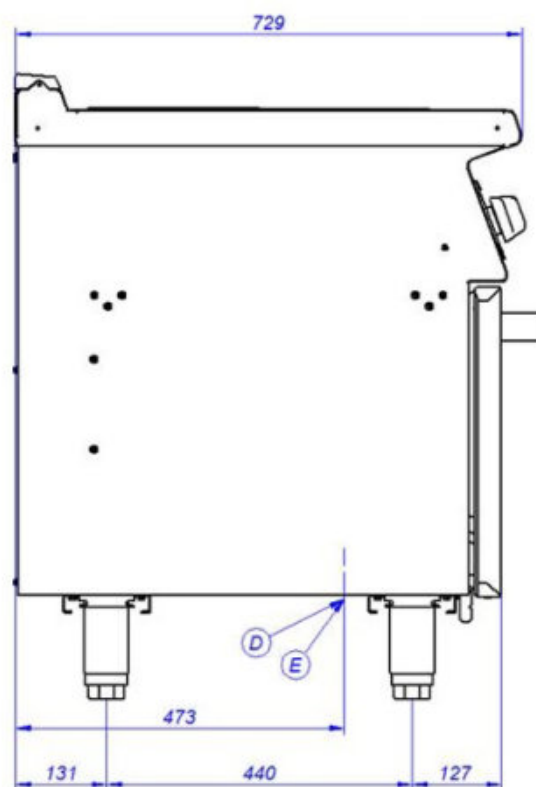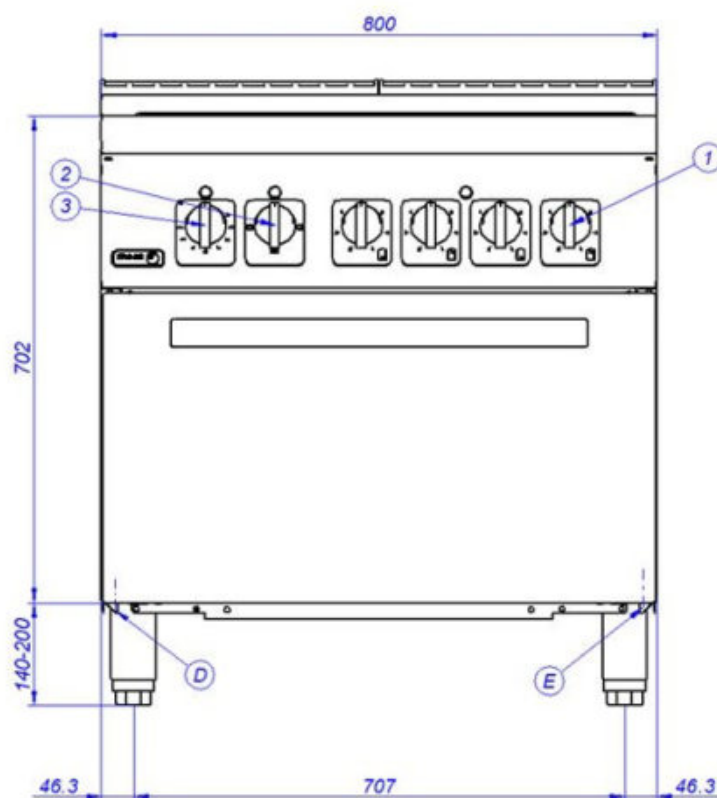

E. Conexión eléctrica
D. Desagüe
1. Mando placas M
2. Mando horno 1
3. Mando horno 2

Electrical connection
Drain
M plates control
Oven control 1
Oven control 2