

Other models in this range:
MAR 56 - MAR 76 - MAR 106
MAR 206 - MAR 306
Split versions:
MAR 78 - MAR 128 - MAR 208
MAR 308

Scale Ice Maker Units up to 1000 Kg



ABS Ice Chute Cover: sold separately.



Gear box protection (hall effect)



Easy to remove water sump



Pulleys & belt system allows to modify ice thickness



MAR 126+RBCSTAND (sold separately)



MAR 126+UBH1100 (sold separately)



MAR 126+UBH1600 (sold separately)



MAR 126+UBH2250 (sold separately)



MAR 126+SIS700 (sold separately)



MAR 126+SIS1350 (sold separately)



MAR 126+ITS2250 (sold separately)

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions



Features

- Modular scale ice machine, production up to 1000 Kg in 24h (@ 2 mm. ice thickness only)
- Scale ice machine, in "compact system" version; built-in unit
- Storage bin not supplied, to be purchased separately
- AISI304 Stainless steel evaporator and ice scraper blade
- Redesigned evaporator compartment end-walls
- Foodgrade ABS plastic water sump tray, easy remove for cleaning and sanitising
- Electromechanical control panel
- Electrical protections, rotation speed & reverse phase controls
- Low- water sensor protection
- Hermetic compressor
- Choice of air or water cooled condenser
- Drive motor / gear reducer with V-Belt drive
- Storage bin thermostatic ice level sensor
- Stainless steel panels in scotch-brite finish, with rounded corners, easy to remove for maintenance
- ON/OFF manual switch, with weekly programmable timer

Accessories & Optional Features (to be specified upon order):

- Ice spout cover
- Ice chute extension 90cm
- Double ice chute 65cm
- Infrared ice sensor (replaces the thermostatic ice level control)
- UV lamp water sanitising system for bacterial control
- Stainless steel panels kit

MAR 126 Technologies



			THICK ICE		
			[kg] [lbs]		
MAR126 AS			1000 2205		[WxDxH mm] 906x813x1125
MAR126 WS			1000 2205		[WxDxH inches] 35 11/16 x 32 x 44 5/8



Residual water content 2%

Ice scales are the coldest form of ice. Formed at -6° to -12°Celsius, they are very dry, containing less than 2% residual water. Scales look like fragments of glass, have an irregular shape and a thickness that can be adjusted at 1 or 2 mm.


www.scotsman-ice.it
www.scotsman-ice.com

Certified ISO 9001

Models and specifications are subject to change without notice.

Other models in this range:
MAR 56 - MAR 76 - MAR 106
MAR 206 - MAR 306
Split versions:
MAR 78 - MAR 128 - MAR 208
MAR 308

Scale Ice Maker Units up to 1000 Kg

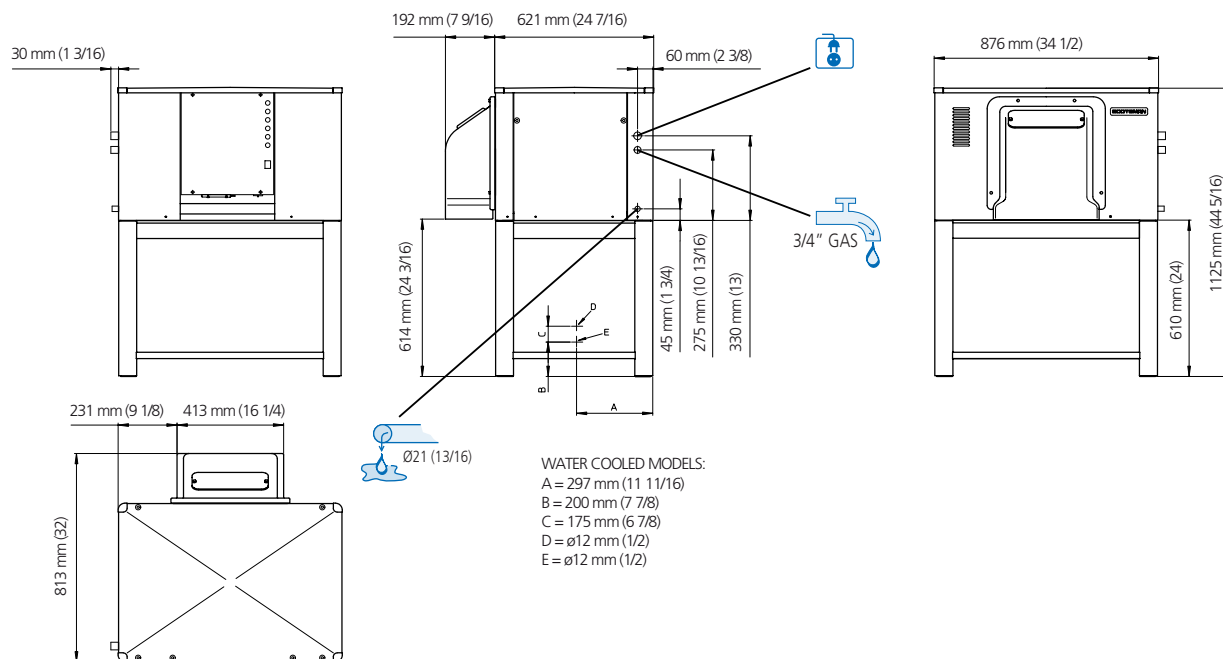

MAR 126 AS

°C \ °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	1000	980	960	920	kg
50°	2205	2160	2116	2028	lbs
21°	920	900	880	840	kg
70°	2028	1984	1940	1852	lbs
32°	820	800	780	740	kg
90°	1808	1764	1720	1631	lbs
38°	720	700	680	640	kg
100	1587	1543	1499	1411	lbs

24h
WITH THICK ICE SETTINGS ONLY

MAR 126 WS

°C \ °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	1000	980	960	920	kg
50°	2205	2160	2116	2028	lbs

24h
WITH THICK ICE SETTINGS ONLY

Minimum		Maximum	
10°C (50°F)		40°C (104°F)	
5°C (41°F)		35°C (95°F)	
-10%		+10%	
1 BAR 14 psi		5 BAR 70 psi	

	 Standard TE (T cond.+54,5°C - T evap.-23,3°C)	 [W] [Btu/h]	 [S mm²] [AWG]	 [W] FUSE	 [kWh] - 100 Kg	 [l/h] [gal/h]	 [kg] [lbs]	 [kg] [lbs]
MAR 126 AS		5515 18800	5x1,5 AWG15	4500 16 A	13,8	32,5 8,6	209 460	226 498
MAR 126 WS		5515 18800	5x1,5 AWG15	4500 16 A	11,3	n.a. n.a.	205 451	222 488

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg