

Other models in this range:
ACM 25 - AC 56 - AC 86
AC 106 - AC 126 - AC 206
AC 176 - AC 226

Self Contained Ice Machine up to 24,5 kg



Features

- Produces individual Gourmet crystal clear supercubes.
- Up to 24,5 kg (54 lb) daily ice cubes production.
- Up to 9 kg (20 lb) ice storage capacity.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front panel in & out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front panel mount ON-OFF switch.
- Ergonomically designed ice storage access, with disappearing door.
- Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- AglON antimicrobial agent embedded in moulded plastics parts.
- CFC-free R134a refrigerant.
- 3 years manufacturer warranty.



Front ON-OFF switch




Available as option KIT under code KITLEGSSOCKET



New spray system



Proximity condenser air filter

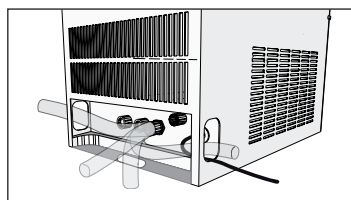


Redesigned water connections area

Technologies



		10°C : 10°C			21°C : 15°C					
		[kg]	[lb]	N°*	[kg]	[lb]	N°*	[kg]	[lb]	N°*
AC 46 AS		24,5	54	1225	22,0	48	1100	9	20	450
AC 46 WS		24,5	54	1225	22,5	49	1125	9	20	450

*Estimate number of medium size gourmet cubes.



[WxDxH mm]
386 x 600 x 645

[WxDxH inches]
15 3/16" x 23 5/8" x 25 3/8"

This product qualifies for the following listings:



Medium Gourmet 20 g
Ø 29 x H 34 mm

3 Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001:2008

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Other models in this range:
ACM 25 - AC 56 - AC 86
AC 106 - AC 126 - AC 206
AC 176 - AC 226

Self Contained Ice Machine up to 24,5 kg

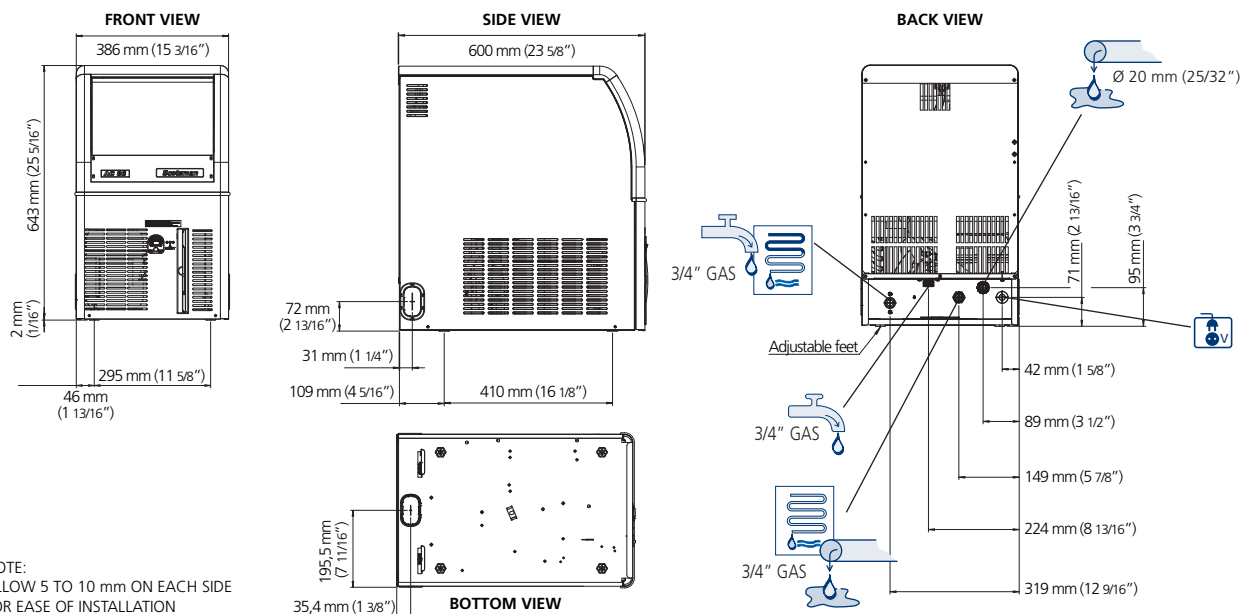

AC 46 AIR COOLED						AC 46 WATER COOLED					
		50°	60°	70°	90°			50°	60°	70°	90°
		10°	15°	21°	32°			10°	15°	21°	32°
10°	24.5	24	23.5	22.5	kg	10°	24.5	24	23.5	22.5	kg
50°	54	53	52	49	lb	50°	54	53	52	49	lb
21°	22.5	22	21.5	20.5	kg	21°	23	22.5	22	21	kg
70°	49	48	47	45	lb	70°	50	49	48	45	lb
32°	19.5	19	18.5	17.5	kg	32°	22	21.5	21	20	kg
90°	43	42	41	41	lb	90°	48	47	45	40	lb
38°	18	17.5	17	16	kg	38°	20	19.5	19	18	kg
100	39	38	37	35	lb	100	40	43	42	39	lb

Minimum	Maximum
10°C (50°F)	43°C (110°F)
5°C (41°F)	38°C (100°F)
-10%	+10%
1 bar 14 psi	5 bar 70 psi

AC 46 AS	AC 46 WS	BTU/h	W	Ømm ²	W	FUSE	[kWh] - 100 kg	[l/h]	[gal/h]	[kg]	[lb]	[kg]	[lb]
AC 46 AS	AC 46 WS	2730	800	1,5	400	10	40,8	3.2	0.84	35	77	42	93
AC 46 WS	AC 46 AS	2730	800	1,5	400	10	31,0	27.3	7.2	35	77	42	93

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg