

[illegible]

	Air temp.		Water temp.		kg	lbs
	10° C	50° F	7° C	45° F	25	55
	21° C	70° F	15° C	60° F	22	49






Ice Cube

Fresh Maker



Self-contained ice maker - Sprayer system Daily production up to 25 kg

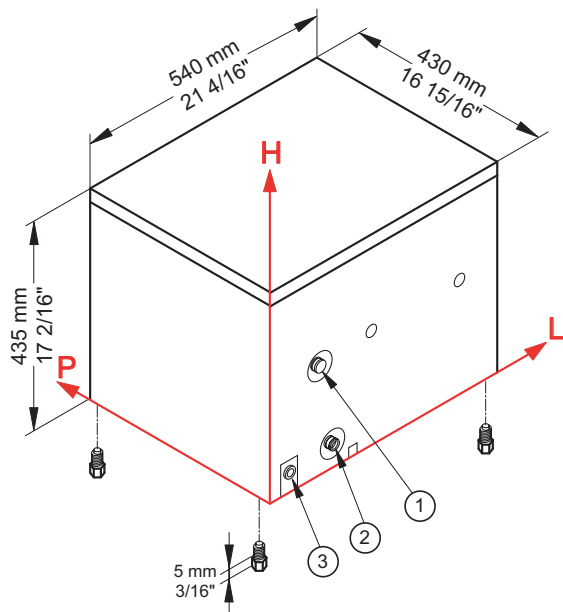

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	25 kg					
	50° F		55 lbs				
	21° C			22 kg			
	70° F				49 lbs		
	32° C					18 kg	
	90° F						40 lbs

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 120 mm / 4 12/16" - 215 mm / 8 7/16" - 3/4" ② Water out.: 150 mm / 5 14/16" - 40 mm / 1 9/16" - 24 mm / 15/16"
- ③ Electrical connections: 44 mm / 1 12/16" - 40 mm / 1 9/16"

► Technical information

Production in 24h	22 kg / 49 lbs
Store capacity, up to	4 kg / 9 lbs
Cooling system	W
Kind of cube	D-13g
Refrigerant	R404A - R452A
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	320 W
Fuse	10 A
Delivered water	1,2 l/min

Water consumption	W: 37,4 l/kg - 448,1 gal/100 lbs
Sizes (L-P-H mm)	540 - 430 - 435
(L-P-H in)	21 4/16 - 16 15/16 - 17 2/16
Sizes with pack (L-P-H mm)	590 - 490 - 640
(L-P-H in)	23 4/16 - 19 5/16 - 25 3/16
Net weight	37,5 kg / 83 lbs
Gross weight	42,5 kg / 94 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet
Standard Cube (13 g)
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)
Refrigerant R404A

Models and specifications are subject to change without notice

Rev. 03 - Issued May 2018



www.bremaice.it
info@bremaice.it

Bim + Data
download

