


Ice Flakes

GB 902A 2018



Undercounter ice maker - Granular system

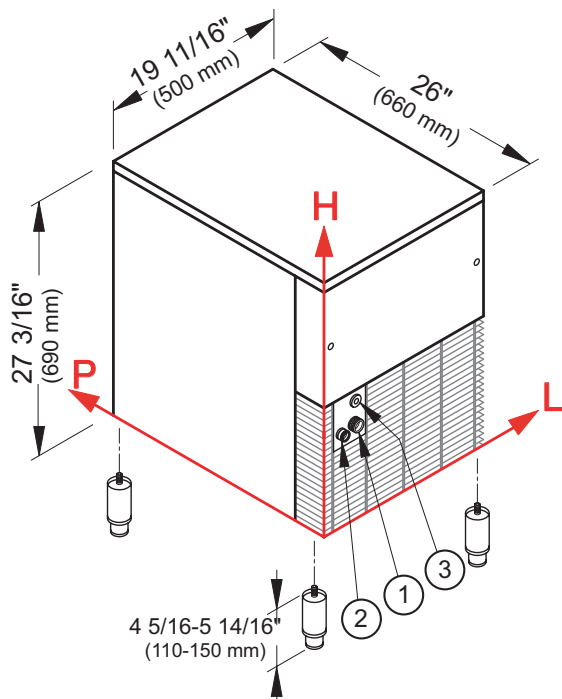

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+50° F	+110° F
Water temperature	+37° F	+90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water in.: 3 14/16 " - 6 4/16 " - 3/4 "

② Water out.: 1 14/16 " - 5 15/16 " - 15/16 "

③ Electrical connections: 3 7/16 " - 9 1/16 "

► Technical information

Production in 24h *	200 lbs
Store capacity, up to	44 lbs
Cooling system	A
Refrigerant	R404A
Standard voltage	115 V ~ 60Hz
Electrical consumption ***	550 W
Fuse	15 A

Water consumption **	12 gal/100 lbs
Sizes (L-P-H in)	19 11/16 - 26 - 27 3/16
Sizes with pack (L-P-H in)	21 10/16 - 28 6/16 - 34 10/16
Net weight	130 lbs
Gross weight	148 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet

* Production at Ambient temperature **+90° F** / Water temperature **+70° F**

** Water consumption at Ambient temperature **+70° F** / Water temperature **+60° F**

*** Electrical consumption at ambient temperature **+109° F**

Models and specifications are subject to change without notice

Rev. 01 - Issued December 2017



BREMA ICE MAKERS SPA

Via dell'Industria 10,
20020 Villa Cortese (MI), Italy

tel. +39 0331 434811
fax +39 0331 433833

www.bremaice.it
info@bremaice.it

Installation

