

Gourmet Cube Ice Machine up to 660 kg



Electronic



Condenser




MC1210 with UBH1600
(sold separately)



Features

- Produces individual Gourmet crystal clear supercubes
- Up to 660 kg (1452 lb) daily ice cubes production
- Resistant stainless steel exterior
- Computer controlled with advanced diagnostics capabilities
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-404A Refrigerant
- 2 years manufacturer warranty

MC 1210 Technologies



		10°C: 10°C						21°C: 15°C						[WxDxH mm] 1677 x 775 x 810 [WxDxH inches] 66" x 30 1/2" x 317/8"
		[kg]	[lb]	N°	[kg]	[lb]	N°	[kg]	[lb]	N°	[kg]	[lb]	N°	
MCL 1210 AS	✶	627	1380	16100	541	1193	13900							 [V/Hz/ph] 230/50/1 400/50/3N R404A
MCL 1210 WS	✶	570	1254	14600	532	1173	13600							
MCM 1210 AS	✶	660	1451	33000	570	1253	28500							
MCM 1210 WS	✶	600	1319	30000	560	1231	28000							

*Estimated number of cubes

This product qualifies for the following listings:



2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2008

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Gourmet Cube Ice Machine up to 660 kg

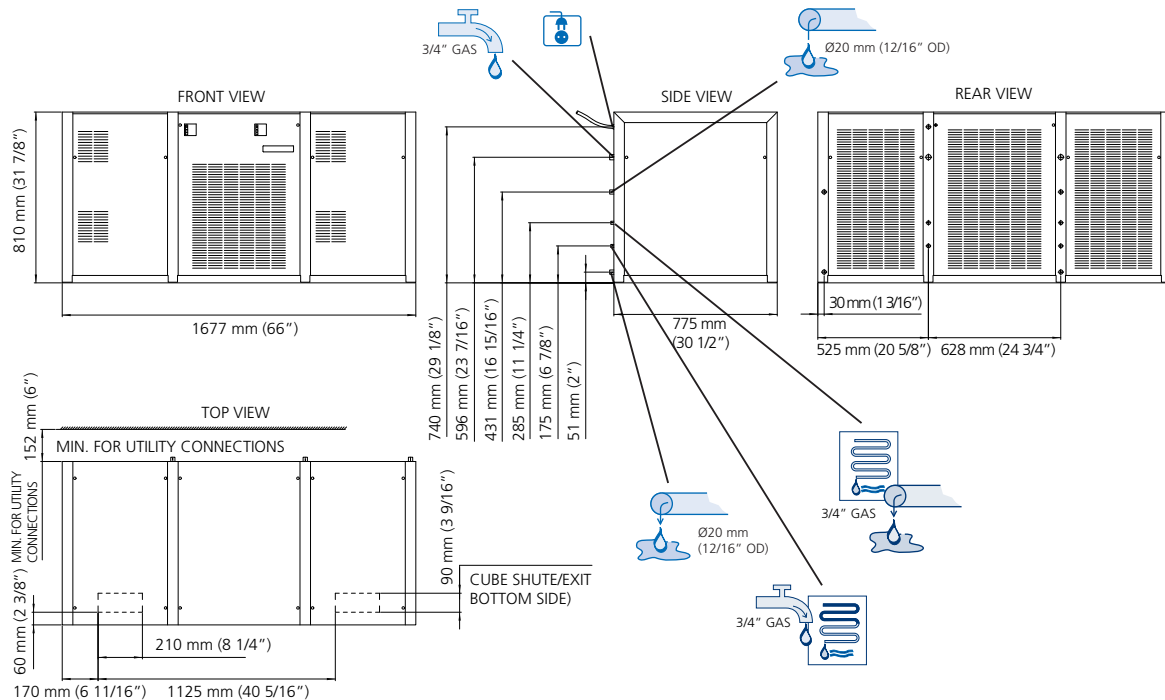

MC 1210 AIR COOLED

	50° 10°	60° 15°	70° 21°	90° 32°	
10° 50°	660 1451	645 1418	630 1385	600 1319	kg lb
21° 70°	585 1288	570 1253	555 1220	525 1154	kg lb
32° 90°	460 1011	445 978	430 945	400 879.5	kg lb
38° 100	400 880	385 846.5	370 813.5	340 747.5	kg lb

24h

MC 1210 WATER COOLED

	50° 10°	60° 15°	70° 21°	90° 32°	
10° 50°	600 1319	580 1275	560 1231	520 1143	kg lb
21° 70°	580 1275	560 1231	540 1187	500 1099	kg lb
32° 90°	560 1231	540 1187	520 1143	480 1055	kg lb
38° 100	540 1187	520 1143	500 1099	460 1011	kg lb

24h



Minimum

10°C (50°F)



Maximum

43°C (110°F)

5°C (41°F)

-10%

1 bar
14 psi

38°C (100°F)

+10%

5 bar
70 psi

	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
	MC L 1210 AS	MC L 1210 WS	MC M 1210 AS	MC M 1210 WS							
	2x26000	2x26000	2x26000	2x26000	7625	5x2,5	4800	16 A	25,7	2x26	2x6,8
	234	515	234	515	245	539	234	515	245	539	245