

Other models in this range:
MF 46 - MF 47 - MF 58 Split
MF 59 Split - MF 66 - MF 68 Split
MF 69 Split - MF 86 - MF 88 Split

Modular Super-Flake Ice Machine up to 600 Kg/24h.



Available in remote condenser version (R.C. sold separately)



Stainless Steel



PS plastic top cover



Electronic Controls



MF 56+SB193+Top
(sold separately)

MF 56+SB322+Top
(sold separately)

MF 56+SB393+Top
(sold separately)



MF 56+SB530+Top
(sold separately)

MF 56+SB550+Top
(sold separately)

MF 56+SB948+Top
(sold separately)



MF 56+SB1025+Top
(sold separately)

2xMF 56+UBH1100/UBH1600
(sold separately)

MF 56+RBCSTAND
(sold separately)



MF 56+SIS300
(sold separately)

MF 56+SIS700
(sold separately)

MF 56+SIS1350
(sold separately)

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions



Features

- Modular Superflake ice machine, production up to 600 kg in 24 hours
- Hermetic compressor
- Choice of air, water or remote air-cooled condensers
- Stainless steel auger and freezing cylinder (evaporator)
- Equipped with an electronic control board
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry)
- Long-lasting stainless steel ball-bearings
- Double protection - electronic rotation sensor and drive coupling-on gear motor and gear reducer
- Low- water sensor protection on refrigeration and gear motor system
- Optical ice level sensor for machine shut down
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics
- Side panels are removable on all four sides to ease maintenance and after-sales service operations
- PS plastic top cover
- Reduced height to ease installation
- CFC Free R-404A Refrigerant

Optional Features (special order):

- UV lamp for bacterial control
- Anti-scale, anti-algae water filtration system

MF 56 Technologies



		24h				 [WxDxH mm] 538X663X790
		10°: 10°C	21°: 15°C	[kg]	[lbs]	
MF 56 AS		600	1323	540	1190	[WxDxH inches] 213/16 x 261/8 x 311/8
MF 56 WS		600	1323	560	1234	
MF 56 ASR		600	1323	540	1190	 [v/Hz/ph] 230/50/1 also available in 230/60/1
						 R 404 A



Residual water content 15%


Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual water, making it relatively dry and compact.

www.scotsman-ice.it
www.scotsman-ice.com

Certified ISO 9001

Models and specifications are subject to change without notice.

Modular Super-Flake Ice Machine up to 600 Kg/24h.

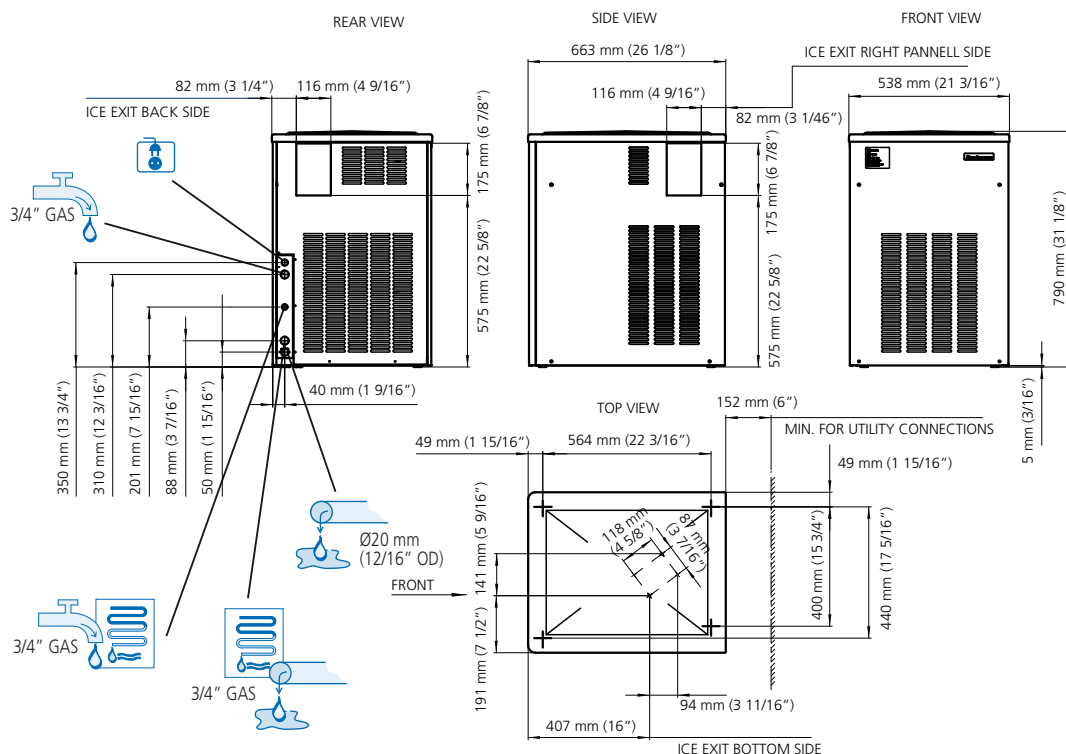

MF 56 AIR COOLED

°C / °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	600	560	520	440	kg
50°	1323	1234	1146	970	lbs
21°	580	540	500	420	kg
70°	1278	1190	1102	926	lbs
32°	500	470	440	380	kg
90°	1102	1036	970	838	lbs
38°	410	390	370	330	kg
100	904	860	816	727	lbs



(in 230/50/1 specs)

MF 56 WATER COOLED

°C / °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	600	570	540	480	kg
50°	1323	1256	1190	1058	lbs
21°	590	560	530	470	kg
70°	1300	1234	1168	1036	lbs
32°	580	550	520	460	kg
90°	1278	1212	1146	1014	lbs
38°	570	540	513	450	kg
100	1256	1190	1131	992	lbs



Minimum

10°C (50°F)

5°C (41°F)

-10%

1 BAR
14 psi



Maximum

40°C (104°F)

35°C (95°F)

+10%

5 BAR
70 psi

	Icon	+C° -C°	[Btu/h] [W]	[Ømm²]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	32°C 90°F 21°C 70°F	[kg] [lbs]	[kg] [lbs]
MF 56 AS	Icon	Icon	17152 5030	3x1.5	2000	16 A	10,2	18	4.8	94 207	103 227
MF 56 WS	Icon	Icon	17152 5030	3x1.5	2000	16 A	8,7	185	49	94 207	103 227
MF 56 ASR	Icon	Icon	17152 5030	3x1.5	2000	16 A	10,2	18	4.8	88 194	97 213

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg